

Plisé

Pleated blinds | Plissee



A modern interior







DECOMATIC pleated blinds as a part of a modern interior

Smart details, colours, unobtrusive look and modern design – all that make the DECOMATIC pleated blinds a perfect match for your modern interior.

DECOMATIC pleated blinds satisfy any needs, however demanding

Wide range of operating options and a variety of different types and shapes ensure their use for any window – vertical and swivel/tilt, sloping, arched, roof or ceiling windows and conservatories.

100% European quality

The DECOMATIC system and components originating in Germany guarantee flawless function, perfect design and long durability of the DECOMATIC pleated blinds.

Wide range of operating options



Handgrip simple, yet stylish and discreet control of pre-tensioned pleated blinds.



with an integrated cordlock and a cord drive system.



Ball chain smooth and quiet control using an endless chain.




Crank
used for ceiling windows,
skylights and winter gardens.
Operated using a detachable
crank with overload protection.



Motor lowering and lifting with the help of a 24V engine with a wall switch or a remote control.



Tilt rod anodized tilt rod with a joint for tensioned pleated blinds. Adapter for operation using a handle. Length: 1.00 m, 1.50 m or 2.00 m



Crank used for plafonds Length: 1.00 m, 1.50 m or 2.00 m



Motor crank
Electric control, used for plafonds.
Operated using a crank. Batteries
and charging adapter included.
Length: 1.00 m, 1.50 m or 2.00 m


3

Colours and details

Our elegant aluminium profiles are available in three colours: white, silver anodized and bronze. The colours of all visible plastic and metal parts always match. Profiles are available in any colour from the RAL scale. They are coated using the painted powder method.




Standard profile 13 mm



Standard profile – 13 mm (not embedded).

Pleated blind width: up to 70 cm


Reinforced profile 17 mm



Reinforced profile – 17 mm. Includes bottom profile to embed the tension bracket.


Pleated blind width: up to 100 cm

Reinforced profile 23 mm



Reinforced profile – 23 mm. Includes a double sided profile to embed the tension bracket.

Pleated blind width: up to 150 cm.



Handgrips

Plastic handgrips for manual control.



Cord clutch

Plastic cord clutch for manual control.



Brackets EXCLUSIVE

Design wall brackets intended for a glazing beam with a depth of less than 1,9 cm.



Clips

Fixing clips intended for standard assembly.



Tension brackets

Tension brackets used to mount pre-tension pleated blinds.



Textiles

The colours of textiles always match.

Atypical shapes





Sloping shape

Thanks to the wide variety of the DECOMATIC system it is possible to manufacture pleated blinds for sloping windows. Depending on the type they are operated using a handgrip, cord, chain or motor.


Arched shape

Systra, spol. s r.o. has developed a patented bending system, which allows the manufacture of arched pleated blinds with any radius.




www.systra.cz 5

Types

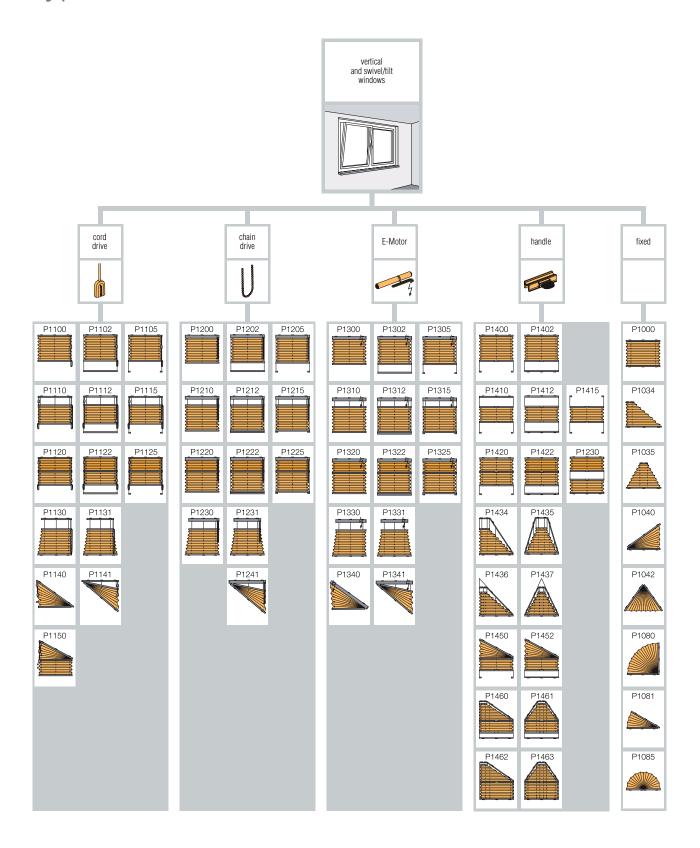

6 www.systra.cz

Types

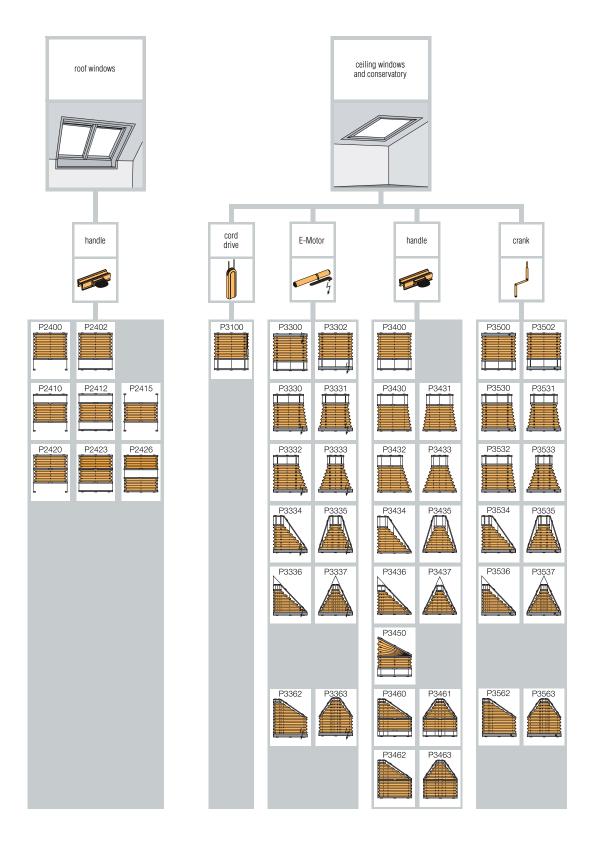

www.systra.cz 7

Systra, spol. s r. o.

> we have manufactured and supplied shading technology since 1991

> all components are of European origin

• we manufacture and deliver quality products, because we believe that our clients don't deserve any less!

Manufacturing plant in Tišnov

Na Zahrádkách 349

666 01 Tišnov, Czech Republic

tel.: +420 549 410 212 fax: +420 549 410 036 e-mail: vyroba@systra.cz

Sales office in Prague

Hyacintová 8

106 00 Praha - Záběhlice, Czech Republic

tel.: +420 267 312 078 fax: +420 267 312 078 e-mail: praha@systra.cz



