

**PLEATED
BLIND**




DECOMATIC®
Function + Fashion

Measuring and Ordering

DECOMATIC®
Function + Fashion

**PLEATED
BLIND**

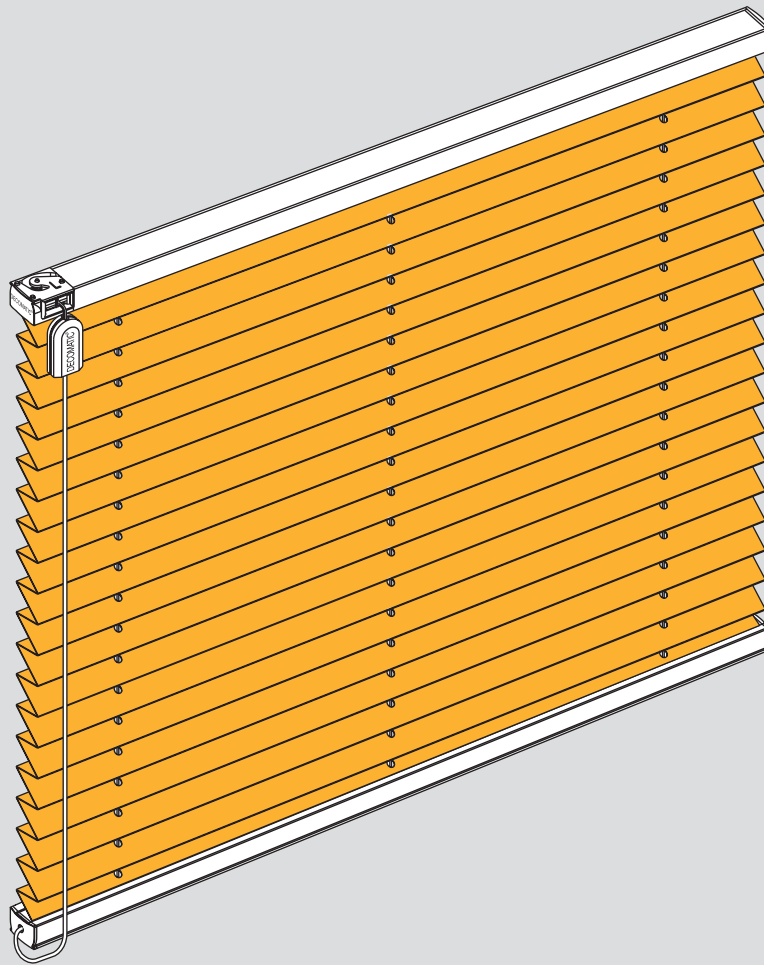

Measuring and Ordering



Cord Operation
Pleated blind
with integrated cord lock
without cord overtravel.



Chain Operation
Pleated blind
with chain drive.



Motor Operation
Opening and closing with
a 24 volt drive motor.



Handle Operation
Easy operation with
a handle.


Crank Operation
Pleated blind with
crank operation for
ceiling windows
and conservatory.



Profile Colours
Optional white powder-coated
or
silver, black and anodised bronze.
With colour matching plastic parts.

Fabric
20 mm pleat.

Vertical and swivel/tilt windows

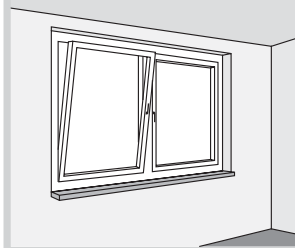


Cord drive




Chain drive



Electric motor




Handle




fixed

P1100




P. 10

P1105




P. 11

P1110




P. 12

P1115




P. 13

P1120




P. 14

P1125




P. 15

P1130




P. 16

P1131




P. 17

P1140



P. 18

P1141




P. 19

P1150




P. 20

P1200




P. 22

P1205




P. 23

P1210




P. 24

P1215




P. 25

P1220




P. 26

P1225




P. 27

P1230




P. 28

P1231




P. 29

P1241




P. 30

P1300




P. 32

P1305




P. 33

P1310




P. 34

P1315




P. 35

P1320




P. 36

P1325




P. 37

P1330



P. 38

P1331




P. 39

P1340




P. 40

P1341




P. 41

P1400




P. 42

P1402




P. 43

P1410




P. 44

P1415




P. 45

P1450




P. 46

P1460



P. 47

P1461




P. 48

P1060




P. 50

P1065







P. 51

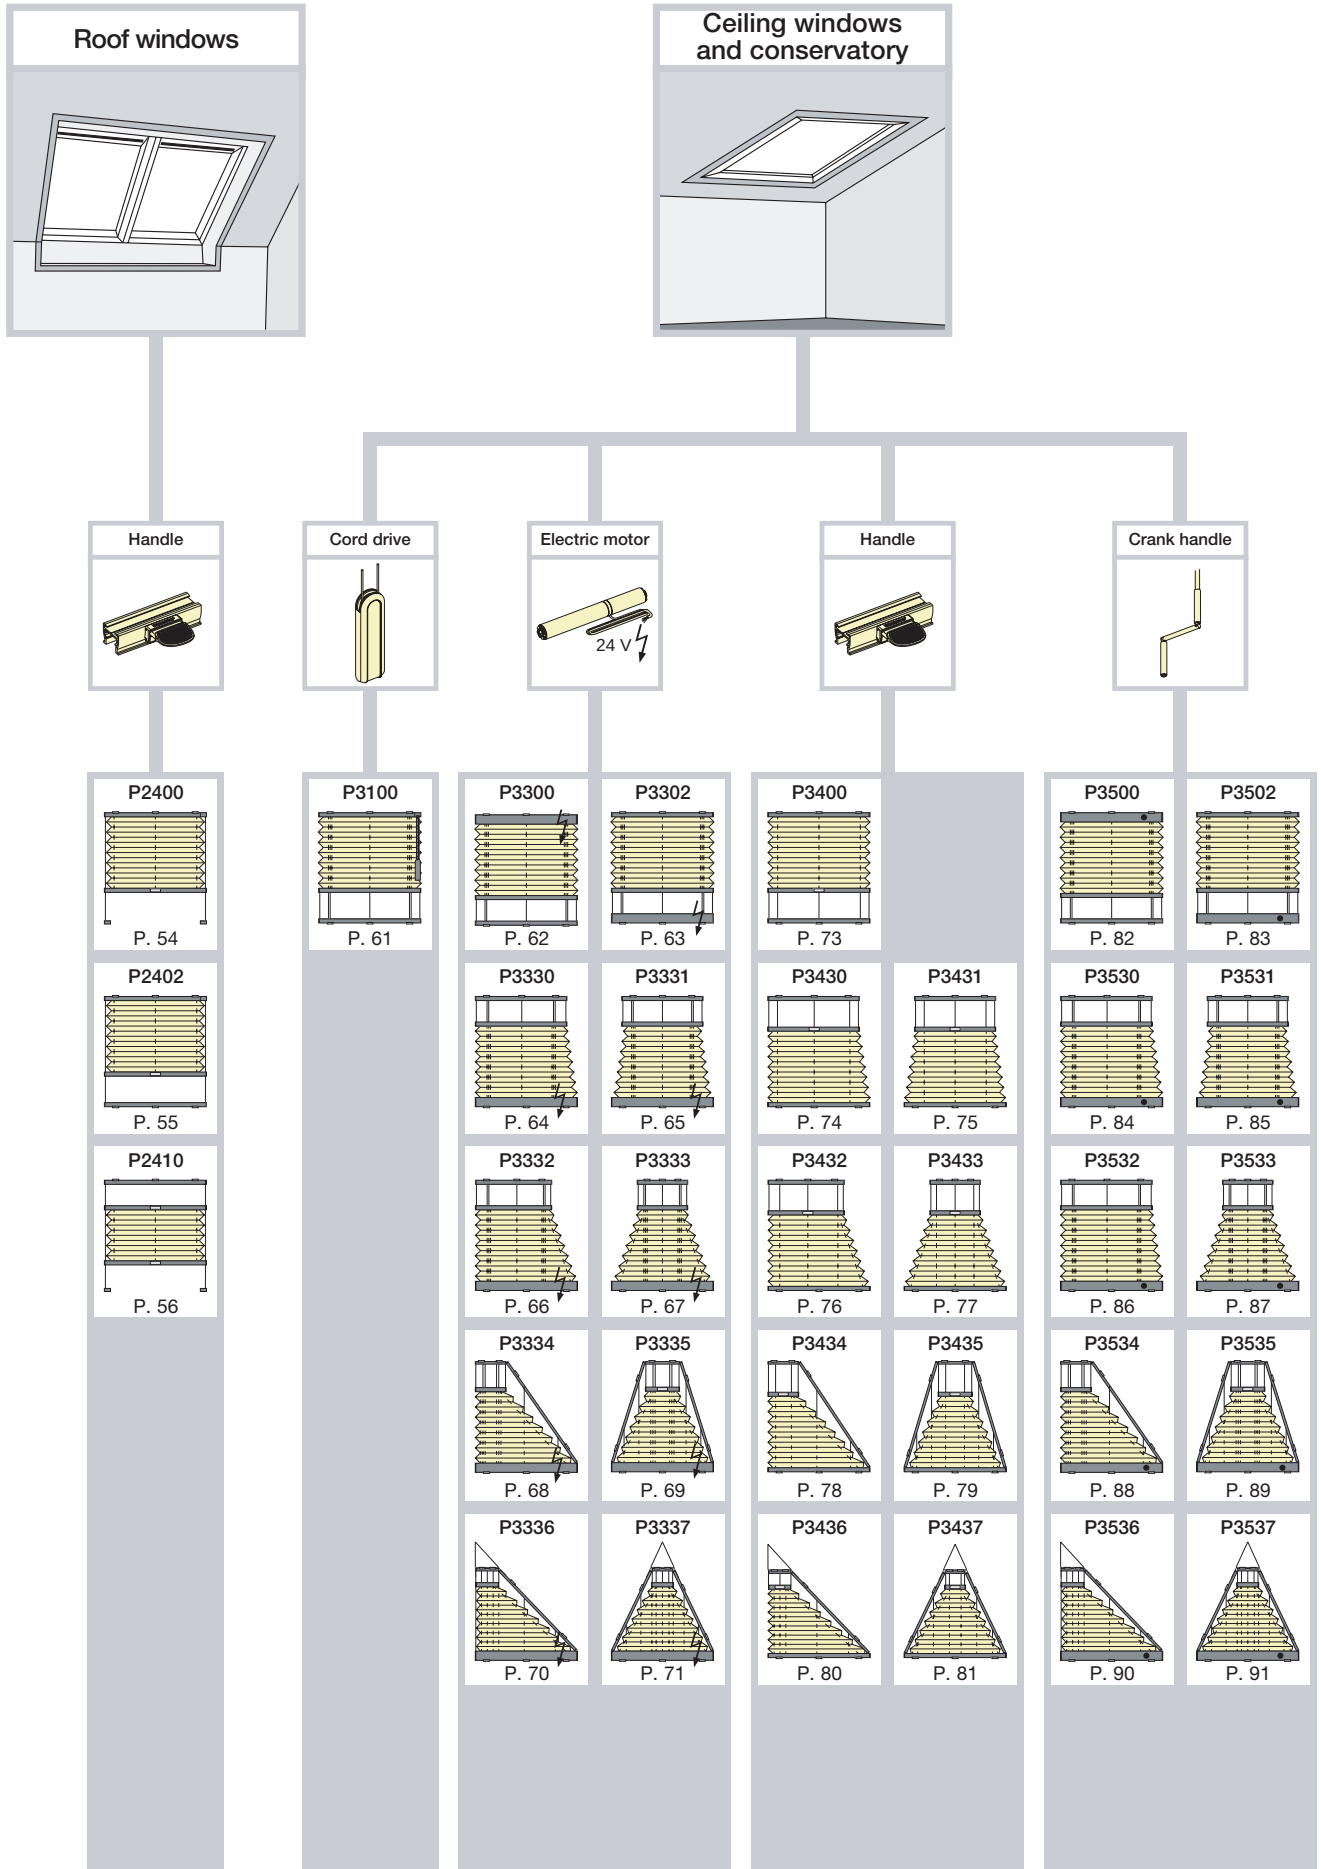

DECOMATIC® PLEATED BLIND





Mounting on the glazing bead

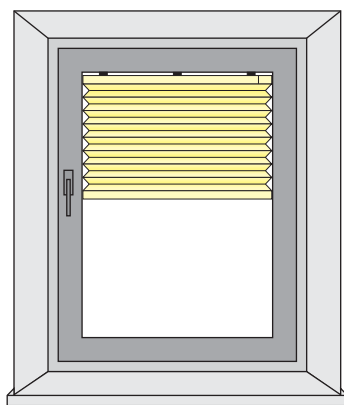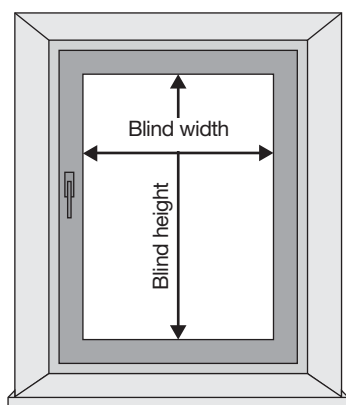

Note:
Smallest glazing
bead = 25 mm

Recommendation: Smallest measuring dimension minus 2 mm of each side = order dimension





Mounting on the wing of a window

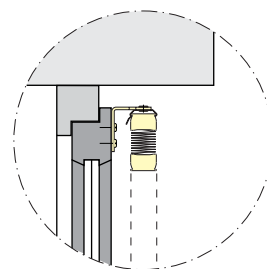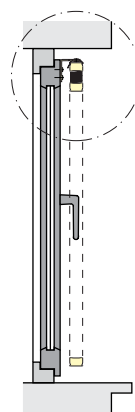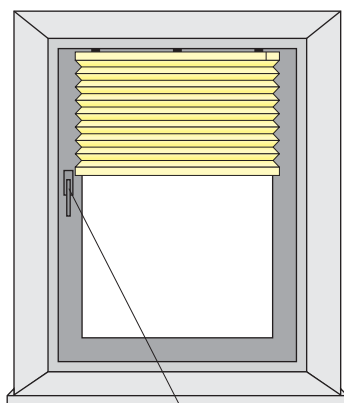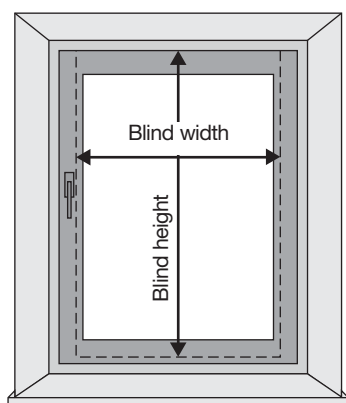

Note:
Consider protruding fittings
(window knob etc.)

Recommendation: Lateral overhang on each side approx. 20 mm (consider fittings)





Mounting in the reveal

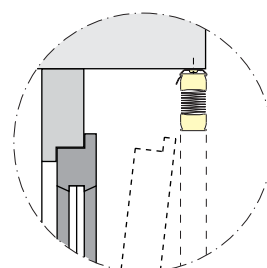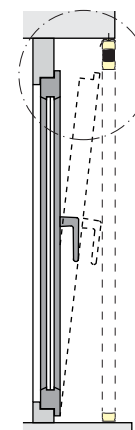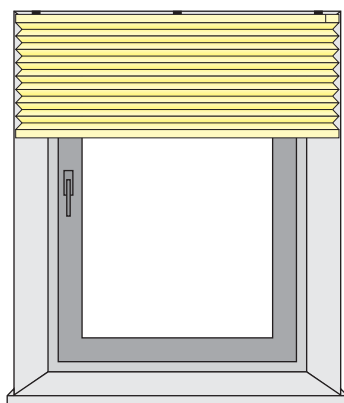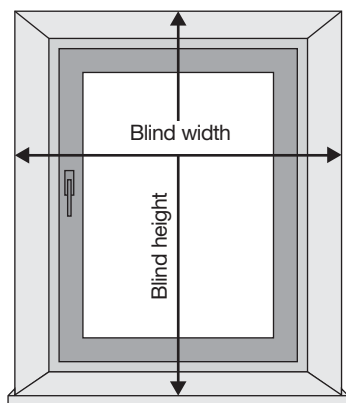

Note:
Consider stack height –
for window opening

Recommendation: Smallest measured dimension minus 2 mm of each side = order dimension


Mounting for face fixing

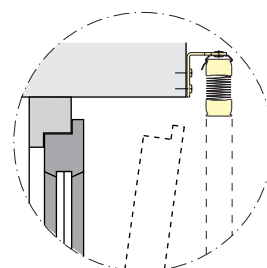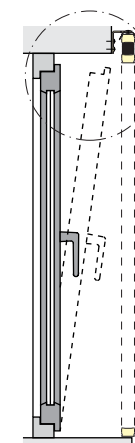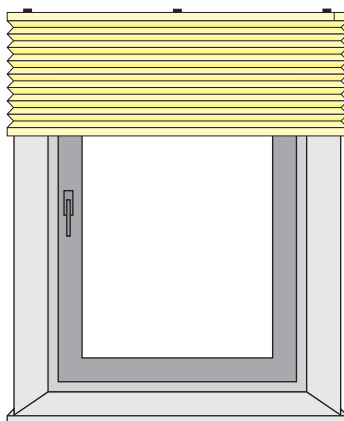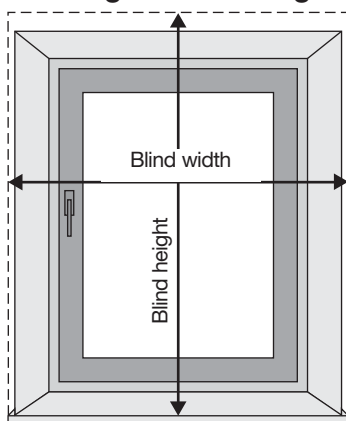


Note:
Consider mounting position –
for window opening

Recommendation: Lateral overhang on each side approx. 50 mm


Ceiling mounting

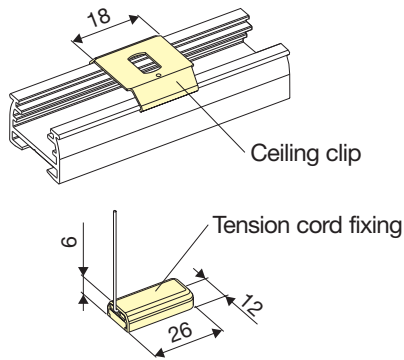


Standard profile with ceiling clip, 20 mm

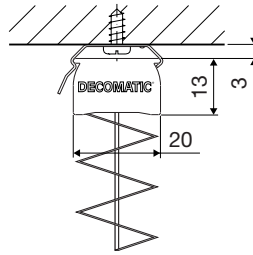


Motor/chain drive profile with ceiling clip, 27 mm

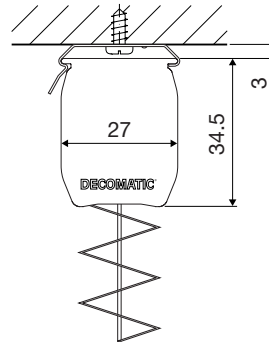


Cord guiding with tension cord fixing

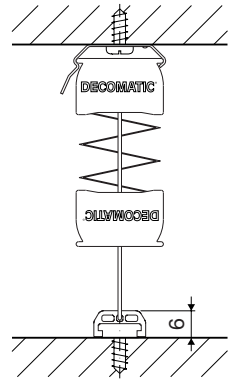


Wall mounting

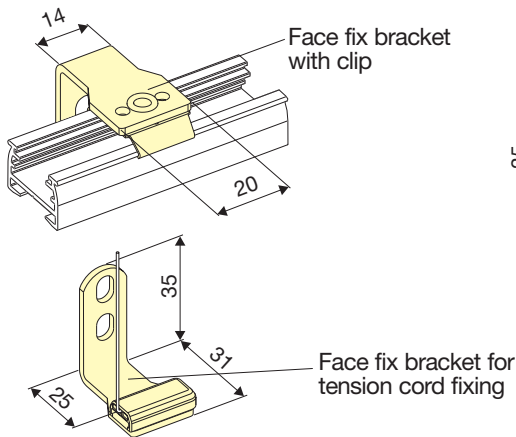

Standard profile with face fix bracket + clip

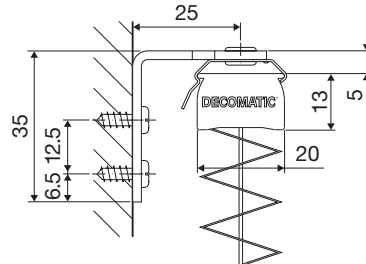


Tensioned blind with face fixing

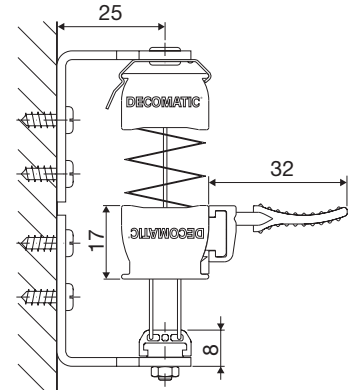


Wall mounting


(with variable face fix bracket)

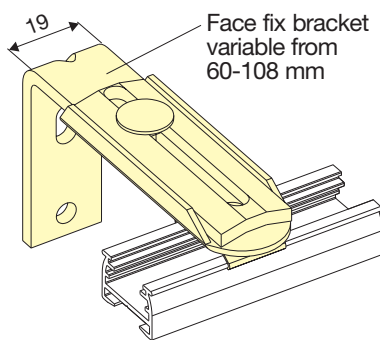


Standard profile with face fix bracket, 60-108 mm

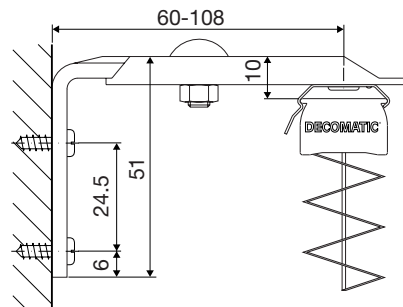


Blind with two hangings

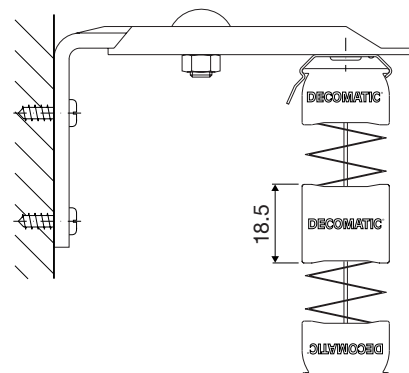


Mounting on the wing of the window

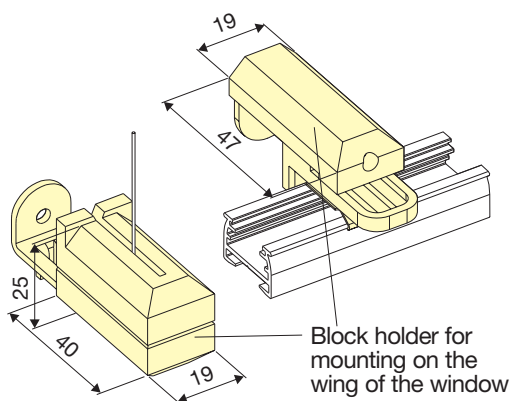

Standard profile with block holder + clip

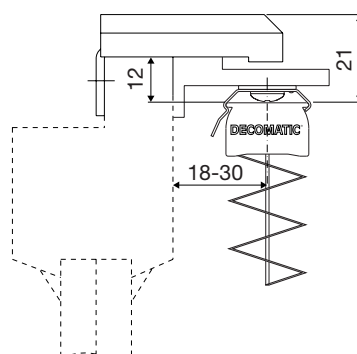


Cord fixation with block holder

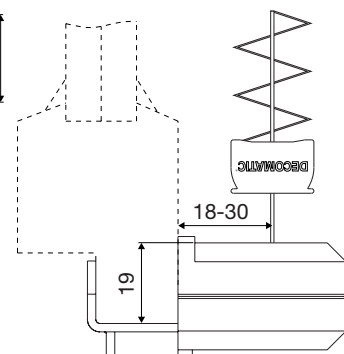

All dimensions in mm

Vertical and Swivel/Tilt Windows

Free-hanging blinds with different operation and hanging variants.
With cord guiding for swivel/tilt windows
max. angle of inclination 15°.
Tensioned blinds with handle operation
or special shapes (fixed).

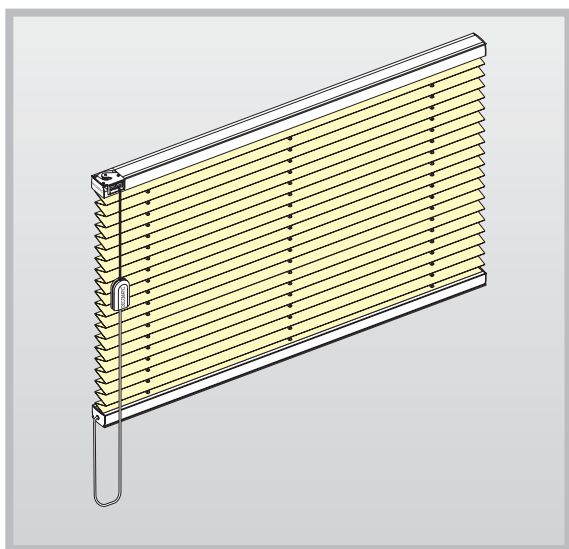


Cord operation

Pleated blind with integrated cord lock without cord overtravel.

Blind width: 0.30-2.20 m

Blind height: max. 2.60 m

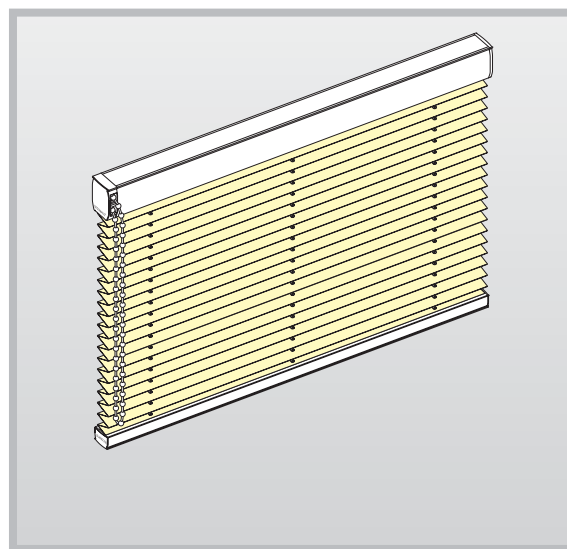


Chain operation

Pleated blind with chain drive.

Easy operation with continuous loop chain.


Blind width: 0.40-2.20 m

Blind height: max. 2.60 m

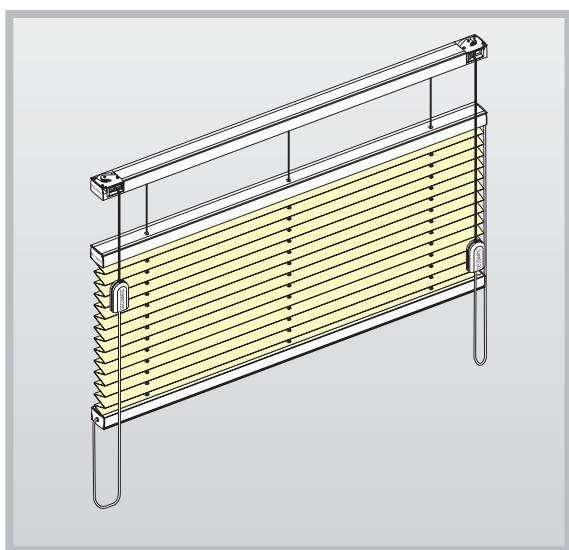



Variable hanging

The hanging can also be opened from the top with a second operation unit.

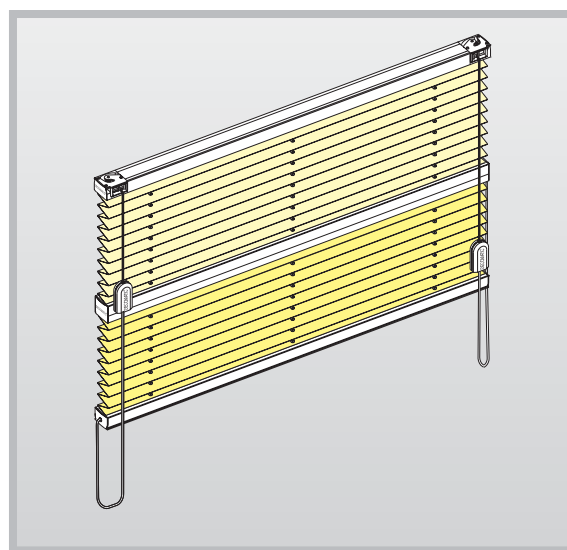

Two hangings

Two different hangings are combined within one unit.
Both hangings can be operated separately.

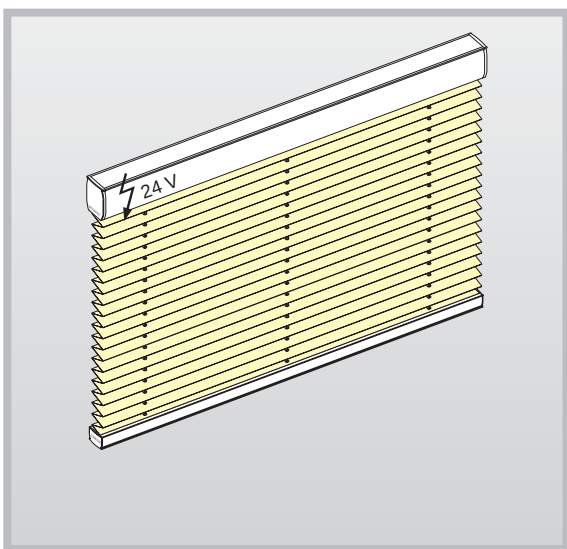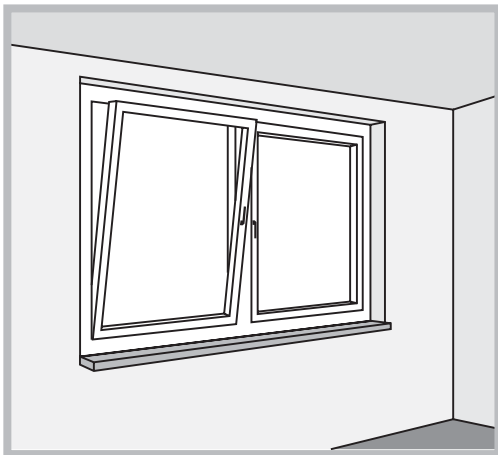


Motor operation

Opening and closing with a 24 volt drive motor.

Blind width: 0.70-2.20 m

Blind height: max. 2.60 m

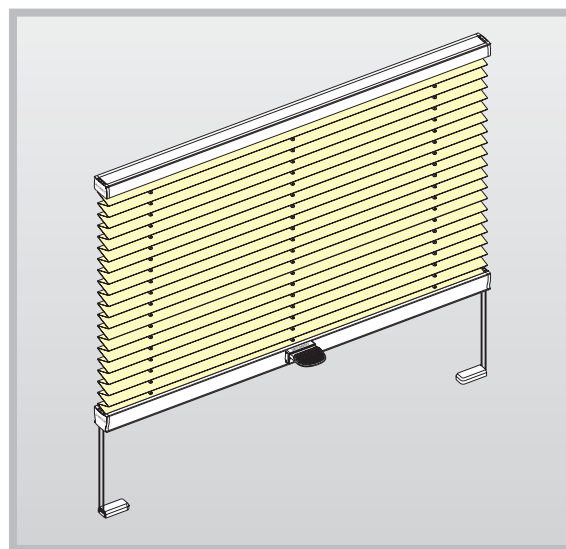

Handle operation

Tensioned blind with handle.


For vertical and swivel/tilt windows max. angle of inclination 15°.

Blind width: 0.20-1.50 m

Blind height: max. 2.20 m

Max. blind width of 0.70 m = standard profile or optional tension profile.


From blind width of 0.70 m = tension profile.

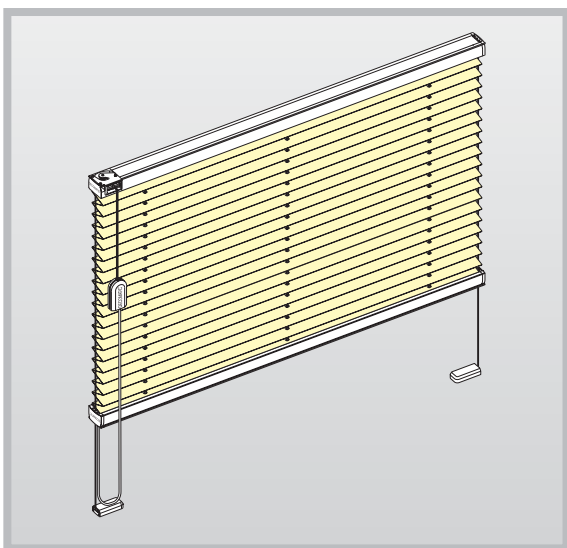

Cord guiding


Side guiding with a tensioned wire. For swivel/tilt windows up to max. 15° inclination angle. Optional use of a tension profile.

Standard profile 13 mm

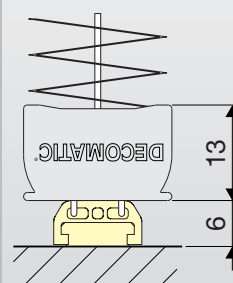

Placed upon tension cord fixing. Light gap = 6 mm.

Tension profile 17 mm

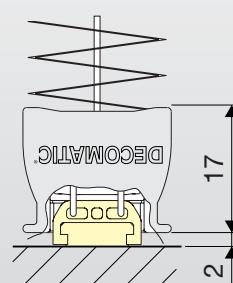


Covers the tension cord fixing and prevents deflection of the tensioned blinds.

Use of a **tension profile** is optional in the case of blinds with side guiding.

In the case of tensioned blinds it can be used from a blind width of 0.70 m upwards. Optional for smaller blind widths.

Type P1100

Blind width:	min. 0.30 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.60 m
Operating side:	optional left or right
Operating height:	standard dimension = blind height (or longer)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze

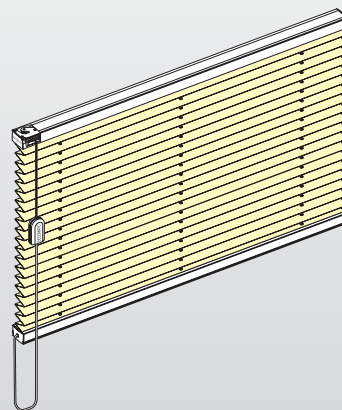

Free-hanging blind with cord operation



TYPE P1100

Measuring and Pricing

Blind width	=	order width
Blind height	=	order height

Pricing: width (W) x height (H) = list price

Order dimensions: W, H

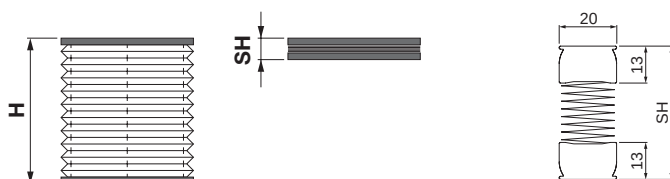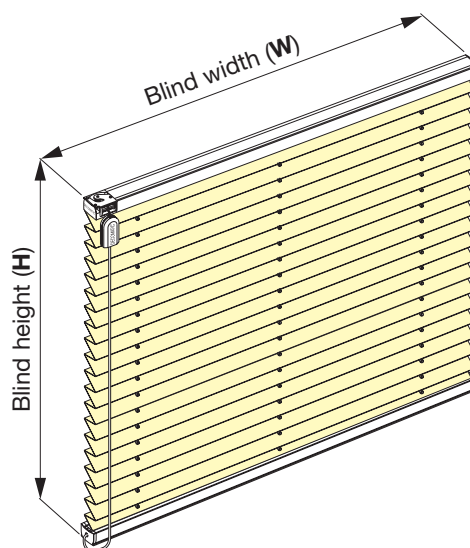

Blind height H


0.50 m
1.00 m
1.50 m
2.00 m
2.60 m

Stack height SH


31-35 mm
34-42 mm
38-49 mm
42-56 mm
46-64 mm

Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1105

Blind width:	min. 0.30 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.60 m
Angle of inclination:	max. 15°
Operating side:	optional left or right
Operating height:	standard dimension = blind height (or longer)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Option:	tension profile (see page 9)

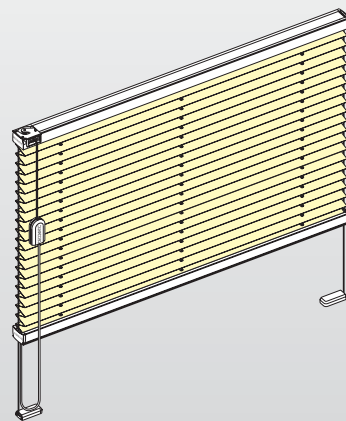

Free-hanging blind with cord operation and cord guiding

TYPE P1105



Cord Drive

Measuring and Pricing

Blind width	=	order width
Blind height	=	order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P1105

Order dimensions: W, H

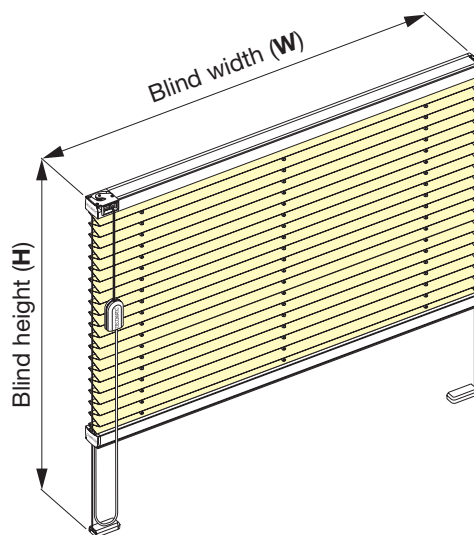

Blind height H

0.50 m
1.00 m
1.50 m
2.00 m
2.60 m




Stack height SH (a)

31-35 mm
34-42 mm
38-49 mm
42-56 mm
46-64 mm




Stack height SH (b)

35-39 mm
38-46 mm
42-53 mm
46-60 mm
50-68 mm




SH (a)
Standard




SH (b)
Optional with tension profile

Accessories


Ceiling fixing with ceiling clip



Wall fixing with face fix bracket




Wall fixing with tension cord angle



Type P1110

Blind width:	min. 0.30 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.60 m
Operating side:	left and right
Operating height:	standard dimension = blind height (or longer)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze

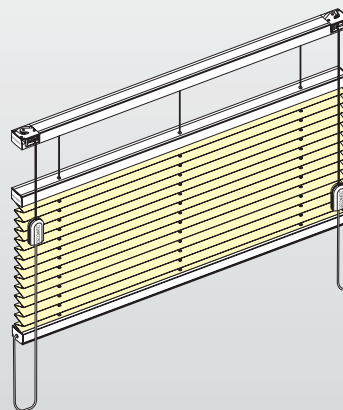

Free-hanging blind with two cord operation units and variable hanging



TYPE P1110

Measuring and Pricing

Blind width	=	order width
Blind height	=	order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P1110

Order dimensions: W, H

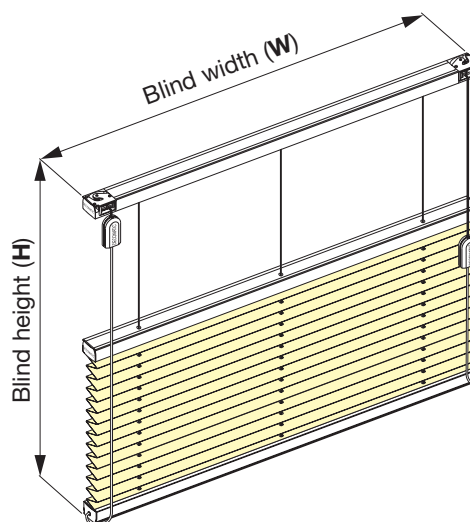


Blind height H

0.50 m
1.00 m
1.50 m
2.00 m
2.60 m




Stack height SH

44-48 mm
48-55 mm
51-62 mm
55-69 mm
59-77 mm




Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1115

Blind width:	min. 0.30 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.60 m
Angle of inclination:	max. 15°
Operating side:	left and right
Operating height:	standard dimension = blind height (or longer)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Option:	tension profile (see page 9)

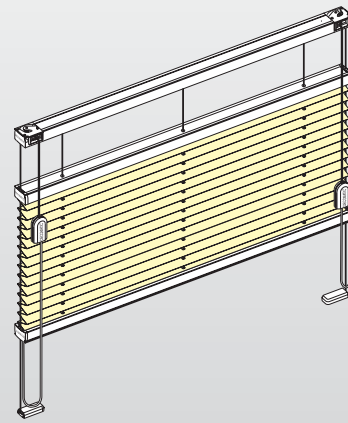

Free-hanging blind with two cord operation units, variable hanging and cord guiding

TYPE P1115



Cord Drive

Measuring and Pricing

Blind width = order width
Blind height = order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P1115

Order dimensions: W, H

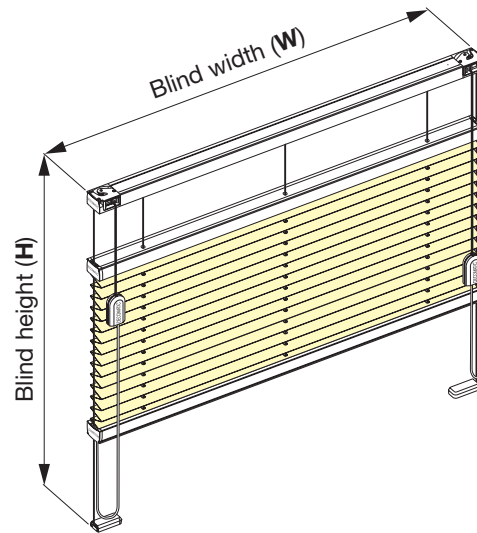

Blind height H

0.50 m
1.00 m
1.50 m
2.00 m
2.60 m




Stack height SH (a)

44-48 mm
48-55 mm
51-62 mm
55-69 mm
59-77 mm




Stack height SH (b)

48-52 mm
52-59 mm
55-66 mm
59-73 mm
63-81 mm




SH (a)
Standard




SH (b)
Optional with
tension profile

Accessories


Ceiling fixing
with
ceiling clip



Wall fixing
with
face fix bracket




Wall fixing
with
tension cord angle



Type P1120

Blind width:	min. 0.30 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.60 m
Operating side:	left and right
Operating height:	standard dimension = blind height (or longer)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze

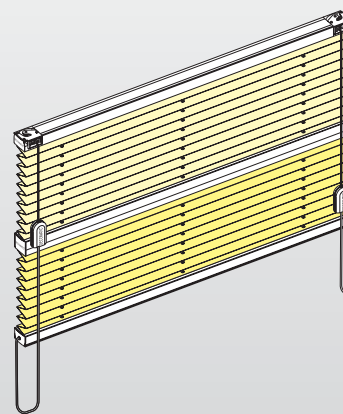

Free-hanging blind with two cord operation units and two hangings


TYPE P1120




Measuring and Pricing

Blind width	=	order width
Blind height	=	order height

Pricing: width (W) x height (H) = list price
= list price of the upper hanging
+ list price of the bottom hanging


Order dimensions: W, H

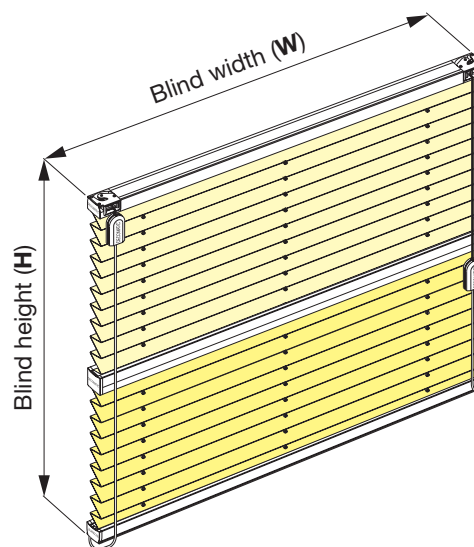


		
Blind height H	Stack height SH	
0.50 m	50-53 mm	
1.00 m	53-60 mm	
1.50 m	56-67 mm	
2.00 m	60-74 mm	
2.60 m	64-82 mm	

Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1125

Blind width:	min. 0.30 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.60 m
Angle of inclination:	max. 15°
Operating side:	left and right
Operating height:	standard dimension = blind height (or longer)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Option:	tension profile (see page 9)

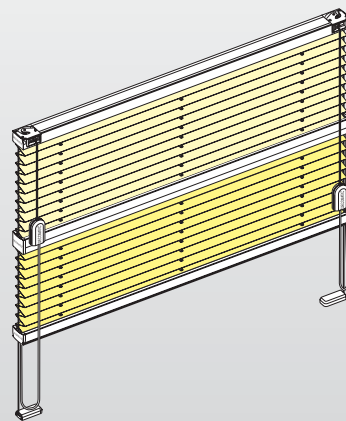

Free-hanging blind with two cord operation units, two hangings and cord guiding

TYPE P1125



Cord Drive

Measuring and Pricing

Blind width	=	order width
Blind height	=	order height


Pricing: width (W) x height (H) = list price
= list price of the upper hanging
+ list price of the bottom hanging
+ additional charge for type P1125

Order dimensions: W, H

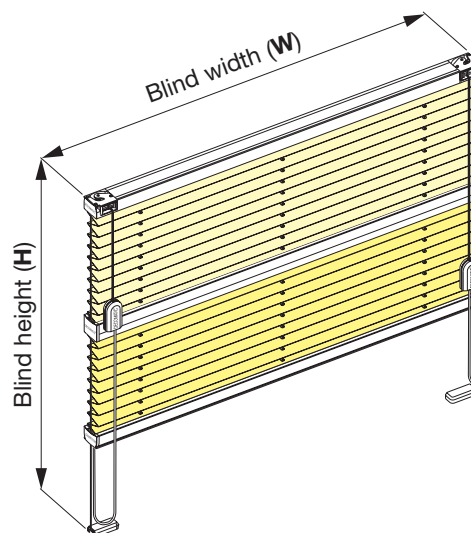


Blind height H

0.50 m
1.00 m
1.50 m
2.00 m
2.60 m




Stack height SH (a)

50-53 mm
53-60 mm
56-67 mm
60-74 mm
64-82 mm




Stack height SH (b)

54-57 mm
57-64 mm
60-71 mm
64-78 mm
68-86 mm




SH (a)
Standard




SH (b)
Optional with tension profile

Accessories


Ceiling fixing with ceiling clip



Wall fixing with face fix bracket




Wall fixing with tension cord angle



Type P1130

Blind width:	min. 0.30 m + difference in width max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.60 m
Difference in width:	max. 0.15 m
Operating side:	optional left or right
Operating height:	standard dimension = blind height (or longer)
Hanging slope:	optional left or right
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze

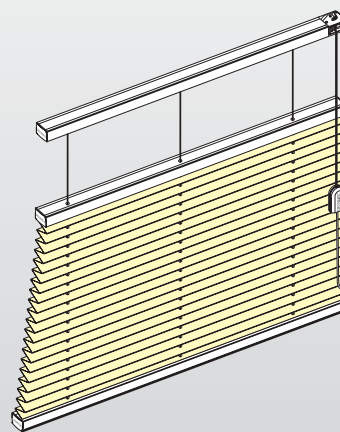

Free-hanging blind with cord operation and a one-sided sloped hanging (up to 0.15 m)

TYPE P1130




Measuring and Pricing

Blind width = order width
Blind height = order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P1130


Order dimensions: W, H, W₂

Note: please attach sketch

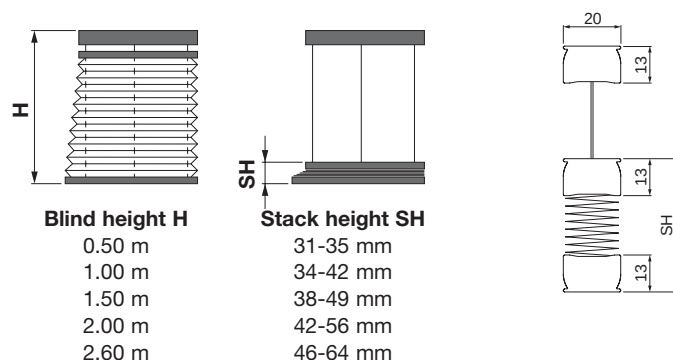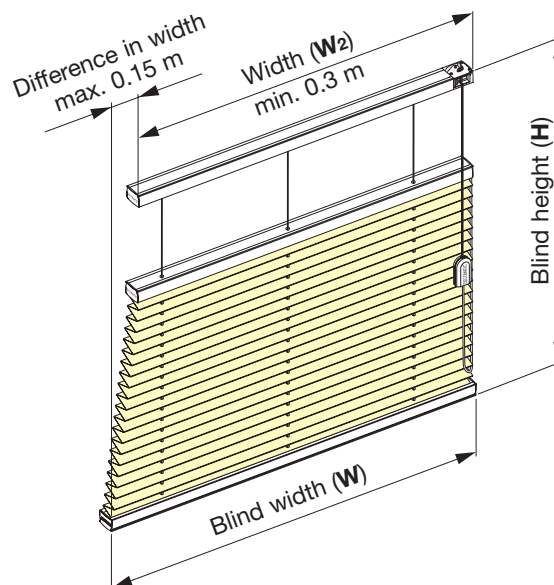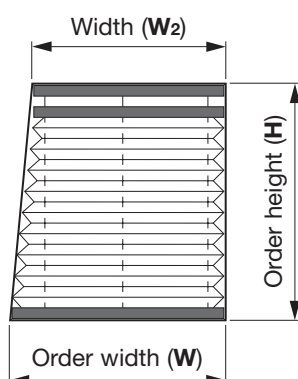


Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1131

Blind width:	min. 0.30 m + 2 x difference in width max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.60 m
Difference in width:	max. 0.15 m each side
Operating side:	optional left or right
Operating height:	standard dimension = blind height (or longer)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze

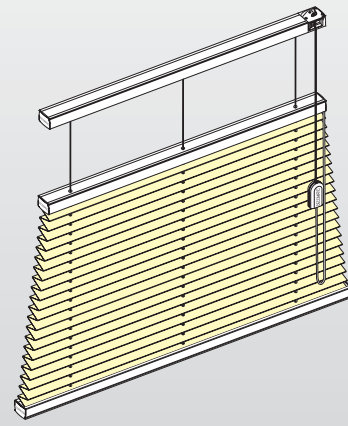

Free-hanging blind with cord operation and a two-sided sloped hanging (up to 0.15 m each side)

TYPE P1131

Cord Drive




Measuring and Pricing

Blind width = order width
Blind height = order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P1131


Order dimensions: W, H, W₂

Note: please attach sketch

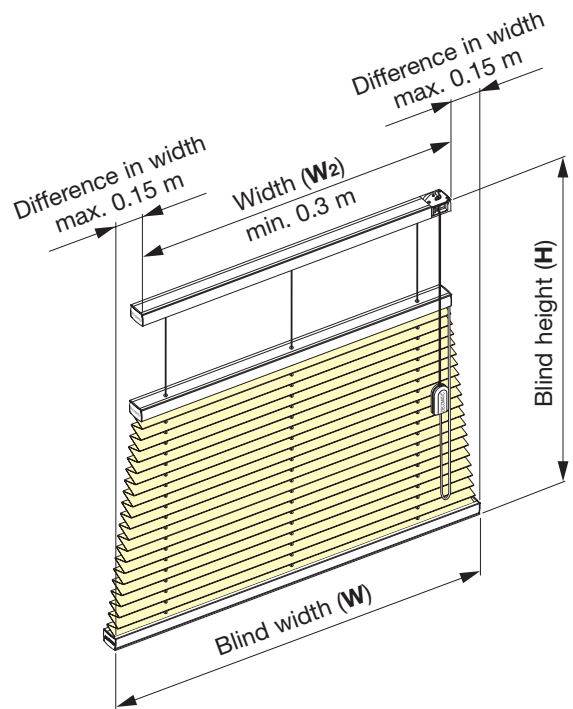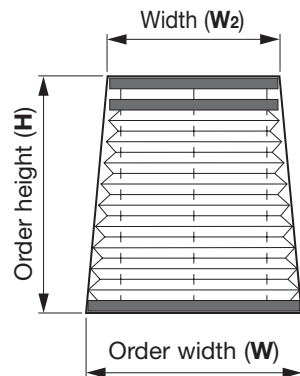


Blind height H

0.50 m
1.00 m
1.50 m
2.00 m
2.60 m




Stack height SH

31-35 mm
34-42 mm
38-49 mm
42-56 mm
46-64 mm




Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1140

Blind width:	min. 0.50 m max. dependent on W₂
Width W₂:	max. 2.00 m up to 60° (dependent on the fabric) max. 2.20 m up to 30° (dependent on the fabric)
Blind height:	max. 1.70 m (see picture on page 97)
Blind angle:	5°-20° (operation with clamping) 20°-60° (operation without clamping)
Operating side:	on the high side of the blind
Operating height:	standard dimension = blind height x 0.6 (measured from the topmost edge of the track)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze

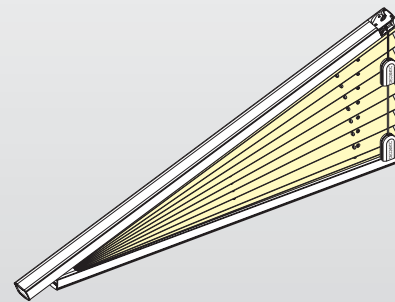

Free-hanging triangular blind
with cord operation

TYPE P1140




Measuring and Pricing

Blind width = **order width**
Blind height = **order height**

Pricing: width (W) x height (H) = list price
+ additional charge for type P1140


Order dimensions: W, HL or HR, W₂, (Angle)

Note: please attach sketch

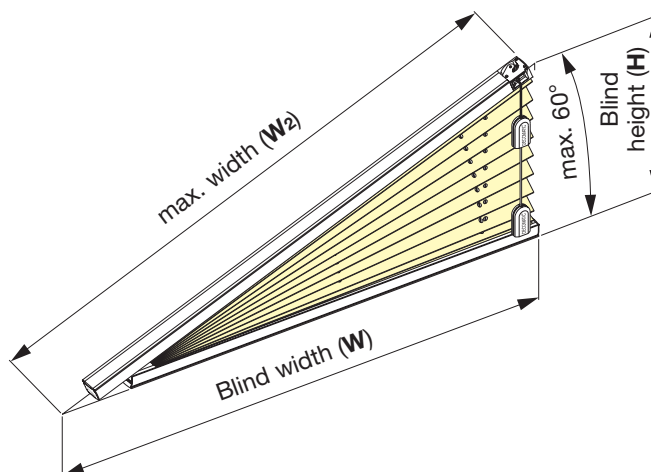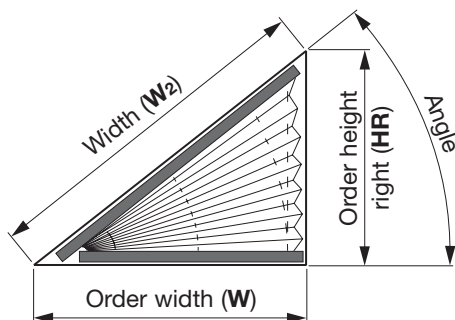


Blind height H

0.50 m
1.00 m
1.50 m
2.00 m




Stack height SH

31-35 mm
34-42 mm
38-49 mm
42-56 mm




Accessories


Ceiling fixing
with
ceiling clip



Wall fixing
with
face fix bracket




Cord clamp



Type P1141

Blind width:	min. 0.50 m max. dependent on W₂
Width W₂:	max. 2.00 m up to 60° (dependent on the fabric) max. 2.20 m up to 30° (dependent on the fabric)
Blind height:	max. 1.70 m (see picture on page 97)
Blind angle:	5°-60°
Operating side:	optional left or right
Operating height:	standard dimension = blind height x 0.6 (measured from the topmost edge of the track)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze

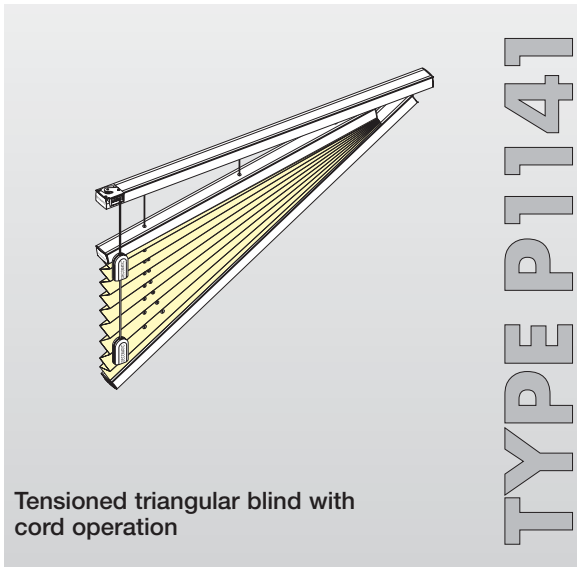


Measuring and Pricing

Blind width = order width
Blind height = order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P1141


Order dimensions: W, HL or HR, W₂, (Angle)

Note: please attach sketch

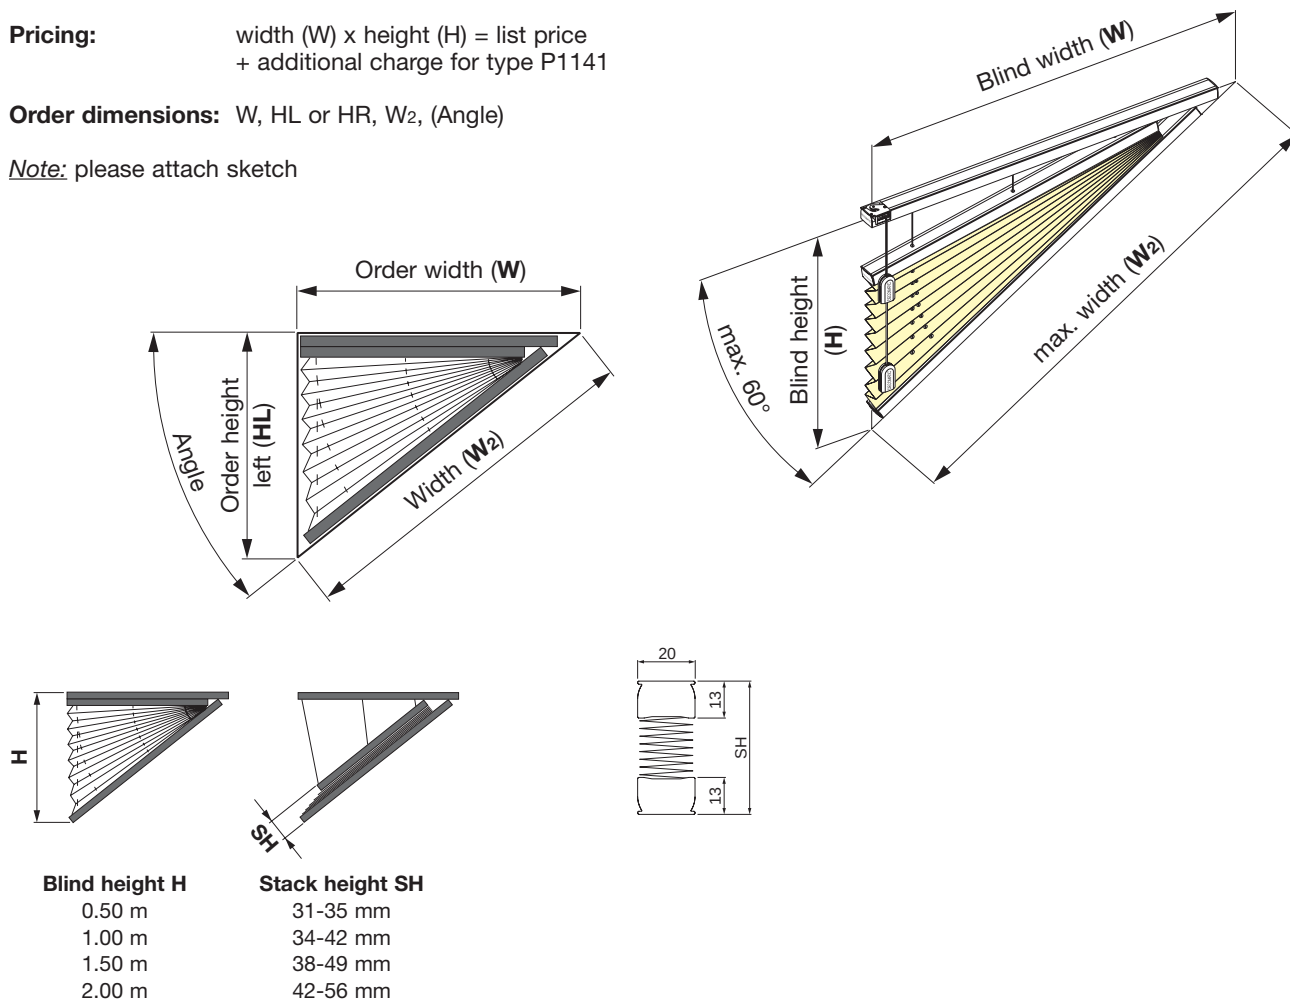


Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1150

Blind width:	min. 0.50 m max. dependent on W₂
Width W₂:	max. 2.00 m up to 60° (dependent on the fabric) max. 2.20 m up to 30° (dependent on the fabric)
Blind height:	max. 3.00 m (see picture on page 97)
Blind angle:	5°-60°
Operating side:	on the high side of the blind
Operating height:	standard dimension = blind height x 0.6 (measured from the topmost edge of the track)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze

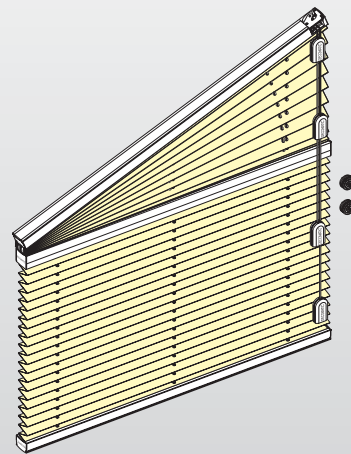

Free-hanging slope blind with cord operation without clamping

TYPE P1150




Measuring and Pricing

Blind width = **order width**
Blind height = **order height**

Pricing: width (W) x height (H) = list price
+ additional charge for type P1150


Order dimensions: W, HL or HR, W₂, (Angle)

Note: please attach sketch

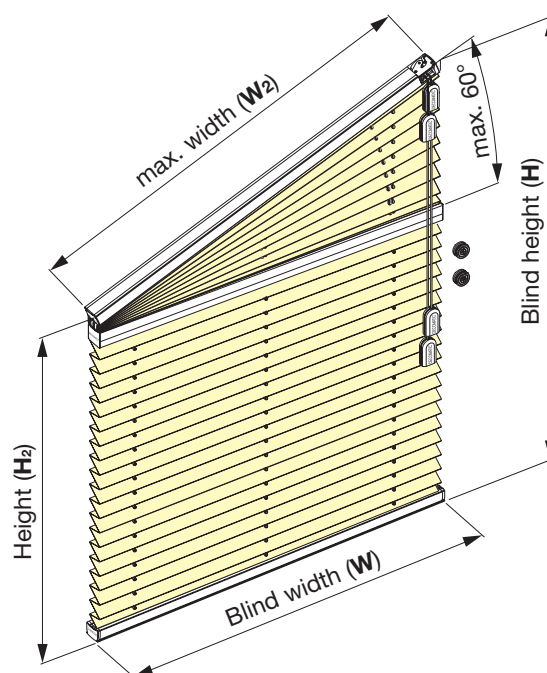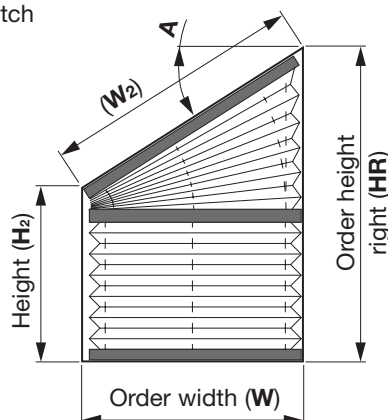


Blind height H

1.00 m
1.50 m
2.00 m
2.50 m
3.00 m




Stack height SH

53-60 mm
56-67 mm
60-74 mm
64-81 mm
67-88 mm




Accessories


Ceiling fixing with
ceiling clip



Wall fixing with
face fix bracket




Cord clamp



Type P1200

Blind width:	min. 0.40 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.60 m
Operating side:	optional left or right
Operating height:	standard dimension = blind height x 0.75 (measured from the topmost edge of the track)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze

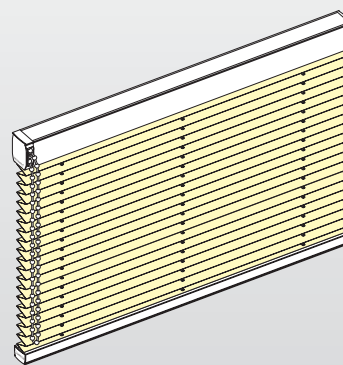

Free-hanging blind with
chain operation



TYPE P1200

Measuring and Pricing

Blind width	=	order width
Blind height	=	order height


Pricing: width (W) x height (H) = list price
+ additional charge for type P1200

Order dimensions: W, H

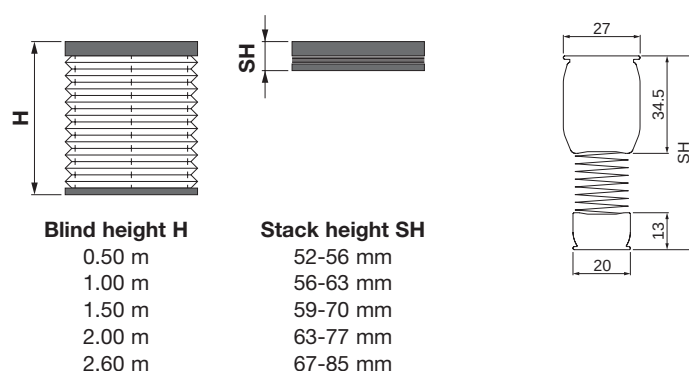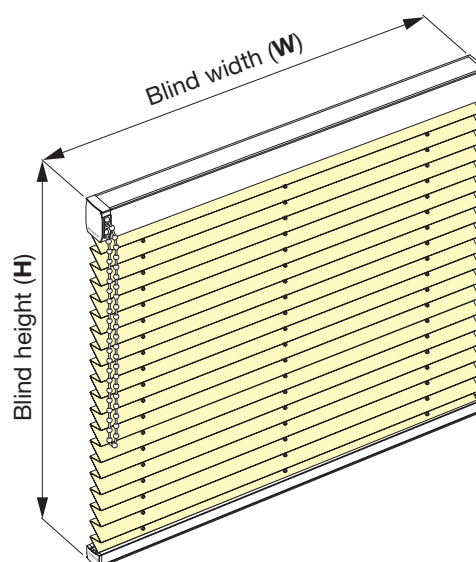


Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1205

Blind width:	min. 0.40 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.60 m
Angle of inclination:	max. 15°
Operating side:	optional left or right
Operating height:	standard dimension = blind height x 0.75 (measured from the topmost edge of the track)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Option:	tension profile (see page 9)

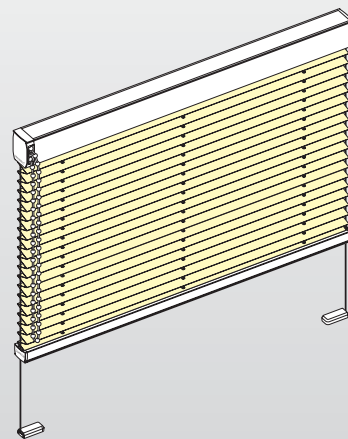

Free-hanging blind with
chain operation and
cord guiding

TYPE P1205



Chain
Drive

Measuring and Pricing

Blind width = order width
Blind height = order height


Pricing: width (W) x height (H) = list price
+ additional charge for type P1205

Order dimensions: W, H

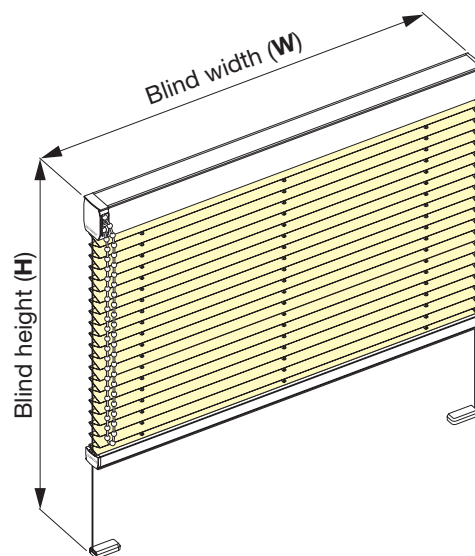


Blind height H

0.50 m
1.00 m
1.50 m
2.00 m
2.60 m




Stack height SH (a)

52-56 mm
56-63 mm
59-70 mm
63-77 mm
67-85 mm




Stack height SH (b)

56-60 mm
60-67 mm
63-74 mm
67-81 mm
71-89 mm




SH (a)
Standard

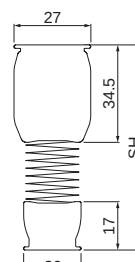


SH (b)
Optional with
tension profile

Accessories


Ceiling fixing
with
ceiling clip



Wall fixing
with
face fix bracket




Wall fixing
with
tension cord angle



Type P1210

Blind width:	min. 0.60 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.00 m
Operating side:	optional left or right
Operating height:	standard dimension = blind height x 0.75 (measured from the topmost edge of the track)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze

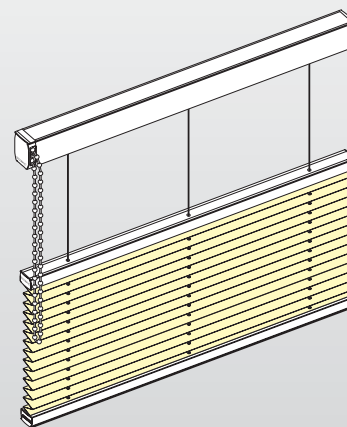

Free-hanging blind with chain operation and variable hanging



TYPE P1210

Measuring and Pricing

Blind width	=	order width
Blind height	=	order height


Pricing: width (W) x height (H) = list price
+ additional charge for type P1210

Order dimensions: W, H

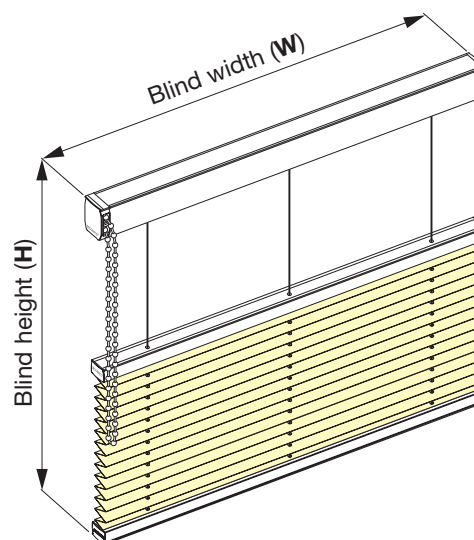



Blind height H

0.50 m
1.00 m
1.50 m
2.00 m



Stack height SH

65-69 mm
69-76 mm
72-83 mm
76-90 mm




Note:


For functional reasons, the bottom profile of the blind must have a clearance of at least 5-10 mm (e. g. from the window sill).

Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1215

Blind width:	min. 0.60 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.00 m
Angle of inclination:	max. 15°
Operating side:	optional left or right
Operating height:	standard dimension = blind height x 0.75 (measured from the topmost edge of the track)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze

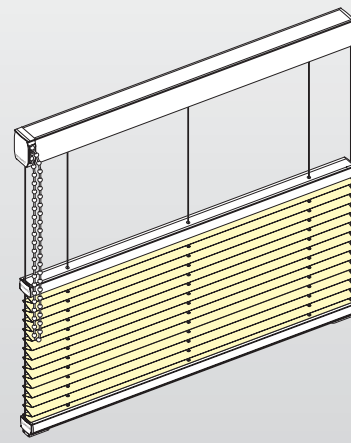

Free-hanging blind with
chain operation, variable
hanging and cord guiding

TYPE P1215



Chain
Drive

Measuring and Pricing

Blind width = order width
Blind height = order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P1215

Order dimensions: W, H

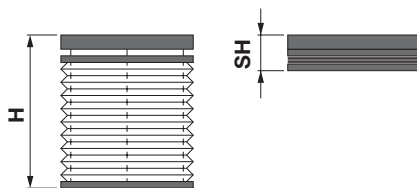
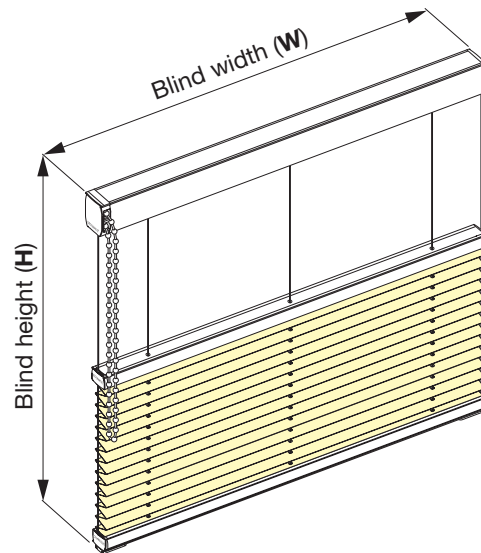


Blind height H

0.50 m
1.00 m
1.50 m
2.00 m

Stack height SH

65-69 mm
69-76 mm
72-83 mm
76-90 mm




Note:


For functional reasons, the
bottom profile of the blind
must have a clearance of at
least 5-10 mm (for securing
the tensioning cord).

Accessories


Ceiling fixing
with
ceiling clip



Wall fixing
with
face fix bracket




Wall fixing
with
tension cord angle



Type P1220

Blind width:	min. 0.60 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.00 m
Operating side:	optional left or right
Operating height:	standard dimension = blind height x 0.75 (measured from the topmost edge of the track)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Hanging:	heavy hanging always on bottom
Profile colour:	optional aluminium, white, black or bronze

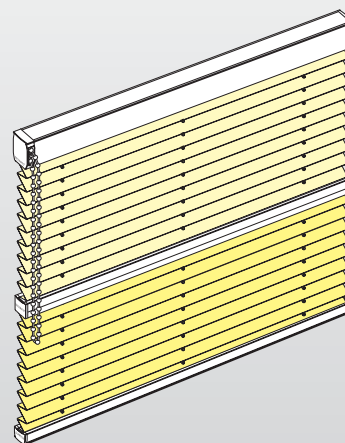

Free-hanging blind with chain operation and two hangings


TYPE P1220


Measuring and Pricing



Blind width	=	order width
Blind height	=	order height

Pricing: width (W) x height (H) = list price
= list price of the upper hanging
+ list price of the bottom hanging
+ additional charge for type P1220

Order dimensions: W, H

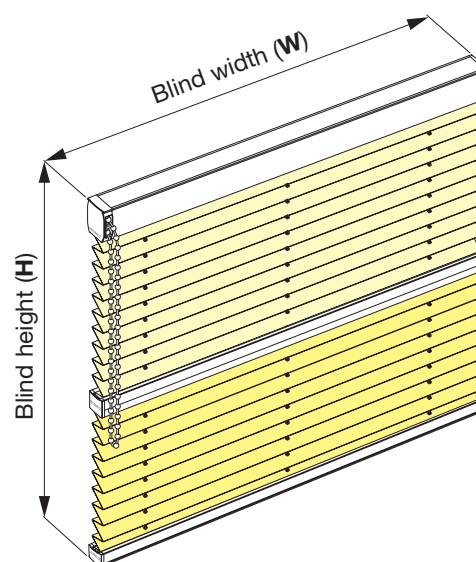

	
Blind height H	Stack height SH
0.50 m	71-75 mm
1.00 m	74-82 mm
1.50 m	78-89 mm
2.00 m	81-95 mm




Note:


For functional reasons, the bottom profile of the blind must have a clearance of at least 5-10 mm (e. g. from the window sill).

Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1225

Blind width:	min. 0.60 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.00 m
Angle of inclination:	max. 15°
Operating side:	optional left or right
Operating height:	standard dimension = blind height x 0.75 (measured from the topmost edge of the track)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Hanging:	heavy hanging always on bottom
Profile colour:	optional aluminium, white, black or bronze

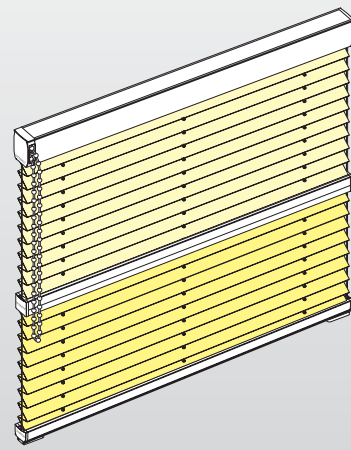

Free-hanging blind with
chain operation, two hangings
and cord guiding

TYPE P1225



Chain
Drive

Measuring and Pricing

Blind width	=	order width
Blind height	=	order height


Pricing: width (W) x height (H) = list price
= list price of the upper hanging
+ list price of the bottom hanging
+ additional charge for type P1225

Order dimensions: W, H

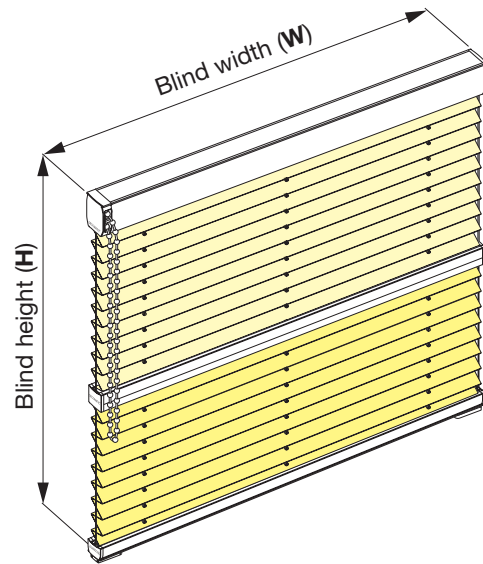



Blind height H

0.50 m
1.00 m
1.50 m
2.00 m



Stack height SH

71-75 mm
74-82 mm
78-89 mm
81-95 mm




Note:


For functional reasons, the bottom profile of the blind must have a clearance of at least 5-10 mm (for securing the tensioning cord).

Accessories


Ceiling fixing
with
ceiling clip



Wall fixing
with
face fix bracket




Wall fixing
with
tension cord angle



Type P1230

Blind width:	min. 0.40 m + difference in width max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.60 m
Difference in width:	max. 0.15 m
Operating side:	optional left or right
Operating height:	standard dimension = blind height x 0.75 (measured from the topmost edge of the track)
Hanging slope:	optional left or right
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze

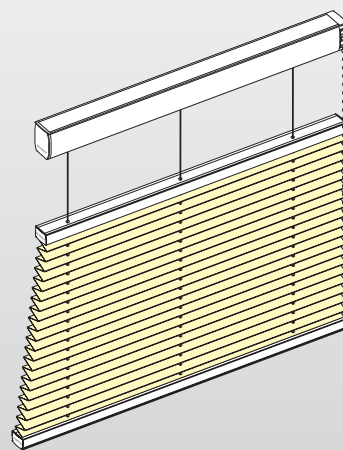

Free-hanging blind with
chain operation and a one-sided
sloped hanging (up to 0.15 m)

TYPE P1230




Measuring and Pricing

Blind width = order width
Blind height = order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P1230


Order dimensions: W, H, W₂

Note: please attach sketch

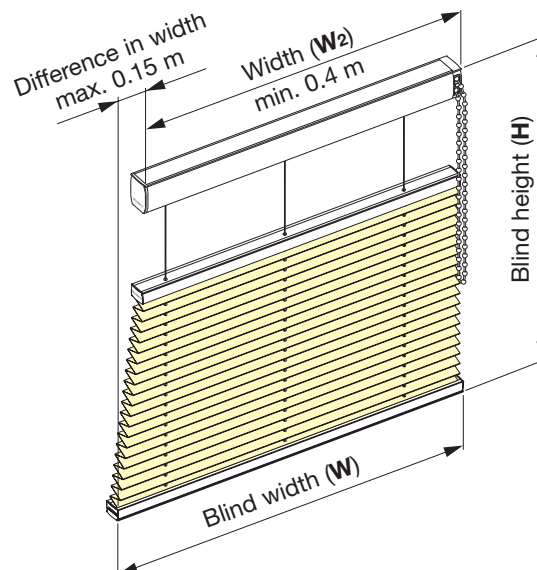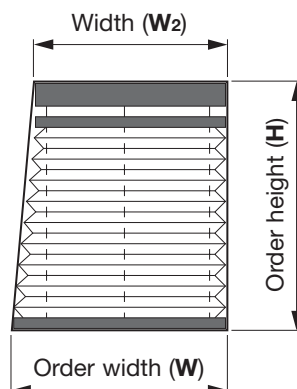


Blind height H

0.50 m
1.00 m
1.50 m
2.00 m
2.60 m





Stack height SH

31-35 mm
34-42 mm
38-49 mm
42-56 mm
46-64 mm





Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1231

Blind width:	min. 0.40 m + 2 x difference in width max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.60 m
Difference in width:	max. 0.15 m each side
Operating side:	optional left or right
Operating height:	standard dimension = blind height x 0.75 (measured from the topmost edge of the track)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze

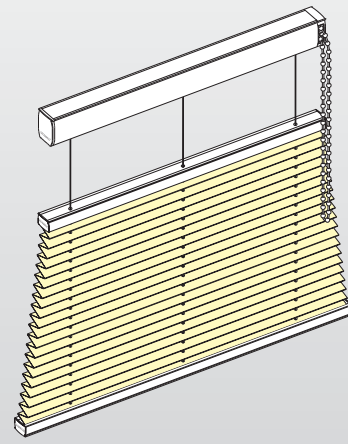

Free-hanging blind with chain operation and a two-sided sloped hanging (up to 0.15 m each side)

TYPE P1231

Chain
Drive




Measuring and Pricing

Blind width = order width
Blind height = order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P1231


Order dimensions: W, H, W₂

Note: please attach sketch

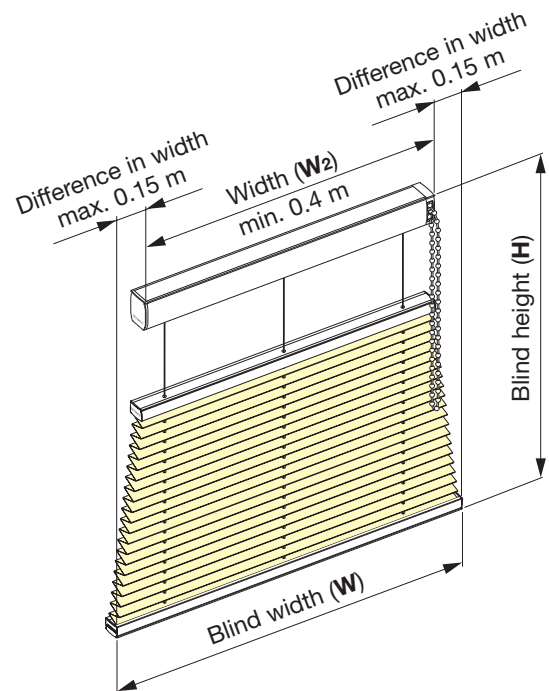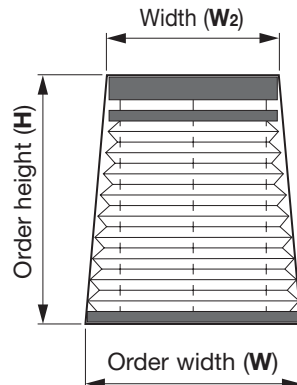


Blind height H

0.50 m
1.00 m
1.50 m
2.00 m
2.60 m





Stack height SH

31-35 mm
34-42 mm
38-49 mm
42-56 mm
46-64 mm





Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1241

Blind width:	min. 0.50 m max. dependent on W₂
Width W₂:	max. 2.00 m up to 60° (dependent on the fabric) max. 2.20 m up to 30° (dependent on the fabric)
Blind height:	max. 1.70 m (see picture on page 97)
Blind angle:	5°-60°
Operating side:	optional left or right
Operating height:	standard dimension = blind height x 0.75 (measured from the topmost edge of the track)
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze

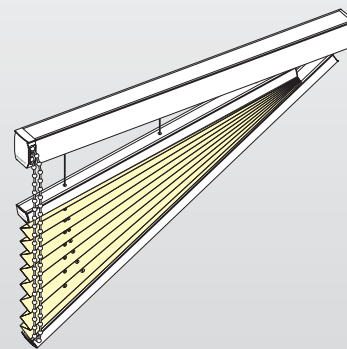

Tensioned triangular blind with chain operation

TYPE P1241




Measuring and Pricing

Blind width = **order width**
Blind height = **order height**

Pricing: width (W) x height (H) = list price
+ additional charge for type P1241


Order dimensions: W, HL or HR, W₂, (Angle)

Note: please attach sketch

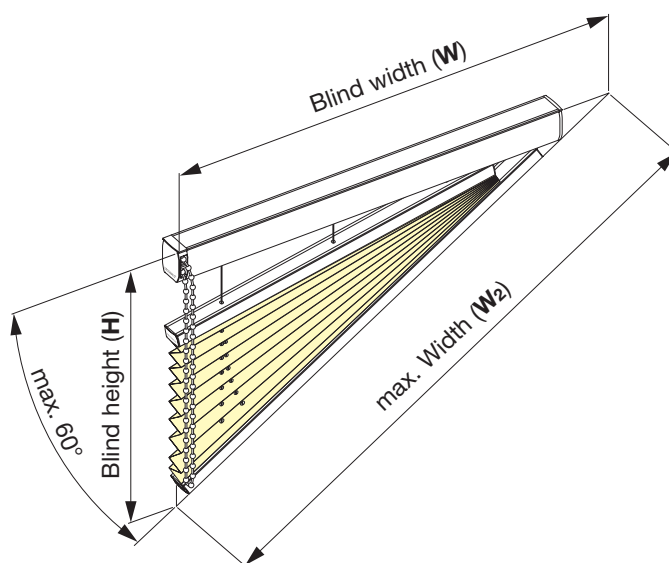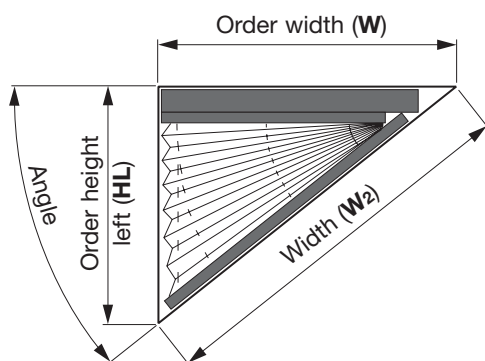


Blind height H

0.50 m
1.00 m
1.50 m
2.00 m





Stack height SH

31-35 mm
34-42 mm
38-49 mm
42-56 mm





Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1300

Blind width:	min. 0.70 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.60 m
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

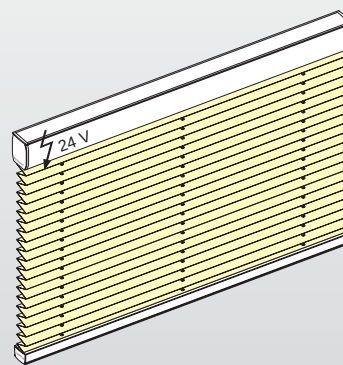

Free-hanging blind with
motor operation



TYPE P1300

Measuring and Pricing

Blind width	=	order width
Blind height	=	order height


Pricing: width (W) x height (H) = list price
+ additional charge for type P1300

Order dimensions: W, H

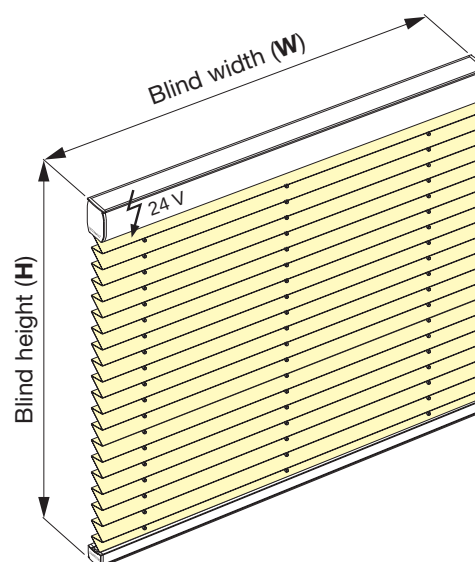


Blind height H

0.50 m
1.00 m
1.50 m
2.00 m
2.60 m




Stack height SH

52-56 mm
56-63 mm
59-70 mm
63-77 mm
67-85 mm




Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1305

Blind width:	min. 0.70 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.60 m
Angle of inclination:	max. 15°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)
Option:	tension profile (see page 9)

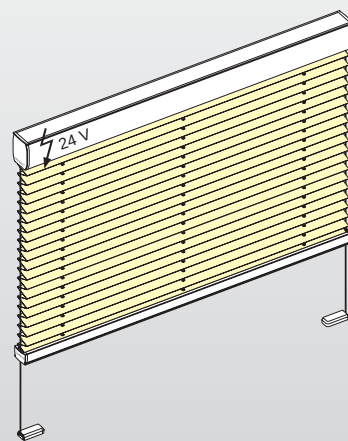

Free-hanging blind with motor operation and cord guiding

TYPE P1305



E-motor

Measuring and Pricing

Blind width = order width
Blind height = order height


Pricing: width (W) x height (H) = list price
+ additional charge for type P1305

Order dimensions: W, H

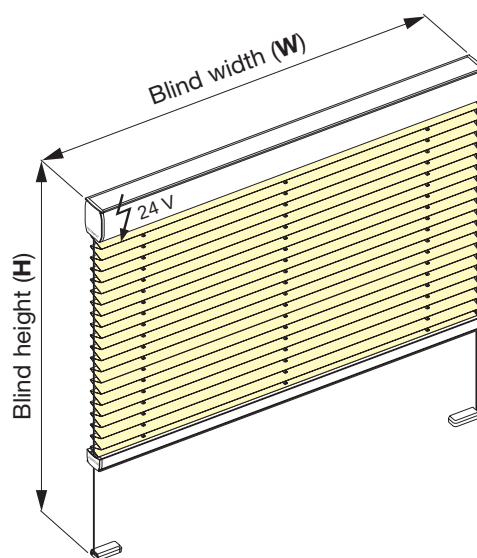


Blind height H

0.50 m
1.00 m
1.50 m
2.00 m
2.60 m




Stack height SH (a)

52-56 mm
56-63 mm
59-70 mm
63-77 mm
67-85 mm




Stack height SH (b)

56-60 mm
60-67 mm
63-74 mm
67-81 mm
71-89 mm

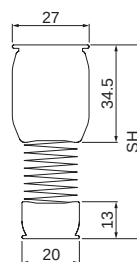


SH (a)
Standard

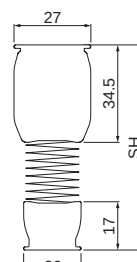


SH (b)
Optional
with tension profile

Accessories


Ceiling fixing
with
ceiling clip



Wall fixing
with
face fix bracket




Wall fixing
with
tension cord angle



Type P1310

Blind width:	min. 0.75 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.00 m
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

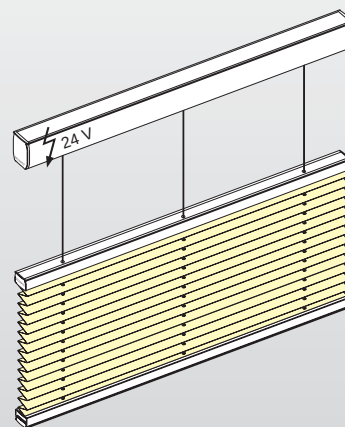

Free-hanging blind with motor operation and variable hanging



TYPE P1310

Measuring and Pricing

Blind width	=	order width
Blind height	=	order height


Pricing: width (W) x height (H) = list price
+ additional charge for type P1310

Order dimensions: W, H

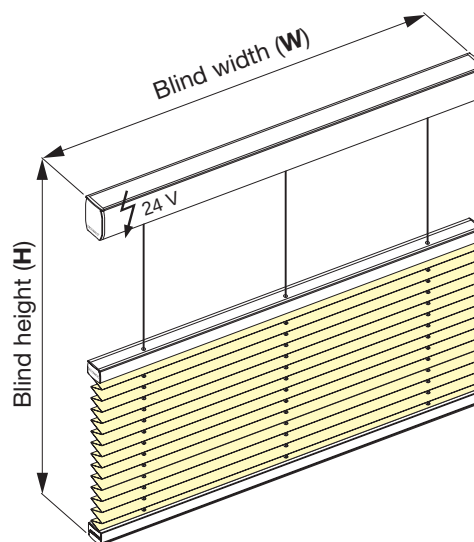



Blind height H

0.50 m
1.00 m
1.50 m
2.00 m



Stack height SH

65-69 mm
69-76 mm
72-83 mm
76-90 mm




Note:


For functional reasons, the bottom profile of the blind must have a clearance of at least 5-10 mm (e. g. from the window sill).

Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1315

Blind width:	min. 0.75 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.00 m
Angle of inclination:	max. 15°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

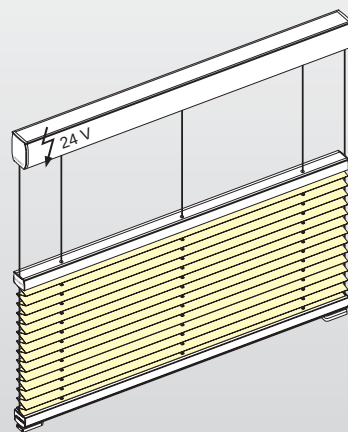

Free-hanging blind with motor operation,
variable hanging and cord guiding

TYPE P1315



E-motor

Measuring and Pricing

Blind width	=	order width
Blind height	=	order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P1315

Order dimensions: W, H

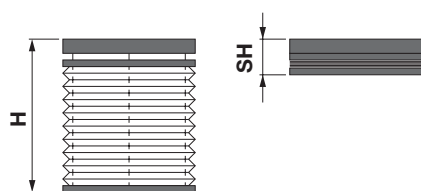
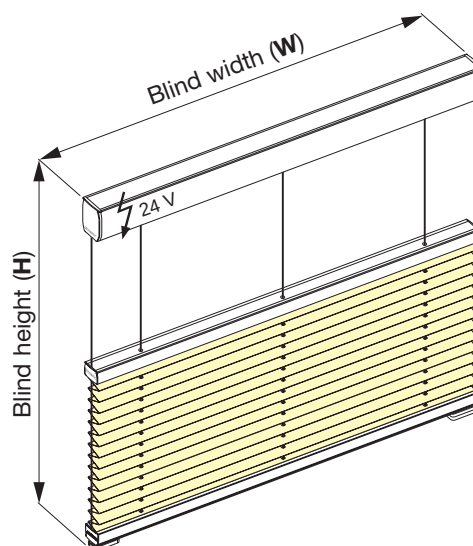


Blind height H

0.50 m
1.00 m
1.50 m
2.00 m

Stack height SH

65-69 mm
69-76 mm
72-83 mm
76-90 mm




Note:


For functional reasons, the bottom profile of the blind must have a clearance of at least 5-10 mm (for securing the tensioning cord).

Accessories


Ceiling fixing
with
ceiling clip



Wall fixing
with
face fix bracket




Wall fixing
with
tension cord angle



Type P1320

Blind width:	min. 0.75 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.00 m
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Hanging:	heavy hanging always on bottom
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

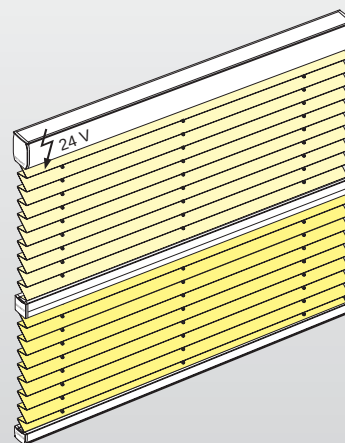

Free-hanging blind with motor operation and two hangings



TYPE P1320

Measuring and Pricing

Blind width	=	order width
Blind height	=	order height


Pricing: width (W) x height (H)
= list price of the upper hanging
+ list price of the bottom hanging
+ additional charge for type P1320

Order dimensions: W, H

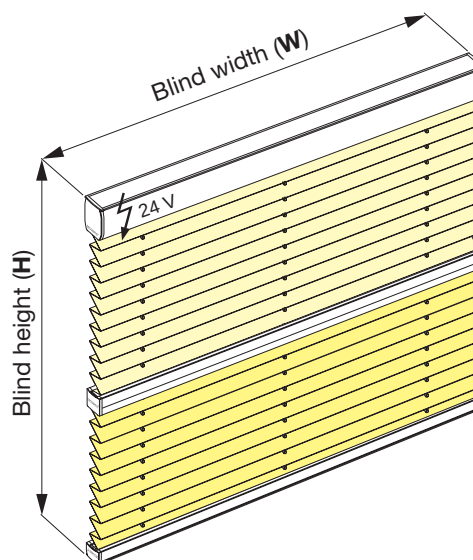



Blind height H

0.50 m
1.00 m
1.50 m
2.00 m



Stack height SH

71-75 mm
74-82 mm
78-89 mm
81-95 mm




Note:


For functional reasons, the bottom profile of the blind must have a clearance of at least 5-10 mm (e. g. from the window sill).

Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1325

Blind width:	min. 0.75 m max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.00 m
Angle of inclination:	max. 15°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Hanging:	heavy hanging always on bottom
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

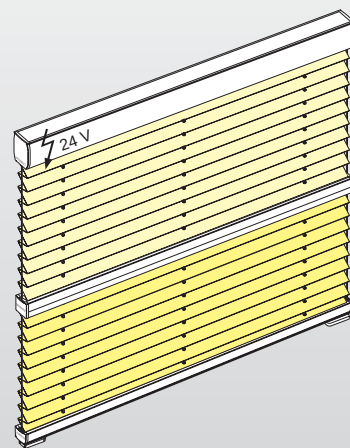

Free-hanging blind with motor operation, two hangings and cord guiding

TYPE P1325



E-motor

Measuring and Pricing


Blind width = order width
Blind height = order height

Pricing: width (W) x height (H)
= list price of the upper hanging
+ list price of the bottom hanging
+ additional charge for type P1325



Order dimensions: W, H

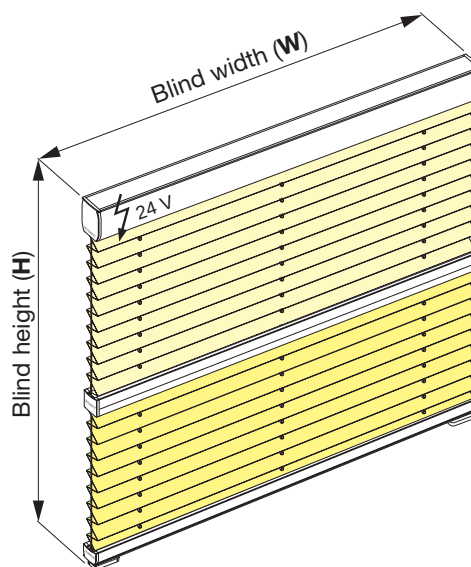

Blind height H
0.50 m
1.00 m
1.50 m
2.00 m



Stack height SH
71-75 mm
74-82 mm
78-89 mm
81-95 mm




Note:


For functional reasons, the bottom profile of the blind must have a clearance of at least 5-10 mm (for securing the tensioning cord).

Accessories


Ceiling fixing
with
ceiling clip



Wall fixing
with
face fix bracket




Wall fixing
with
tension cord angle



Type P1330

Blind width:	min. 0.70 m + difference in width max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.60 m
Difference in width:	max. 0.15 m
Hanging slope:	optional left or right
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

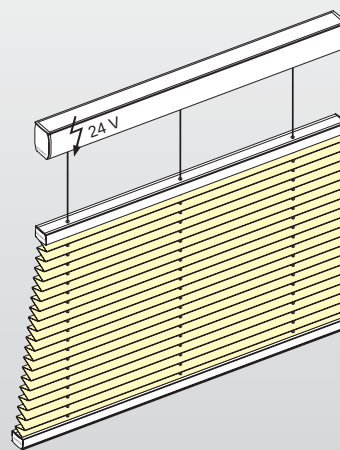

Free-hanging blind with motor operation and one-sided sloped hanging (up to 0.15 m)

TYPE P1330




Measuring and Pricing

Blind width	=	order width
Blind height	=	order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P1330


Order dimensions: W, H, W₂

Note: please attach sketch

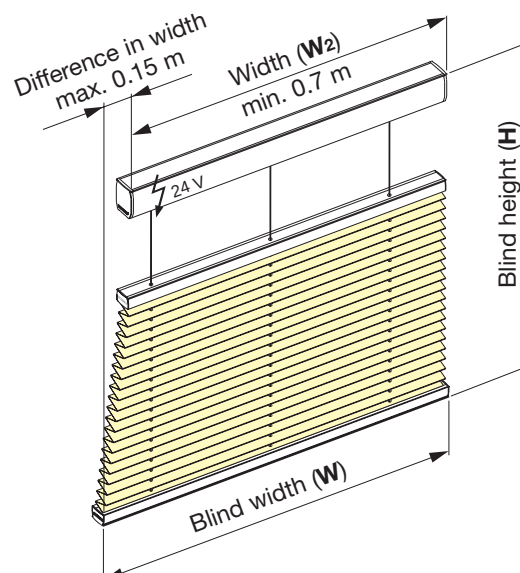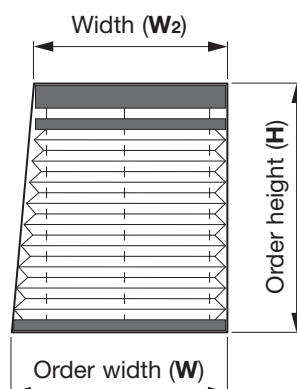


Blind height H

0.50 m
1.00 m
1.50 m
2.00 m
2.60 m





Stack height SH

31-35 mm
34-42 mm
38-49 mm
42-56 mm
46-64 mm





Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1331

Blind width:	min. 0.70 m + 2 x difference in width max. 2.20 m (dependent on the fabric)
Blind height:	max. 2.60 m
Difference in width:	max. 0.15 m each side
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

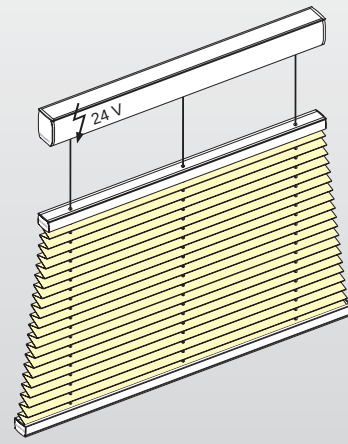

Free-hanging blind with motor operation and two-sided sloped hanging (up to 0.15 m each side)

TYPE P1331

E-motor




Measuring and Pricing

Blind width = order width
Blind height = order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P1331


Order dimensions: W, H, W₂

Note: please attach sketch

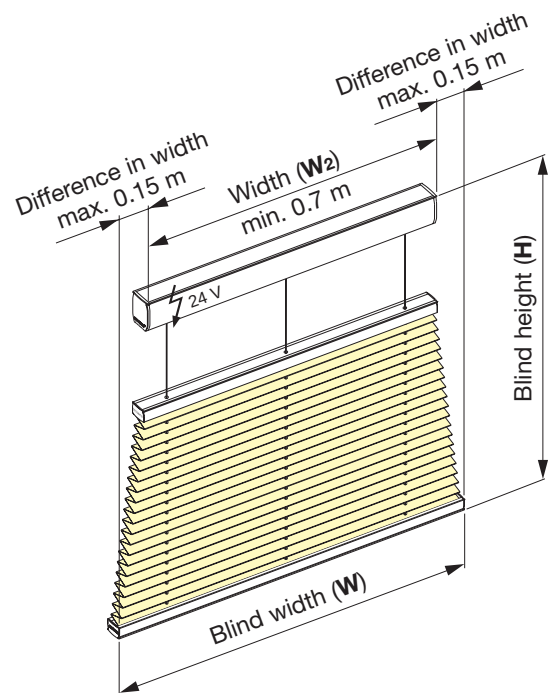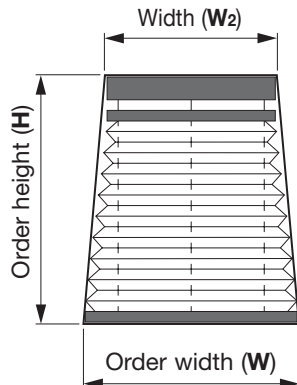


Blind height H

0.50 m
1.00 m
1.50 m
2.00 m
2.60 m





Stack height SH

31-35 mm
34-42 mm
38-49 mm
42-56 mm
46-64 mm





Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1340

Blind width:	min. 0.70 m max. dependent on W₂
Width W₂:	max. 2.00 m up to 60° (dependent on the fabric) max. 2.20 m up to 30° (dependent on the fabric)
Blind height:	max. 1.70 m (see picture on page 97)
Blind angle:	5°-60°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

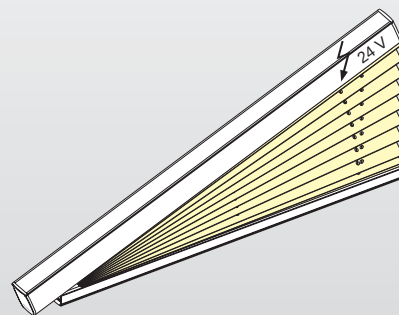

Free-hanging triangular blind with motor operation

TYPE P1340




Measuring and Pricing

Blind width = **order width**
Blind height = **order height**

Pricing: width (W) x height (H) = list price
+ additional charge for type P1340


Order dimensions: W, HL or HR, W₂, (Angle)

Note: please attach sketch

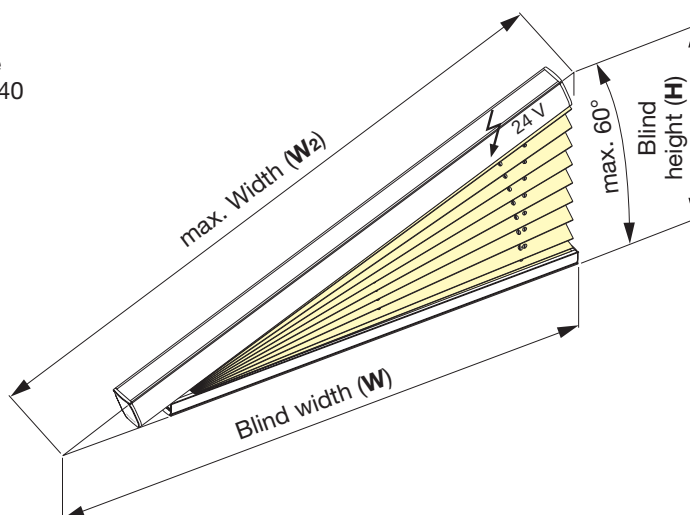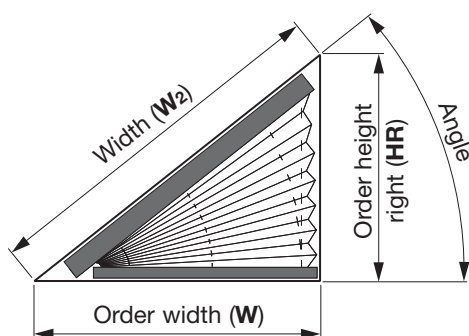


Blind height H

0.50 m
1.00 m
1.50 m
2.00 m




Stack height SH

52-56 mm
56-63 mm
59-70 mm
63-77 mm




Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1341

Blind width:	min. 0.70 m max. dependent on W₂
Width W₂:	max. 2.00 m up to 60° (dependent on the fabric) max. 2.20 m up to 30° (dependent on the fabric)
Blind height:	max. 1.70 m (see picture on Page 89)
Blind angle:	5°-60°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

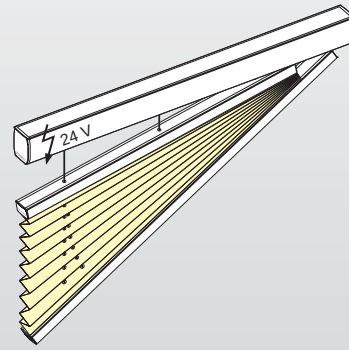

Tensioned triangular blind with motor operation

TYPE P1341

E-motor




Measuring and Pricing

Blind width = order width
Blind height = order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P1341


Order dimensions: W, HL or HR, W₂, (Angle)

Note: please attach sketch

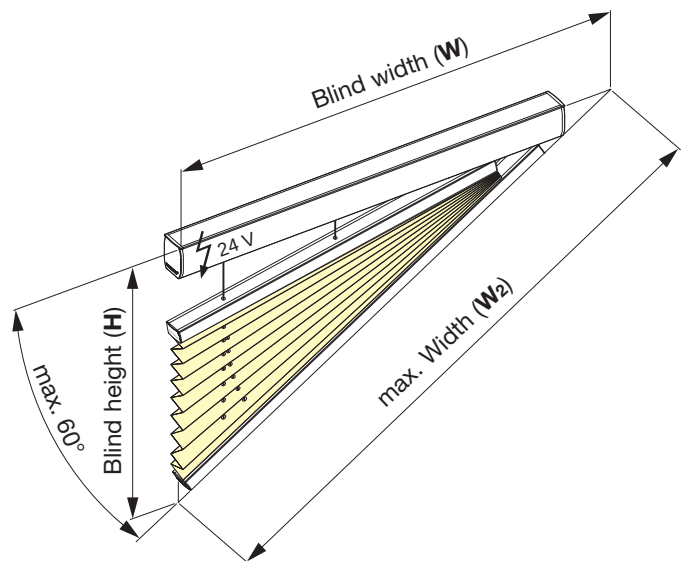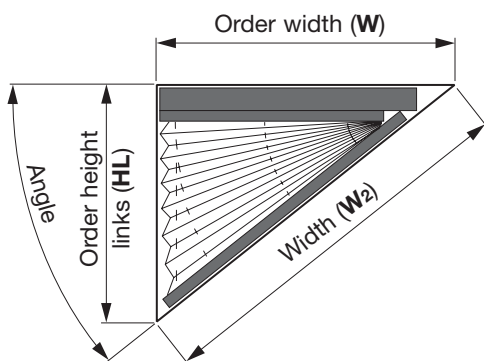


Blind height H

0.50 m
1.00 m
1.50 m
2.00 m





Stack height SH

31-35 mm
34-42 mm
38-49 mm
42-56 mm





Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1400

Blind width:	min. 0.20 m max. 1.00 m (blind height max. 2.20 m) max. 1.50 m (blind height max. 1.50 m)
Blind height:	max. 2.20 m
Angle of inclination:	max. 15°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m
Option:	tension profile for blind width up to 0.70 m (see page 9)

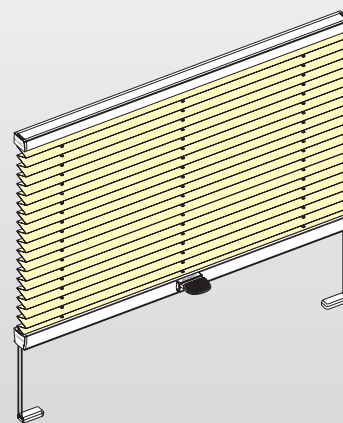

Tensioned blind with handle and tension cord fixing



TYPE P1400

Measuring and Pricing

Blind width = order width
Blind height = order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P1400

Order dimensions: W, H

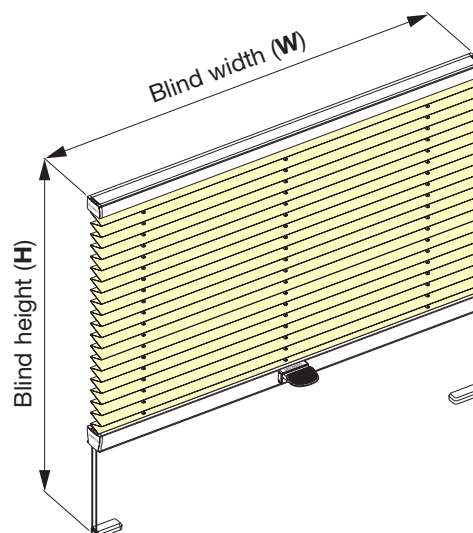

Blind height H

0.50 m
1.00 m
1.50 m
2.00 m
2.20 m




Stack height SH (a)

31-35 mm
34-42 mm
38-49 mm
42-56 mm
43-59 mm




Stack height SH (b)

35-39 mm
38-46 mm
42-53 mm
46-60 mm
47-63 mm




SH (a)
Standard
up to W = 0.70 m




SH (b)
Standard
from W = 0.70 m

Accessories


Ceiling fixing
with
ceiling clip



Wall fixing
with
face fix bracket




Wall fixing
with
tension cord angle



Type P1402

Blind width:	min. 0.20 m max. 1.00 m (blind height max. 2.20 m) max. 1.50 m (blind height max. 1.50 m)
Blind height:	max. 2.20 m
Angle of inclination:	max. 15°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m

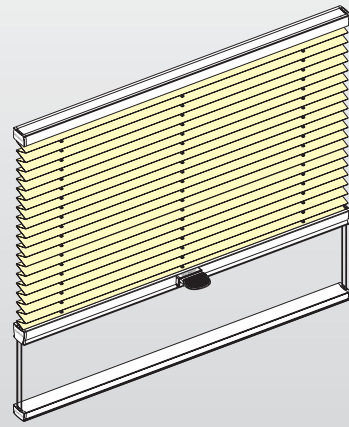

Tensioned blind with handle
and bottom track

TYPE P1402



Handle

Measuring and Pricing

Blind width	=	order width
Blind height	=	order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P1402

Order dimensions: W, H

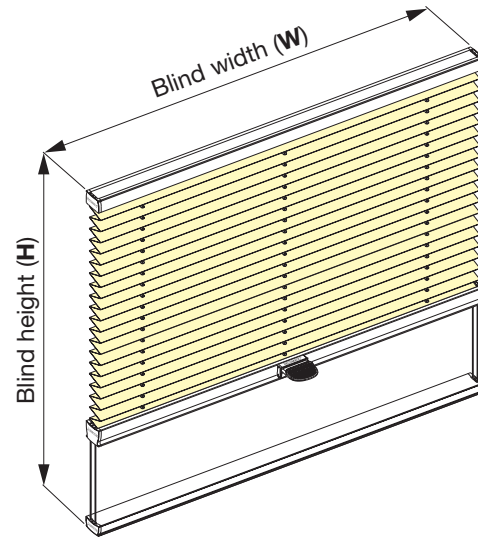

Blind height H

0.50 m
1.00 m
1.50 m
2.00 m
2.20 m




Stack height SH (a)

31-35 mm
34-42 mm
38-49 mm
42-56 mm
43-59 mm




Stack height SH (b)

35-39 mm
38-46 mm
42-53 mm
46-60 mm
47-63 mm




SH (a)
Standard
up to W = 0.70 m




SH (b)
Standard
from W = 0.70 m

Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1410

Blind width:	min. 0.20 m max. 1.00 m (blind height max. 2.20 m) max. 1.50 m (blind height max. 1.50 m)
Blind height:	max. 2.20 m
Angle of inclination:	max. 15°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m
Option:	tension profile for blind width up to 0.70 m (see page 9)

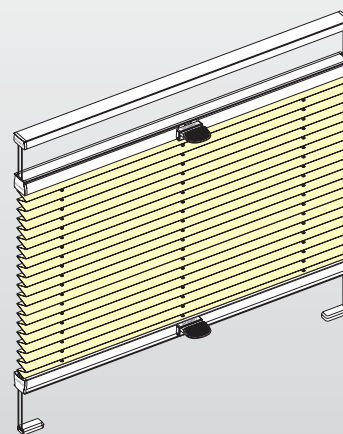

Tensioned blind with handle, variable hanging and tension cord fixing at the bottom and with top track



TYPE P1410

Measuring and Pricing

Blind width = order width
Blind height = order height


Pricing: width (W) x height (H) = list price
+ additional charge for type P1410

Order dimensions: W, H

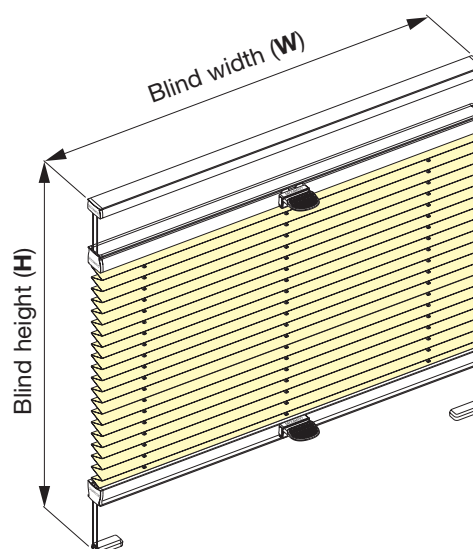


Blind height

H
0.50 m
1.00 m
1.50 m
2.00 m
2.20 m




Stack height

SH (a1)	SH (a2)
41-45 mm	37-41 mm
45-52 mm	41-48 mm
48-59 mm	44-55 mm
52-66 mm	48-62 mm
53-69 mm	49-65 mm



Stack height


SH (b1)	SH (b2)
49-53 mm	41-45 mm
53-60 mm	45-52 mm
56-67 mm	48-59 mm
60-74 mm	52-66 mm
61-89 mm	53-69 mm



SH (a1)	SH (a2)
10	13
13	13
20	13
13	19

SH (a1) and SH (a2)

Standard up to W = 0.70 m




SH (b1)	SH (b2)
10	17
17	17
20	17
17	19

SH (b1) and SH (b2)


Standard from W = 0.70 m

Accessories


Ceiling fixing with ceiling clip



Wall fixing with face fix bracket




Wall fixing with tension cord angle



Type P1415

Blind width:	min. 0.20 m max. 1.00 m (blind height max. 2.20 m) max. 1.50 m (blind height max. 1.50 m)
Blind height:	max. 2.20 m
Angle of inclination:	max. 15°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m
Option:	tension profile for blind width up to 0.70 m (see page 9)

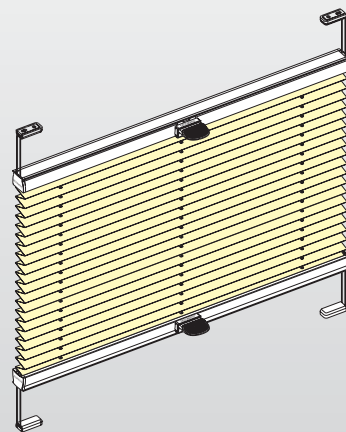

Tensioned blind with handle, variable hanging and tension cord fixing at the top and at the bottom

TYPE P1415



Handle

Measuring and Pricing

Blind width	=	order width
Blind height	=	order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P1415

Order dimensions: W, H

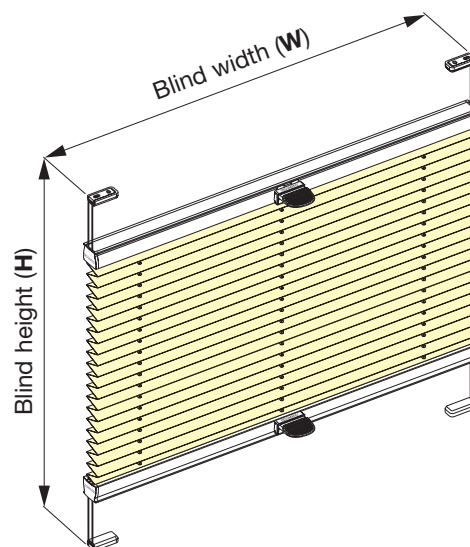

Blind height H

0.50 m
1.00 m
1.50 m
2.00 m
2.20 m




Stack height SH (a)

37-41 mm
41-48 mm
44-55 mm
48-62 mm
49-65 mm




Stack height SH (b)

41-45 mm
45-52 mm
48-59 mm
52-66 mm
53-69 mm




SH (a)
Standard
up to W = 0.70 m



SH (b)
Standard
from W = 0.70 m

Accessories

Wall fixing
with
tension cord angle



Type P1450

Blind width:	min. 0.30 m max. dependent on W₂
Width W₂:	max. 2.00 m up to 60° (dependent on the fabric) max. 2.20 m up to 30° (dependent on the fabric)
Blind height:	max. 3.00 m (see picture on Page 97)
Blind angle:	5°-60°
Angle of inclination:	max. 15°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m
Option:	tension profile for blind width up to 0.70 m (see page 9)






Measuring and Pricing

Blind width = **order width**
Blind height = **order height**

Pricing: width (W) x height (H) = list price
+ additional charge for type P1450


Order dimensions: W, HL or HR, W₂, H₂, (Angle)

Note: please attach sketch

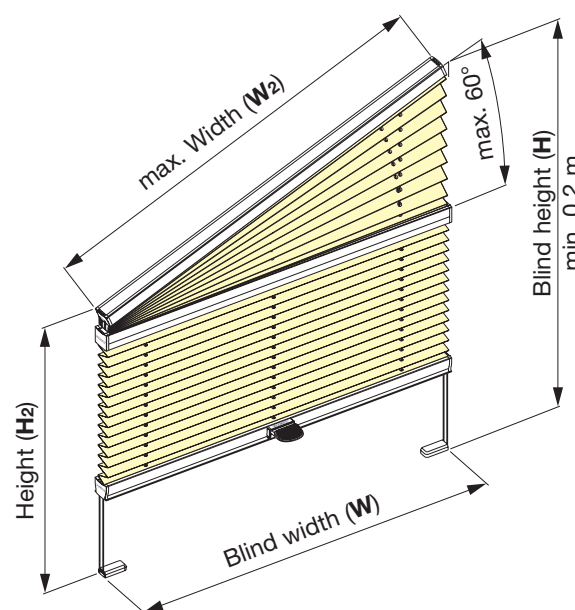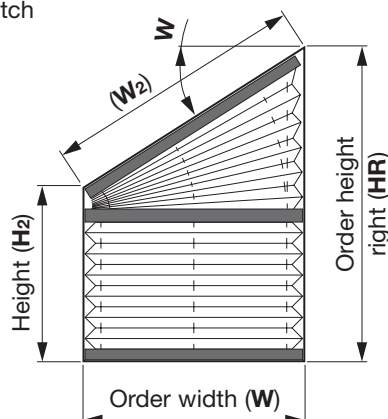


Height H₂

0.50 m
1.00 m
1.50 m
2.00 m
2.20 m




Stack height SH (a)

37-41 mm
41-48 mm
44-55 mm
48-62 mm
49-64 mm




Stack height SH (b)

41-55 mm
45-53 mm
48-59 mm
52-66 mm
52-68 mm




SH (a)
Standard
up to W = 0.70 m




SH (b)
Standard
from W = 0.70 m

Accessories


Ceiling fixing
with
ceiling clip



Wall fixing
with
face fix bracket




Wall fixing
with
tension cord angle



Type P1460

Blind width:	min. 0.20 m max. 1.20 m (blind height max. 2.00 m) max. 1.50 m (blind height max. 1.50 m)
Blind height:	max. 2.00 m
Angle of inclination:	max. 15°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m

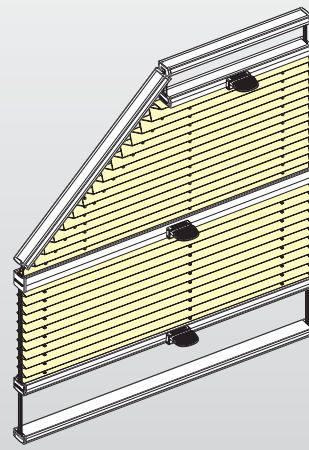

Tensioned 5-corner blind
with handle and lower track

TYPE P1450

Handle



Measuring and Pricing

Blind width	=	order width
Blind height	=	order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P1460

Order dimensions: W, HL or HR, W₂, H₂

Note: please attach sketch

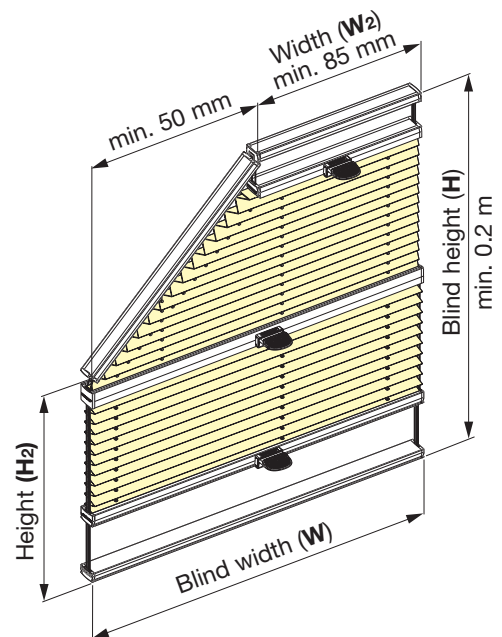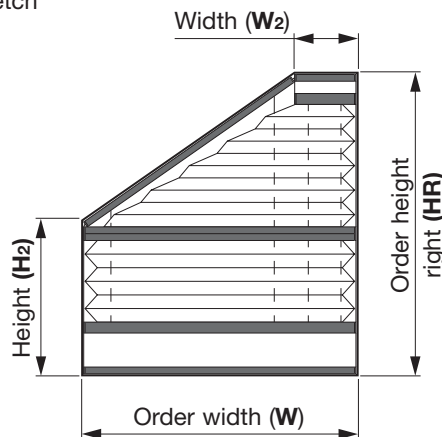


Blind height H	Stack height SH (a)	Stack height SH (b)	Stack height SH (c)
0.50 m	60-63 mm	64-67 mm	68-71 mm
1.00 m	63-70 mm	67-74 mm	71-78 mm
1.50 m	66-77 mm	70-81 mm	74-85 mm
2.00 m	70-84 mm	74-88 mm	78-92 mm


SH (a) Standard	SH (b) Standard	SH (c) Standard
W < 0.70 m	W > 0.70 m	W > 0.70 m
W ₂ < 0.70 m	W ₂ < 0.70 m	W ₂ > 0.70 m

Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P1461

Blind width:	min. 0.30 m max. 1.20 m (blind height max. 2.00 m) max. 1.50 m (blind height max. 1.50 m)
Blind height:	max. 2.00 m
Angle of inclination:	max. 15°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium. white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m

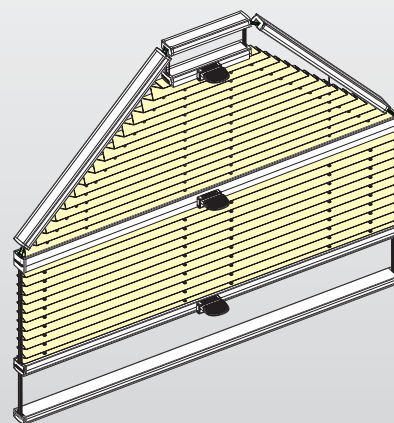

Tensioned 6-corner blind with handle and lower track

TYPE P1460







Measuring and Pricing

Blind width	=	order width
Blind height	=	order height


Pricing: width (W) x height (H) = list price
+ additional charge for type P1461

Order dimensions: W, H, W₂, H₂


Note: please attach sketch

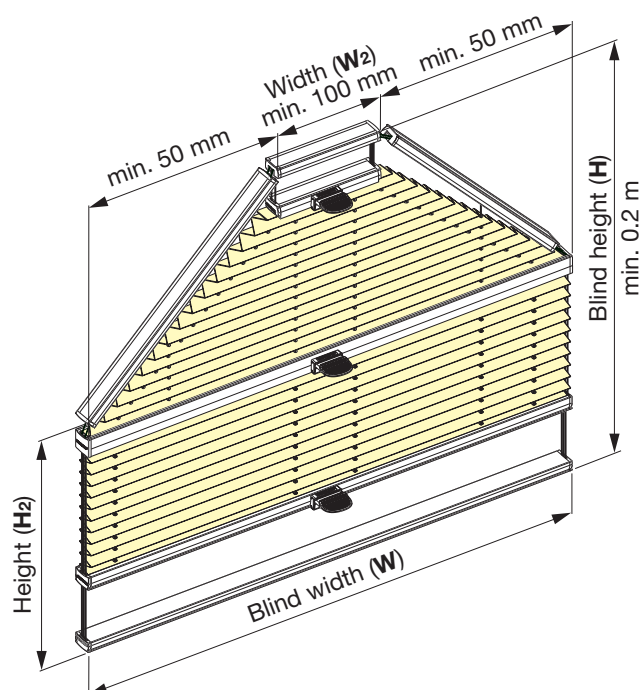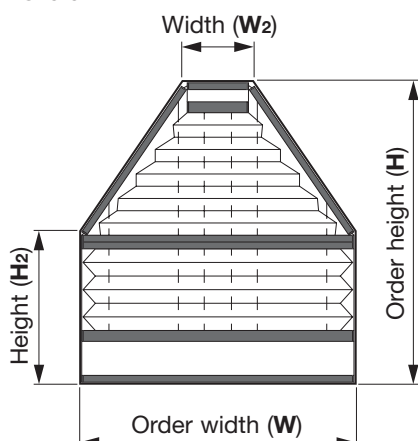


Blind height H	Stack height SH (a)	Stack height SH (b)	Stack height SH (c)
0.50 m	60-63 mm	64-67 mm	68-71 mm
1.00 m	63-70 mm	67-74 mm	71-78 mm
1.50 m	66-77 mm	70-81 mm	74-85 mm
2.00 m	70-84 mm	74-88 mm	78-92 mm



SH (a)
Standard
W < 0.70 m
W₂ < 0.70 m




SH (b)
Standard
W > 0.70 m
W₂ < 0.70 m




SH (c)
Standard
W > 0.70 m
W₂ > 0.70 m

Accessories

Ceiling fixing
with
ceiling clip



Wall fixing
with
face fix bracket




Type P1060

Blind width and blind height = identical

Blind width: min. 0.20 m
(radius) max. 1.00 m

Pattern of the hanging: optional facing inwards or outwards
 (standard: facing inwards)

Profile colour: optional aluminium, white, black
 or bronze



Fixed blind 90°
 (quarter circle)


TYPE P1060

Measuring and Pricing

Blind width = order width
(Blind height = blind width)

Pricing: width (W) x height (H) = list price


Order dimensions: W

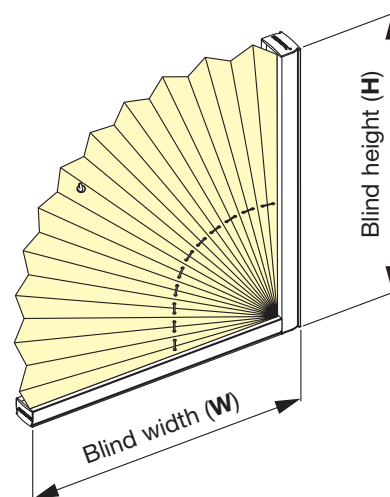


Blind width = Blind height

Accessories


Ceiling fixing
 with
 ceiling clip



Wall fixing
 with
 face fix bracket



Hook



Type P1065


Blind width = 2 x blind height

Blind width: min. 0.20 m
max. 1.50 m

Blind height: 1/2 blind width
(radius)

Pattern of the hanging: optional facing inwards or outwards
(standard: facing inwards)

Profile colour: optional aluminium, white, black
or bronze

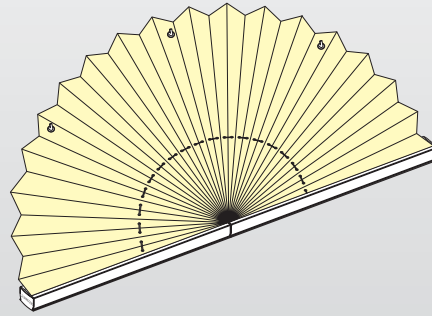


Fixed blind 180°
(semicircle)

Measuring and Pricing

Blind width = **order width**
(Blind height = 1/2 blind width)

Pricing: width (W) x height (H) = list price


Order dimensions: W

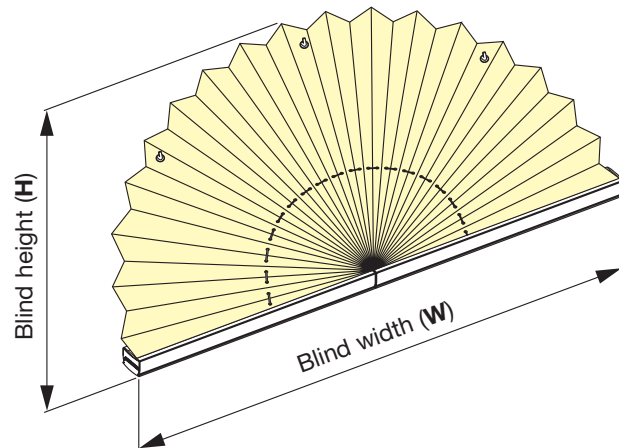


Blind width = 2 x blind height

Accessories


Ceiling fixing
with
ceiling clip



Wall fixing
with
face fix bracket





Hook



Roof Windows

Tensioned blinds with handle operation.
For roof windows with a max. inclination of up to 60°.

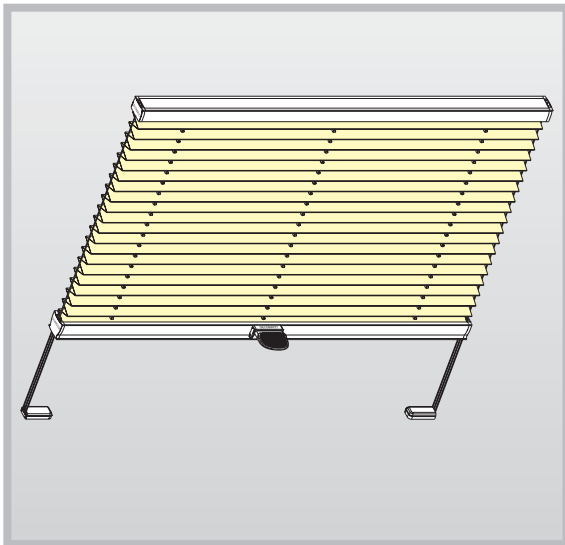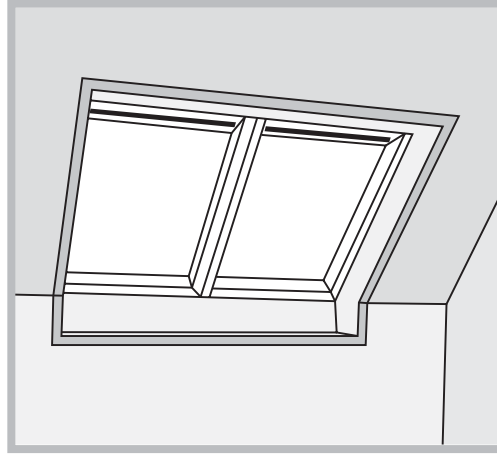


Handle operation

Tensioned blind with handle operation up to a max. inclination of 60°.

Blind widths: 0.20-1.50 m


Blind heights: max. 2.20 m

Standard profile 13 mm



Placed upon tension cord fixing.
Light gap = 6 mm.

Tension profile 17 mm

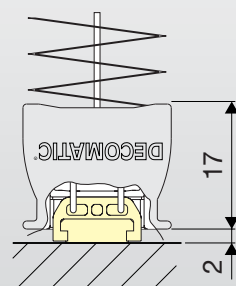


Covers the tension cord fixing and prevents deflection of the tensioned blinds.

The **standard profile** is used with blind widths up to 0.70 m.


The **tension profile** is used with blind widths of 0.70 m upwards.

Optionally, the **tension profile** can also be used with smaller blind widths.

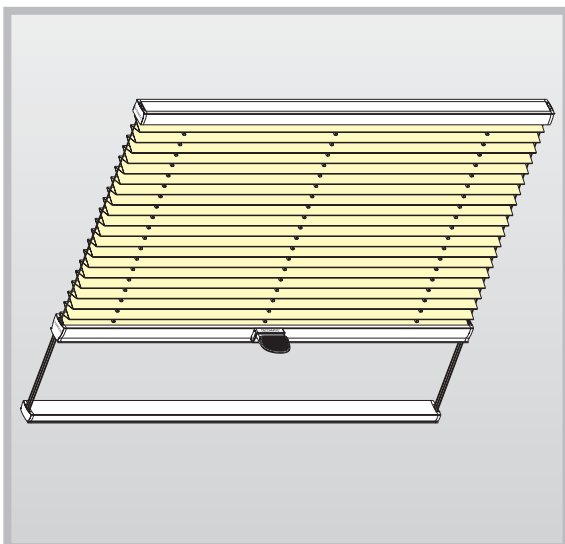

Tensioning with the bottom track

The tension cord fixing is replaced by a third track.

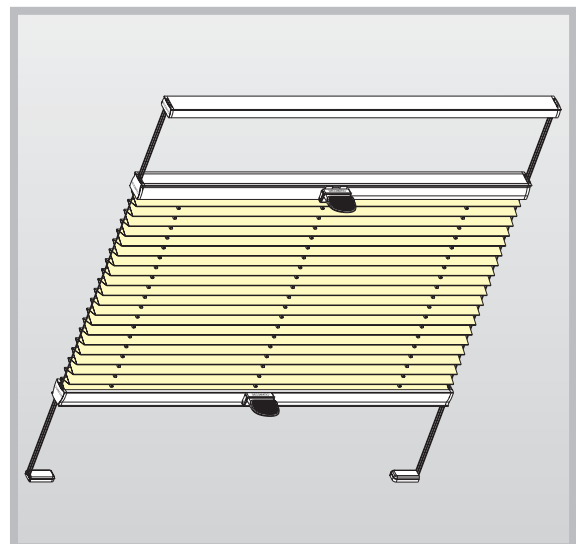


Variable hanging

The hanging can be opened additionally from above by a second handle.

Type P2400

Blind width:	min. 0.20 m max. 1.00 m (blind height max. 2.20 m) max. 1.50 m (blind height max. 1.50 m)
Blind height:	max. 2.20 m
Angle of inclination:	max. 60°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m
Option:	tension profile for blind width up to 0.70 m (see page 51) side profile 90°, 96° or 105° (see page 92)

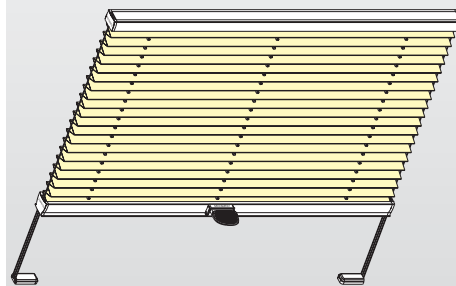

Tensioned blind with handle,
tension cord fixing and
cord guiding



TYPE P2400

Measuring and Pricing

Blind width = order width
Blind height = order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P2400

Order dimensions: W, H

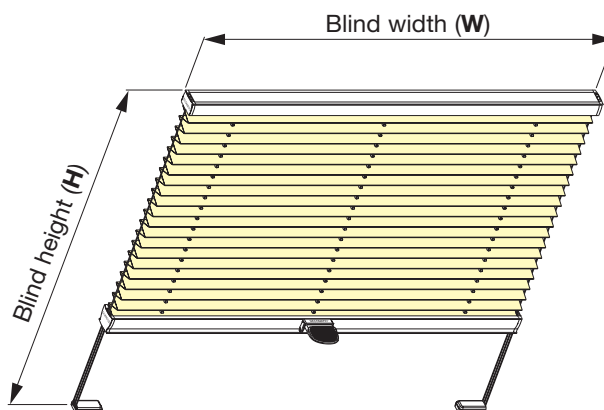

Blind height H

0.50 m
1.00 m
1.50 m
2.00 m
2.20 m




Stack height SH (a)

31-35 mm
34-42 mm
38-49 mm
42-56 mm
43-59 mm




Stack height SH (b)

35-39 mm
38-46 mm
42-53 mm
46-60 mm
47-63 mm




SH (a)
Standard
up to W = 0.70 m




SH (b)
Standard
from W = 0.70 m

Accessories


Ceiling fixing
with
ceiling clip



Wall fixing
with
face fix bracket




Wall fixing
with
tension cord angle



Type P2402

Blind width:	min. 0.20 m max. 1.00 m (blind height max. 2.20 m) max. 1.50 m (blind height max. 1.50 m)
Blind height:	max. 2.20 m
Angle of inclination:	max. 60°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m
Option:	side profile 90°, 96° or 105° (see page 92)

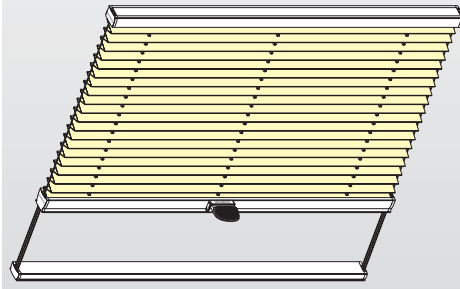

Tensioned blind with handle,
bottom track and cord guiding



TYPE P2402

Measuring and Pricing

Blind width	=	order width
Blind height	=	order height

Pricing: width (W) x height (H) = list price
+ additional charge for type P2402

Order dimensions: W, H

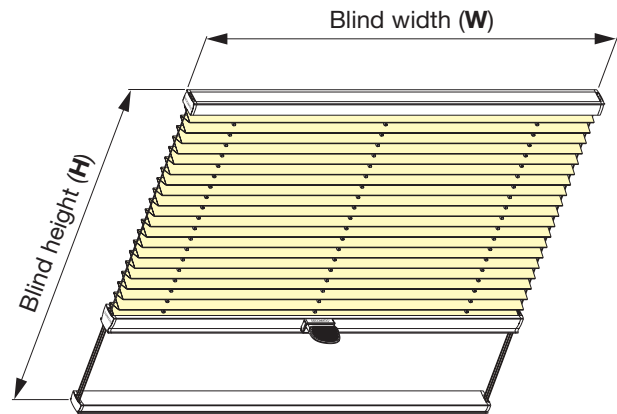

Blind height H

0.50 m
1.00 m
1.50 m
2.00 m
2.20 m




Stack height SH (a)

31-35 mm
34-42 mm
38-49 mm
42-56 mm
43-59 mm




Stack height SH (b)

35-39 mm
38-46 mm
42-53 mm
46-60 mm
47-63 mm




SH (a)
Standard
up to W = 0.70 m




SH (b)
Standard
from W = 0.70 m

Accessories

Ceiling fixing
with
ceiling clip




Wall fixing
with
face fix bracket



Type P2410

Blind width:	min. 0.20 m max. 1.00 m (blind height max. 2.20 m) max. 1.50 m (blind height max. 1.50 m)
Blind height:	max. 2.20 m
Angle of inclination:	max. 60°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m
Option:	tension profile for Blind width up to 0.70 m (see page 51) side profile 90°, 96° or 105° (see page 92)

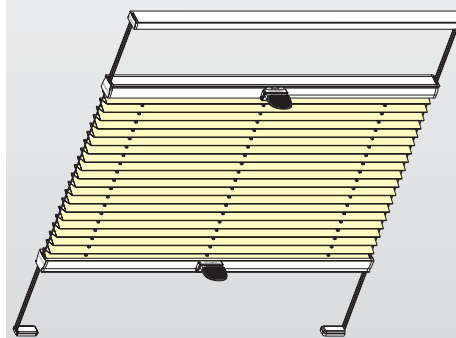

Tensioned blind with handle,
variable hanging and
cord guiding



TYPE P2410

Measuring and Pricing

Blind width = order width
Blind height = order height


Pricing: width (W) x height (H) = list price
+ additional charge for type P2410

Order dimensions: W, H

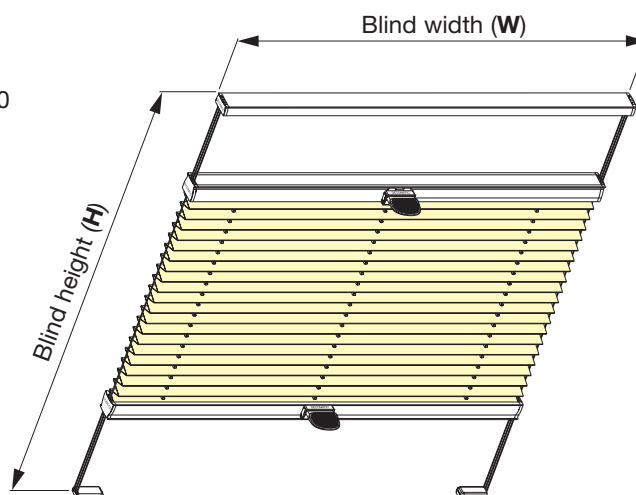


Blind height

H
0.50 m
1.00 m
1.50 m
2.00 m
2.20 m




Stack height

SH (a1)	SH (a2)
41-45 mm	37-41 mm
45-52 mm	41-48 mm
48-59 mm	44-55 mm
52-66 mm	48-62 mm
53-69 mm	49-65 mm




Stack height

SH (b1)	SH (b2)
49-53 mm	41-45 mm
53-60 mm	45-52 mm
56-67 mm	48-59 mm
60-74 mm	52-66 mm
61-89 mm	53-69 mm



SH (a1) and SH (a2)

Standard up to W = 0.70 m




SH (b1) and SH (b2)


Standard from W = 0.70 m

Accessories


Ceiling fixing
with
ceiling clip



Wall fixing
with
face fix bracket




Wall fixing
with
tension cord angle



Ceiling Windows and Conservatory

Tensioned blinds (steel wire tensioning) with several operation variants for ceiling windows and conservatory, angle of inclination up to max. 90° (horizontal).

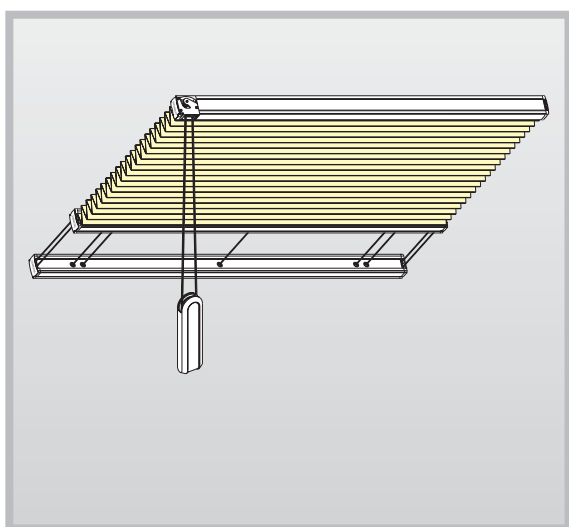


Cord operation

Simple cord operation (cord lock without clamping).

Blind widths: 0.30-1.50 m

Blind lengths: max. 4.00 m

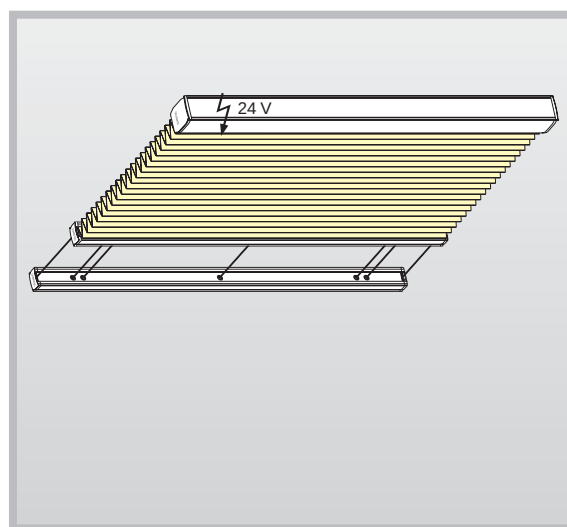


Motor operation

Opening and closing with a 24 V drive motor.


Blind widths: 0.80-1.50 m

Blind lengths: max. 4.00 m

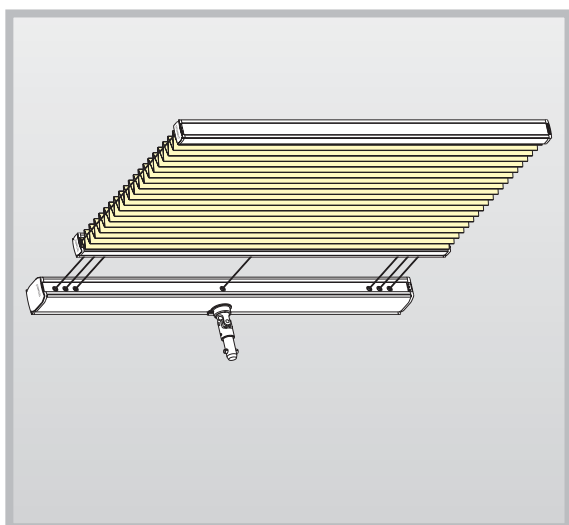

Operation at the bottom – hanging on the top

The operation side and the hanging side respectively can be chosen.


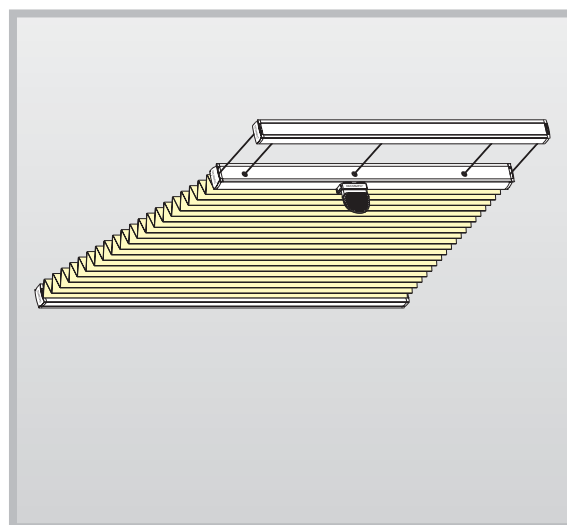


Blind with a sloped hanging

Up to a difference in width of 0.15 m or up to a difference in width of 0.50 m.

Blind widths: 0.30-1.50 m

Blind lengths: max. 4.00 m

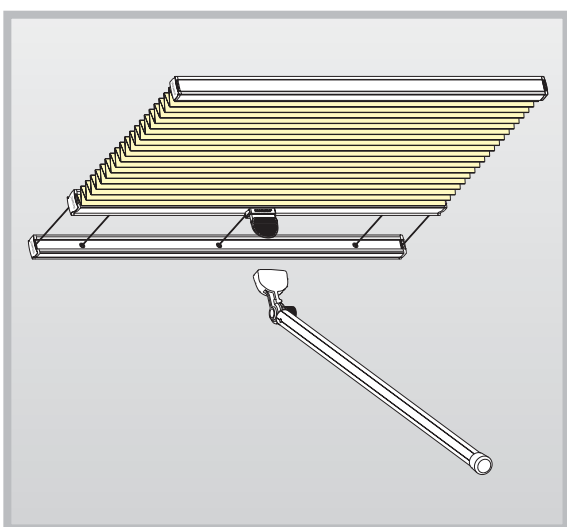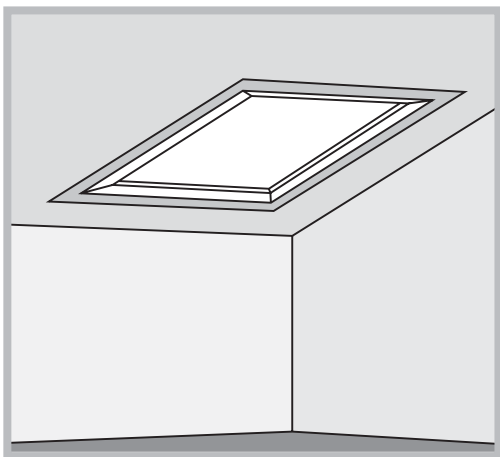


Handle operation

Tensioned blind with handle or additional control rod.

Blind widths: 0.30-1.50 m

Blind lengths: max. 4.00 m

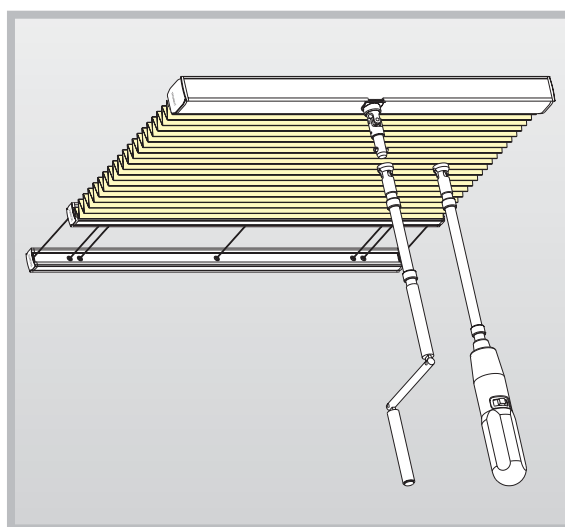


Crank operation

Operation with crank handle or motorised handle.

Blind widths: 0.75-1.50 m

Blind lengths: max. 4.00 m

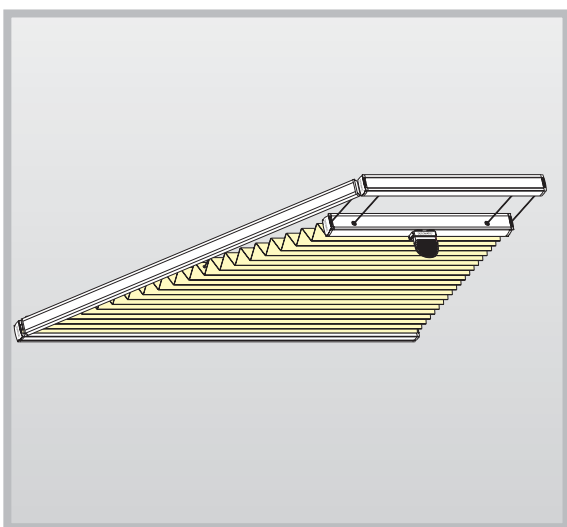


Trapezoidal blind

Sloped on one side (max. difference in width 1.20 m), sloped on both sides (max. difference in width per side 0.70 m).

Blind widths: 0.30-1.50 m

Blind lengths: max. 2.00 cm

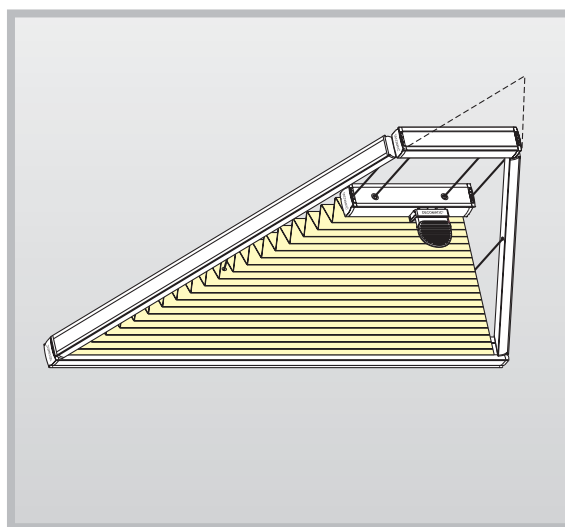

Triangular blind


One sloped side (rectangular triangle) or two sloped sides (isosceles triangle). Up to a vertex of 70 mm minimum.

Blind widths: 0.30-1.50 m

Blind lengths: max. 2.00 cm

Type P3100

Blind width:	min. 0.30 m max. 1.50 m (dependent on the fabric)
Blind length:	max. 4.00 m
Angle of inclination:	45°-90°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	optional left or right
Operation height:	as desired

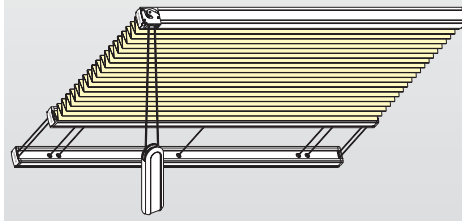

Tensioned blind with cord operation
and wire tensioning



TYPE P3100

Measuring and Pricing

Blind width = order width
Blind length = order length


Pricing: width (W) x length (L) = list price
+ additional charge for type P3100

Order dimensions: W, L

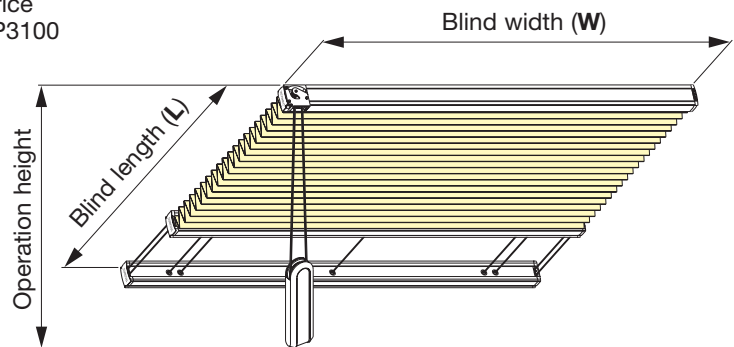


Blind length L

0.50 m
1.00 m
1.50 m
2.00 m
2.50 m
3.00 m
3.50 m
4.00 m




Stack height SH

31-35 mm
34-42 mm
38-49 mm
42-56 mm
45-62 mm
49-69 mm
52-76 mm
56-82 mm




Accessories

Ceiling fixing
with
ceiling clip



Type P3300

Blind width:	min. 0.80 m max. 1.50 m (dependent on the fabric)
Blind length:	max. 4.00 m
Angle of inclination:	45°-90°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

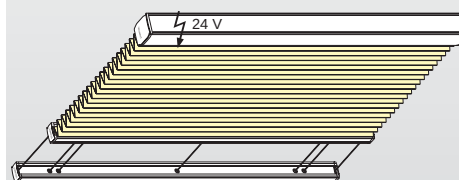

Tensioned blind with motor operation,
bottom track and wire tensioning


TYPE P3300



Measuring and Pricing


Blind width	=	order width
Blind length	=	order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3300

Order dimensions: W, L

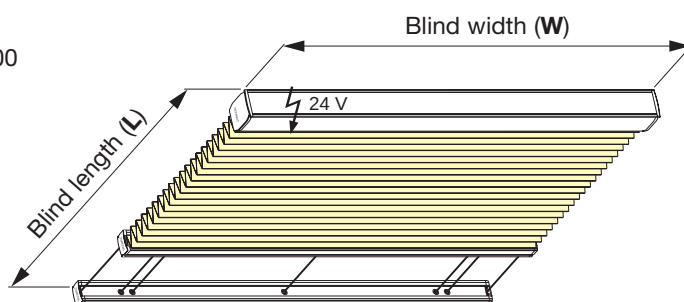


	
Blind length L	Stack height SH
1.00 m	56-63 mm
1.50 m	59-70 mm
2.00 m	63-77 mm
2.50 m	67-84 mm
3.00 m	70-91 mm
3.50 m	74-97 mm
4.00 m	77-104 mm




Accessories

Ceiling fixing
with
ceiling clip



Type P3302

Blind width:	min. 0.80 m max. 1.50 m (dependent on the fabric)
Blind length:	max. 4.00 m
Angle of inclination:	45°-90°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

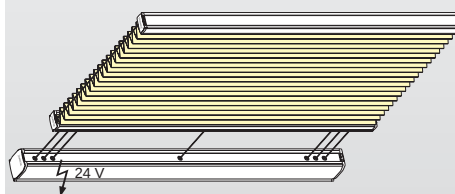

Tensioned blind with motor operation
in bottom track and wire tensioning



TYPE P3302

Measuring and Pricing

Blind width = order width
Blind length = order length


Pricing: width (W) x length (L) = list price
+ additional charge for type P3302

Order dimensions: W, L

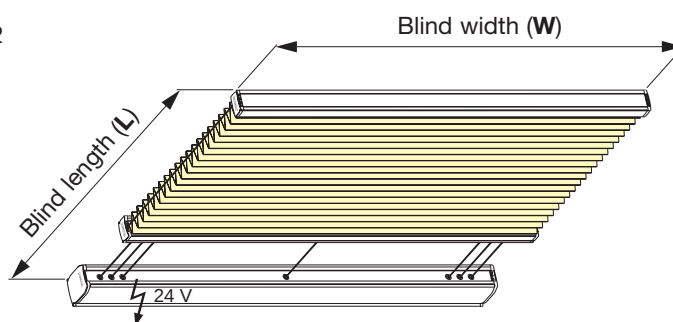


Blind length L

1.00 m
1.50 m
2.00 m
2.50 m
3.00 m
3.50 m
4.00 m





Stack height SH

34-42 mm
38-49 mm
42-56 mm
45-62 mm
49-69 mm
52-76 mm
56-82 mm




Accessories

Ceiling fixing
with
ceiling clip



Type P3330

Blind width:	min. 0.80 m (motor profile) max. 1.50 m (dependent on the fabric)
Blind length:	max. 4.00 m
Angle of inclination:	45°-90°
Difference in width:	max. 0.15 m
Hanging slope:	optional left or right
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

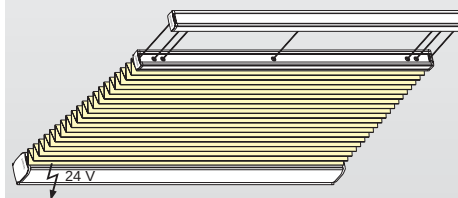

Tensioned blind with motor operation,
top track, wire tensioning and
one-sided sloped hanging
(up to 0.15 m)

TYPE P3330




Measuring and Pricing

Blind width = **order width**
Blind length = **order length**

Pricing: width (W) x length (L) = list price
+ additional charge for type P3330


Order dimensions: W, LR or LL, W₂

Note: please attach sketch

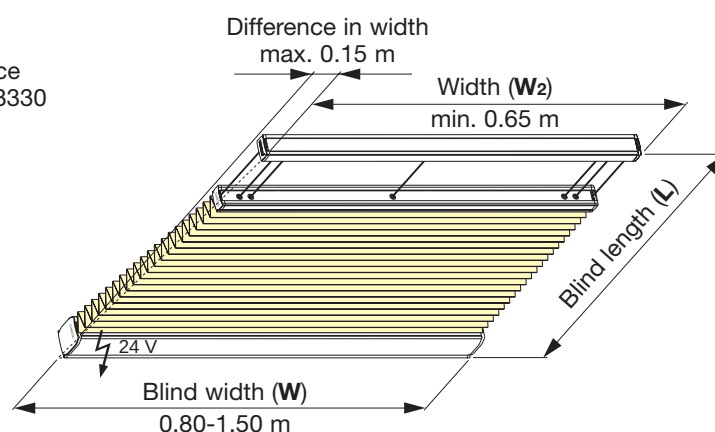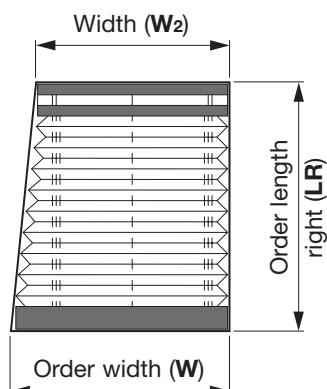


Blind length L

1.00 m
1.50 m
2.00 m
2.50 m
3.00 m
3.50 m
4.00 m





Stack height SH

56-63 mm
59-70 mm
63-77 mm
67-84 mm
70-91 mm
74-97 mm
77-104 mm




Accessories

Ceiling fixing
with
ceiling clip



Type P3331

Blind width:	min. 0.80 m (motor profile) max. 1.50 m (dependent on the fabric)
Blind length:	max. 4.00 m
Angle of inclination:	45°-90°
Difference in width:	max. 0.15 m each side
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

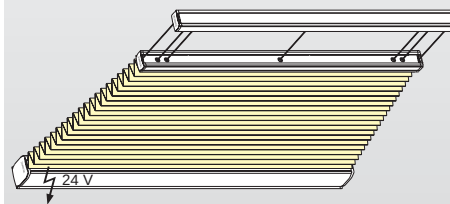

Tensioned blind with motor operation,
top track, wire tensioning and
two-sided sloped hanging
(up to 0.15 m each side)

TYPE P3331




Measuring and Pricing

Blind width = order width
Blind length = order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3331


Order dimensions: W, L, W₂

Note: please attach sketch

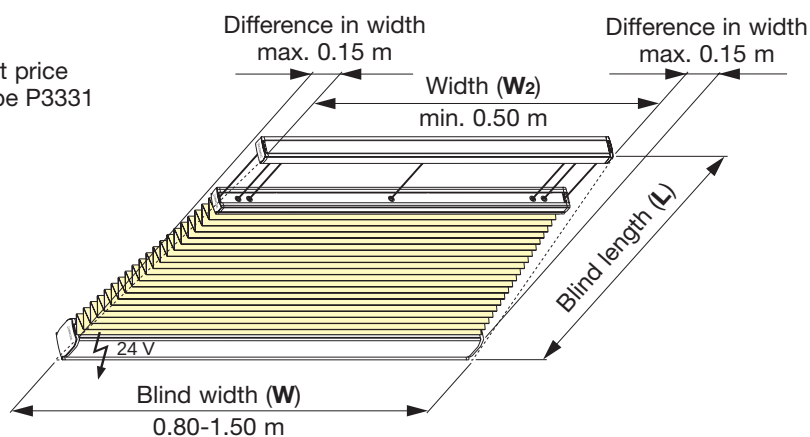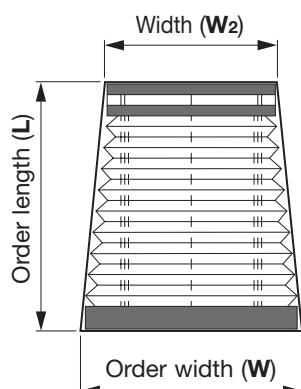


Blind length L

1.00 m
1.50 m
2.00 m
2.50 m
3.00 m
3.50 m
4.00 m





Stack height SH

56-63 mm
59-70 mm
63-77 mm
67-84 mm
70-91 mm
74-97 mm
77-104 mm




Accessories

Ceiling fixing
with
ceiling clip



Type P3332

Blind width:	min. 0.80 m (motor profile) max. 1.50 m (dependent on the fabric)
Blind length:	max. 2.50 m
Angle of inclination:	45°-90°
Difference in width:	max. 0.50 m
Hanging slope:	optional left or right
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

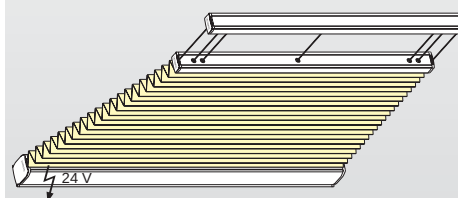

Tensioned blind with motor operation,
top track, wire tensioning and
one-sided sloped hanging
(up to 0.15 m)

TYPE P3332



Measuring and Pricing

Blind width = **order width**
Blind length = **order length**

Pricing: width (W) x length (L) = list price
+ additional charge for type P3332


Order dimensions: W, LR or LL, W₂

Note: please attach sketch

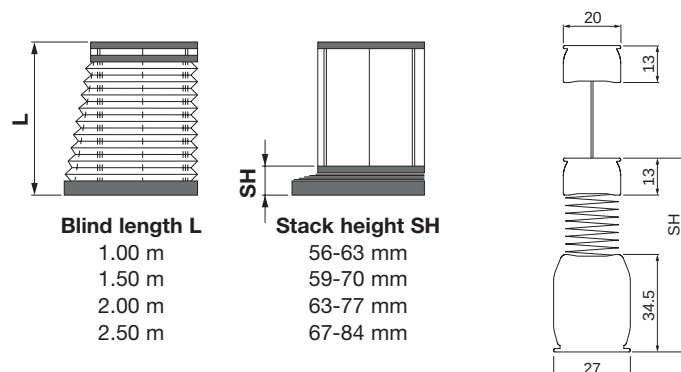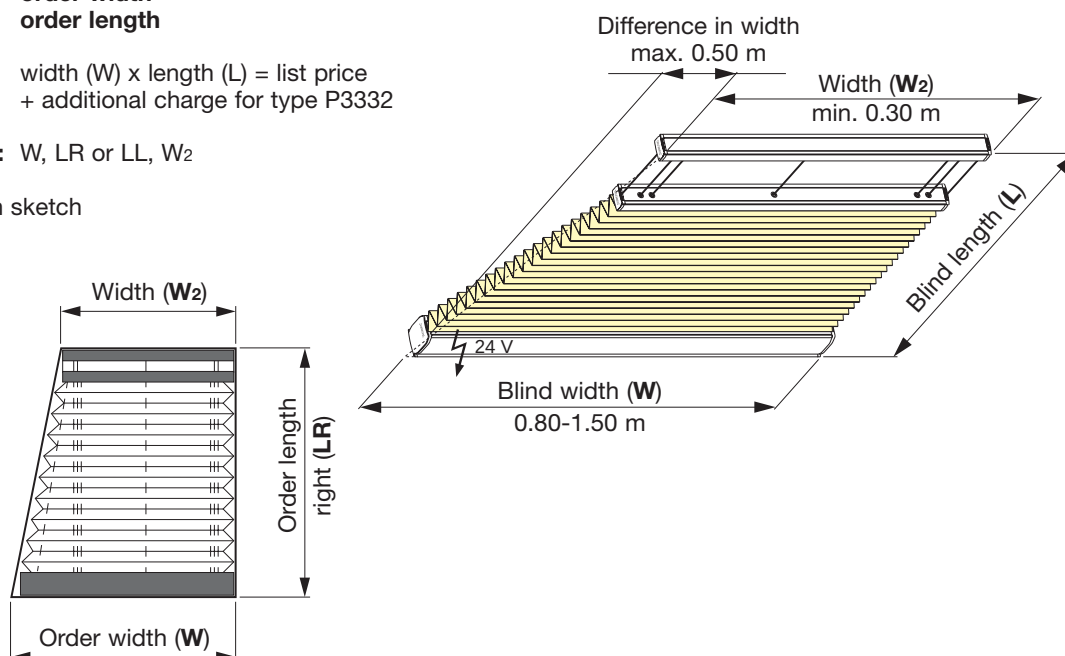


Accessories

Ceiling fixing
with
ceiling clip



Type P3333

Blind width:	min. 0.80 m (motor profile) max. 1.50 m (dependent on the fabric)
Blind length:	max. 2.50 m
Angle of inclination:	45°-90°
Difference in width:	max. 0.50 m each side
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

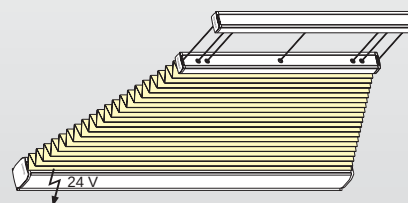

Tensioned blind with motor operation, top track, wire tensioning and two-sided sloped hanging (up to 0.50 m each side)

TYPE P3333




Measuring and Pricing

Blind width = order width
Blind length = order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3333


Order dimensions: W, L, W₂

Note: please attach sketch

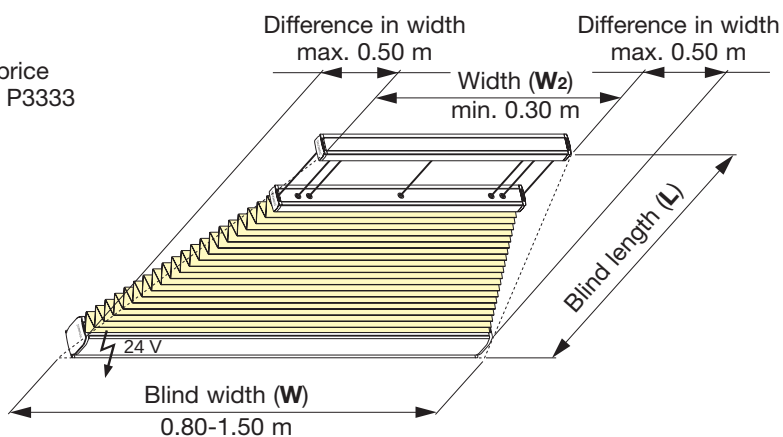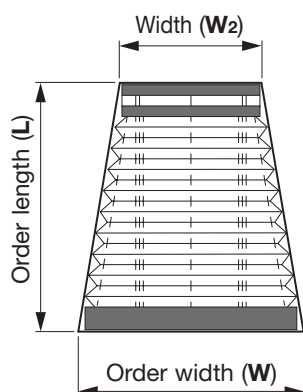


Blind length L

1.00 m
1.50 m
2.00 m
2.50 m




Stack height SH

56-63 mm
59-70 mm
63-77 mm
67-84 mm




Accessories

Ceiling fixing
with
ceiling clip

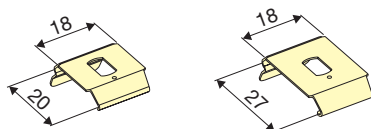

Type P3334

Blind width:	min. 0.80 m (motor profile) max. 1.50 m (dependent on the fabric)
Blind length:	max. 2.00 m
Angle of inclination:	45°-90°
Difference in width:	max. 1.20 m
Width (W₂):	min. 70 mm
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

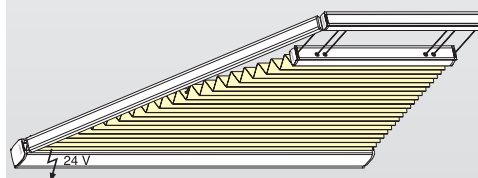

Tensioned blind with motor operation,
top track, wire tensioning and
one-sided sloped hanging (up to 1.20 m)

TYPE P3334




Measuring and Pricing

Blind width = order width
Blind length = order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3334

Order dimensions: W, LL or LR, W₂

Note: please attach sketch

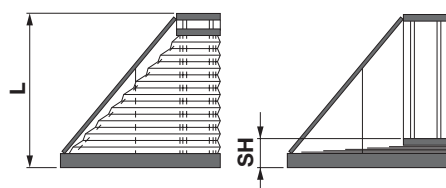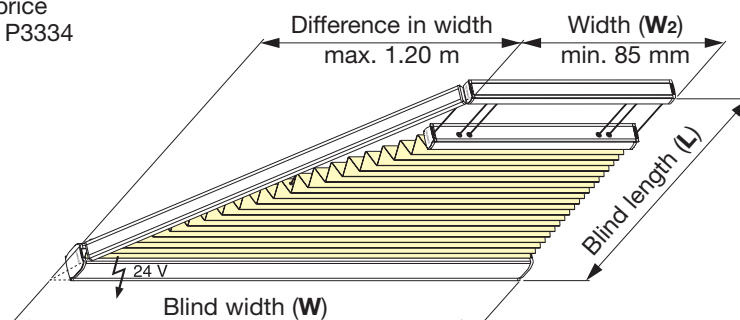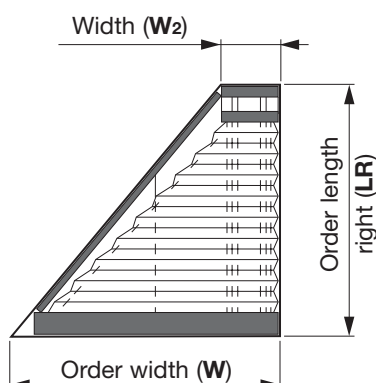


Blind length L

1.00 m
1.50 m
2.00 m


Stack height SH

56-63 mm
59-70 mm
63-77 mm




Accessories

Ceiling fixing
with
ceiling clip



Type P3335

Blind width:	min. 0.80 m (motor profile) max. 1.50 m (dependent on the fabric)
Blind length:	max. 2.00 m
Angle of inclination:	45°-90°
Difference in width:	max. 0.70 m each side
Width (W₂):	min. 0.10 m
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

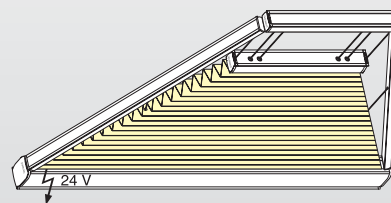

Tensioned blind with motor operation,
top track, wire tensioning and
one-sided sloped hanging
(up to 0.70 m each side)

TYPE P3335





Measuring and Pricing

Blind width = order width
Blind length = order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3335


Order dimensions: W, L, W₂

Note: please attach sketch

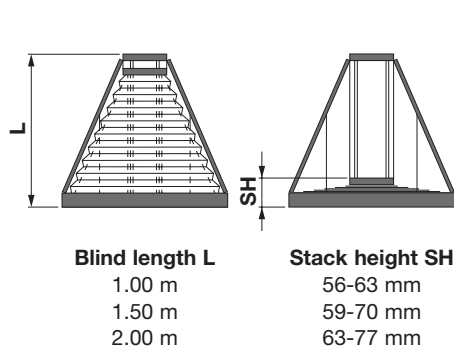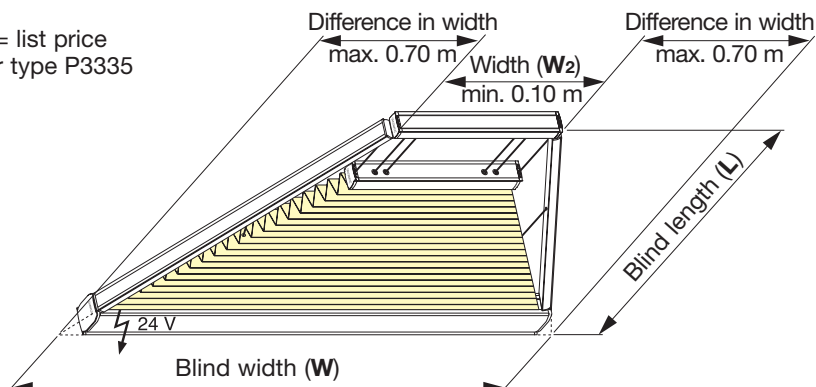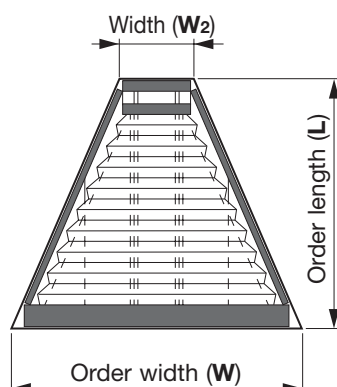


Accessories

Ceiling fixing
with
ceiling clip



Type P3336

Blind width:	min. 0.80 m (motor profile) max. 1.20 m (dependent on the fabric)
Blind length:	max. 2.00 m
Angle of inclination:	45°-90°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

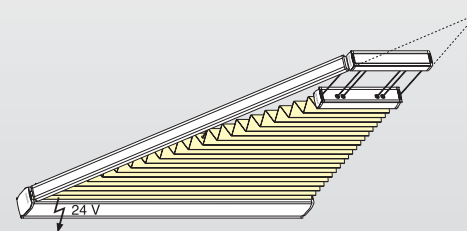

Tensioned triangular blind with motor operation, top track, wire tensioning and one-sided sloped hanging (up to 70 mm in the vertex)

TYPE P3336




Measuring and Pricing

Blind width	=	order width
Blind length	=	order length


Pricing: width (W) x length (L) = list price
+ additional charge for type P3336

Order dimensions: W, LL or LR


Note: please attach sketch

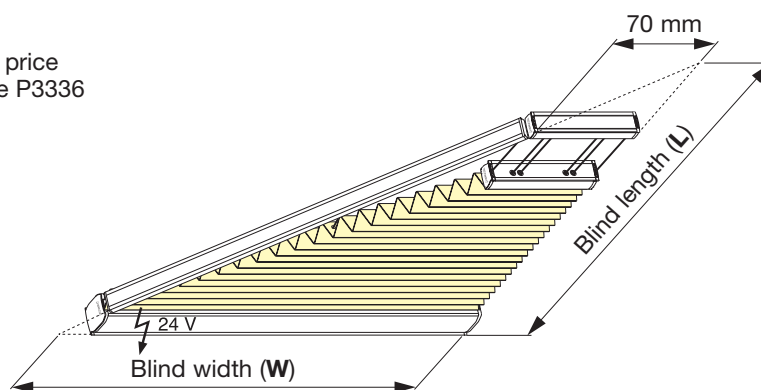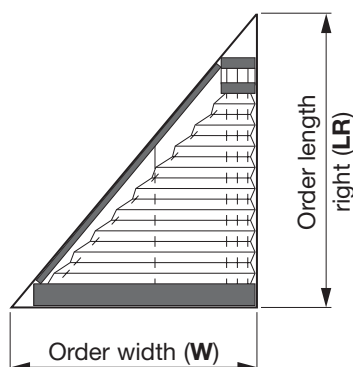

Blind length L
1.00 m
1.50 m
2.00 m






Stack height SH
56-63 mm
59-70 mm
63-77 mm



Accessories


Ceiling fixing
with
ceiling clip

Fixing
with
mounting strip



Type P3337

Blind width:	min. 0.80 m (motor profile) max. 1.50 m (dependent on the fabric)
Blind length:	max. 2.00 m
Angle of inclination:	45°-90°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Motor variant:	see motor variants (on page 95) (standard: motor variant A)

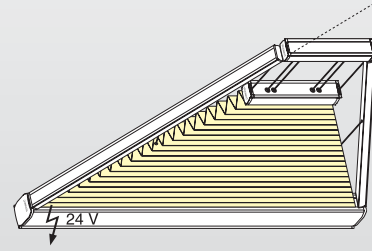

Tensioned triangular blind with motor operation, top track, wire tensioning and two-sided sloped hanging (up to 70 mm in the vertex)

TYPE P3337




Measuring and Pricing

Blind width = order width
Blind length = order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3337


Order dimensions: W, L

Note: please attach sketch

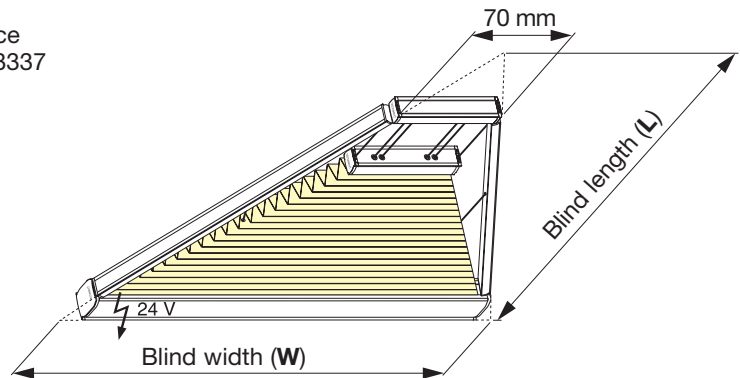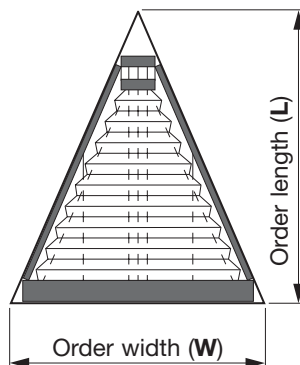


Blind length L

1.00 m
1.50 m
2.00 m





Stack height SH

56-63 mm
59-70 mm
63-77 mm




Accessories

Ceiling fixing
with
ceiling clip




Fixing
with
mounting strip



Type P3400

Blind width:	min. 0.30 m max. 1.50 m (dependent on the fabric)
Blind length:	max. 4.00 m
Angle of inclination:	45°-90°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m

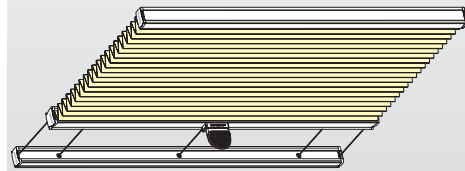

Tensioned blind with handle,
bottom track and wire tensioning



TYPE P3400

Measuring and Pricing

Blind width = order width
Blind length = order length


Pricing: width (W) x length (L) = list price

Order dimensions: W, L

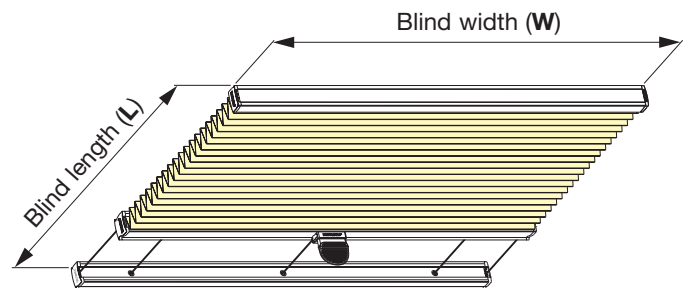


Blind length L

0.50 m
1.00 m
1.50 m
2.00 m
2.50 m
3.00 m
3.50 m
4.00 m




Stack height SH

35-39 mm
38-46 mm
42-53 mm
46-60 mm
49-66 mm
53-73 mm
56-80 mm
60-86 mm




Accessories

Ceiling fixing
with
ceiling clip



Type P3430

Blind width:	min. 0.30 m + difference in width max. 1.50 m (dependent on the fabric)
Blind length:	max. 4.00 m
Angle of inclination:	45°-90°
Difference in width:	max. 0.15 m
Hanging slope:	optional left or right
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m

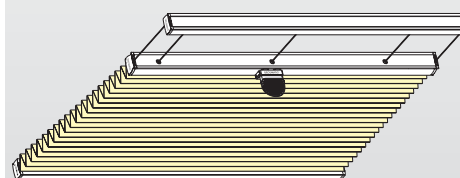

Tensioned blind with handle, top track, wire tensioning and one-sided sloped hanging (up to 0.15 m)

TYPE P3430




Measuring and Pricing

Blind width = order width
Blind length = order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3430


Order dimensions: W, LL or LR, W₂

Note: please attach sketch

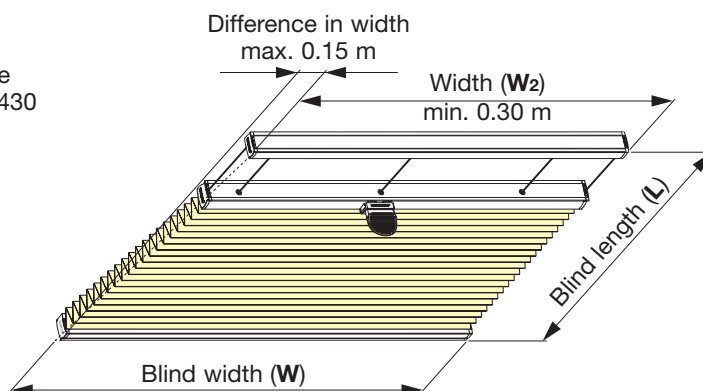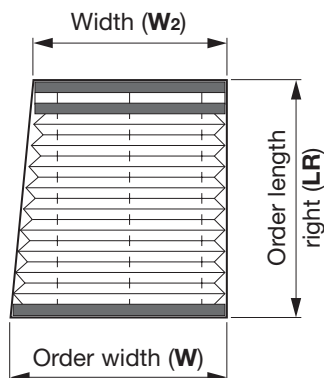


Blind length L

0.50 m
1.00 m
1.50 m
2.00 m
2.50 m
3.00 m
3.50 m
4.00 m




Stack height SH

35-39 mm
38-46 mm
42-53 mm
46-60 mm
49-66 mm
53-73 mm
56-80 mm
60-86 mm




Accessories

Ceiling fixing
with
ceiling clip



Type P3431

Blind width:	min. 0.30 m + 2 x difference in width max. 1.50 m (dependent on the fabric)
Blind length:	max. 4.00 m
Angle of inclination:	45°-90°
Difference in width:	max. 0.15 m each side
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m

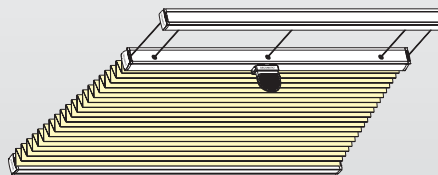

Tensioned blind with handle, top track, wire tensioning and two-sided sloped hanging (up to 0.15 m each side)

TYPE P3431




Measuring and Pricing

Blind width = order width
Blind length = order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3431


Order dimensions: W, L, W₂

Note: please attach sketch

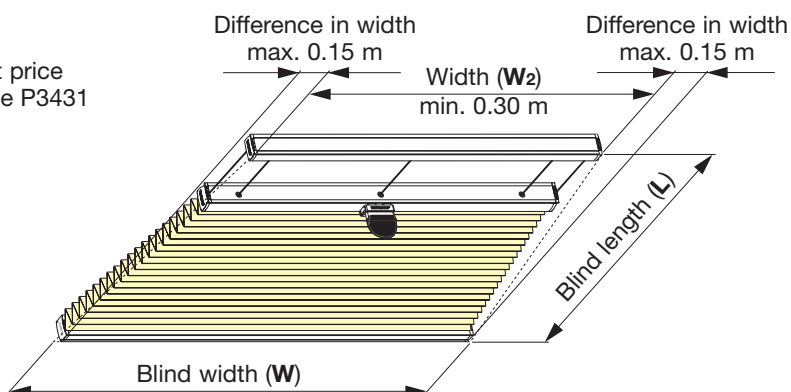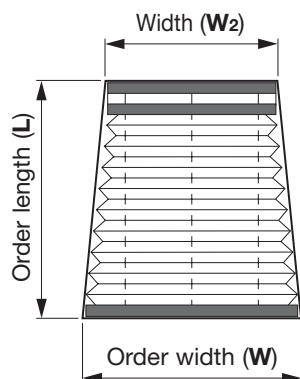


Blind length L

0.50 m
1.00 m
1.50 m
2.00 m
2.50 m
3.00 m
3.50 m
4.00 m




Stack height SH

35-39 mm
38-46 mm
42-53 mm
46-60 mm
49-66 mm
53-73 mm
56-80 mm
60-86 mm




Accessories

Ceiling fixing
with
ceiling clip



Type P3432

Blind width:	min. 0.30 m + difference in width max. 1.50 m (dependent on the fabric)
Blind length:	max. 2.50 m
Angle of inclination:	45°-90°
Difference in width:	max. 0.50 m
Hanging slope:	optional left or right
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m

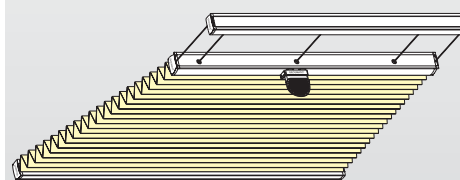

Tensioned blind with handle, top track, wire tensioning and one-sided sloped hanging (up to 0.15 m)

TYPE P3432




Measuring and Pricing

Blind width = **order width**
Blind length = **order length**

Pricing: width (W) x length (L) = list price
+ additional charge for type P3432


Order dimensions: W, LL or LR, W₂

Note: please attach sketch

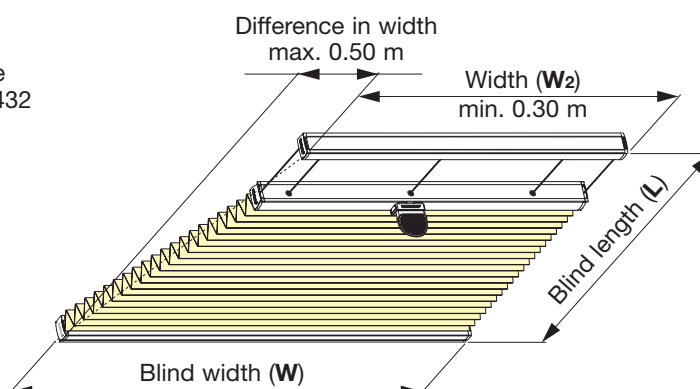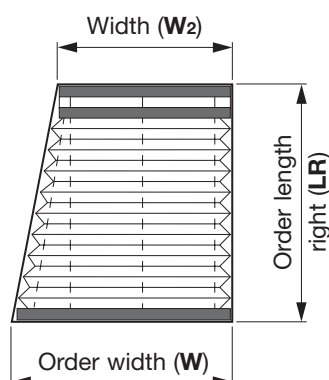


Blind length L

0.50 m
1.00 m
1.50 m
2.00 m
2.50 m




Stack height SH

35-39 mm
38-46 mm
42-53 mm
46-60 mm
49-66 mm




Accessories

Ceiling fixing
with
ceiling clip



Type P3433

Blind width:	min. 0.30 m + 2 x difference in width max. 1.50 m (dependent on the fabric)
Blind length:	max. 2.50 m
Angle of inclination:	45°-90°
Difference in width:	max. 0.50 m each side
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m

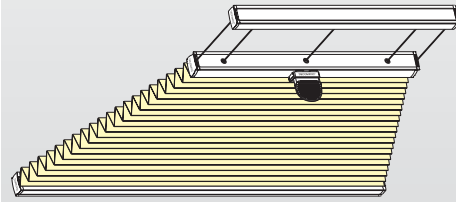

Tensioned blind with handle, top track, wire tensioning and two-sided sloped hanging (up to 0.50 m each side)

TYPE P3433




Measuring and Pricing

Blind width = order width
Blind length = order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3433


Order dimensions: W, L, W₂

Note: please attach sketch

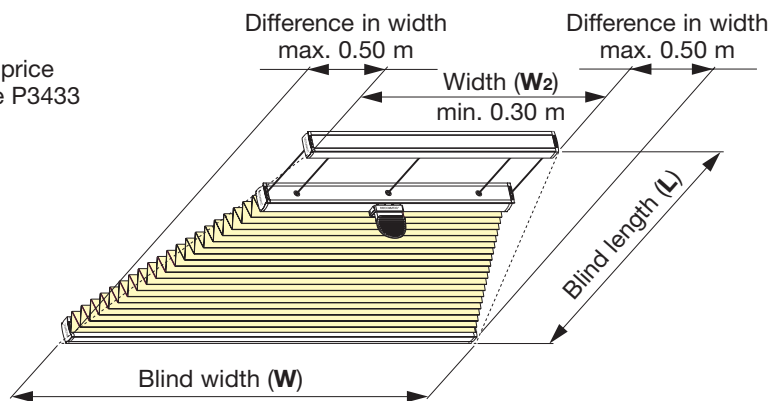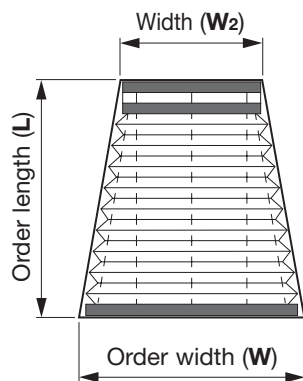


Blind length L

0.50 m
1.00 m
1.50 m
2.00 m
2.50 m




Stack height SH

35-39 mm
38-46 mm
42-53 mm
46-60 mm
49-66 mm




Accessories

Ceiling fixing
with
ceiling clip



Type P3434

Blind width:	min. 0.30 m max. 1.50 m (dependent on the fabric)
Blind length:	max. 2.00 m
Angle of inclination:	45°-90°
Difference in width:	max. 1.20 m
Hanging slope:	optional left or right
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m

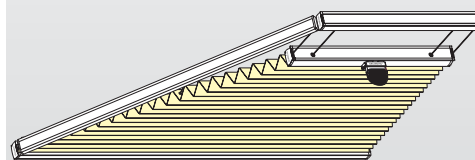

Tensioned blind with handle, top track, wire tensioning and one-sided sloped hanging (up to 1.20 m)

TYPE P3434





Measuring and Pricing

Blind width = order width
Blind length = order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3434


Order dimensions: W, LL or LR, W₂

Note: please attach sketch

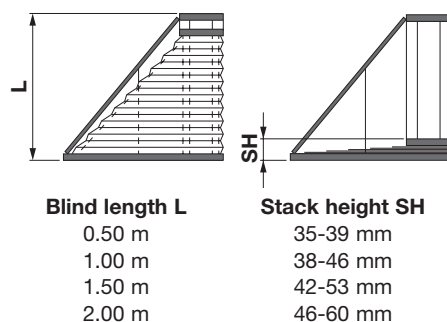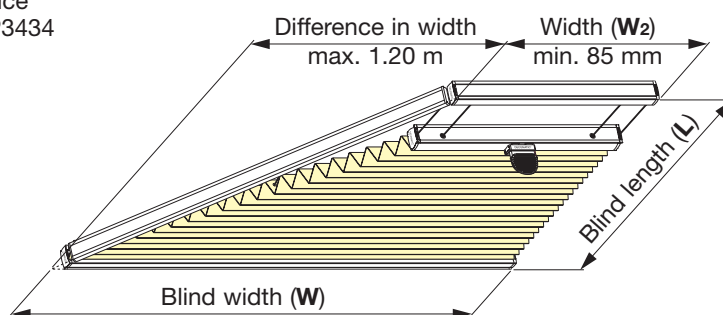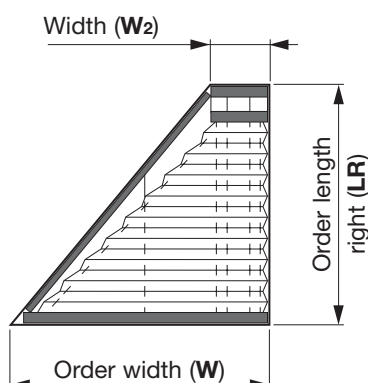


Accessories

Ceiling fixing
with
ceiling clip



Type P3435

Blind width:	min. 0.30 m max. 1.50 m (dependent on the fabric)
Blind length:	max. 2.00 m
Angle of inclination:	45°-90°
Difference in width:	max. 0.70 m each side
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m

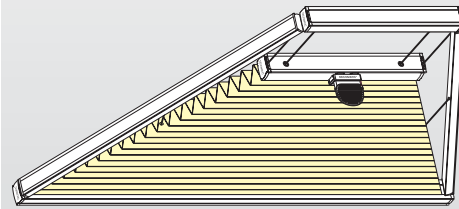

Tensioned blind with handle, top track, wire tensioning and two-sided sloped hanging (up to 0.70 m each side)

TYPE P3435




Measuring and Pricing

Blind width = order width
Blind length = order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3435

Order dimensions: W, L, W₂

Note: please attach sketch

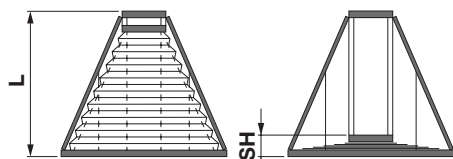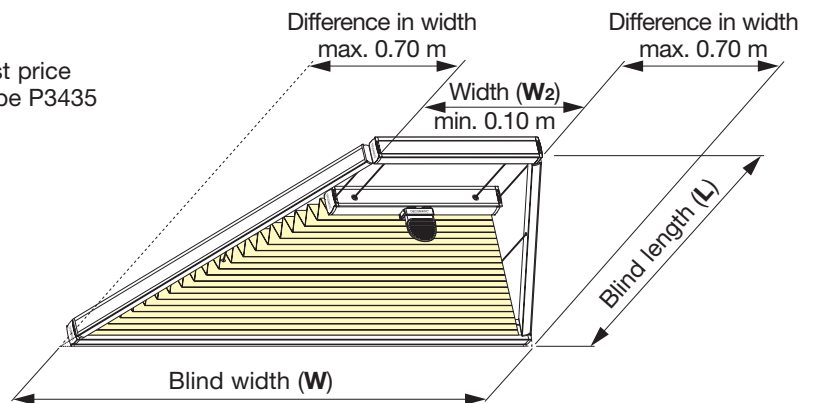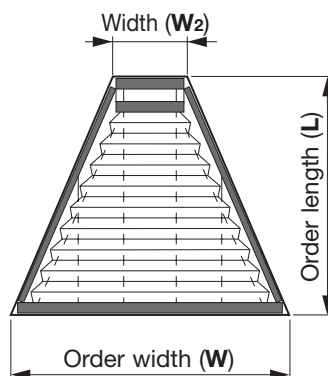


Blind length L

0.50 m
1.00 m
1.50 m
2.00 m


Stack height SH

35-39 mm
38-46 mm
42-53 mm
46-60 mm




Accessories

Ceiling fixing
with
ceiling clip



Type P3436

Blind width:	min. 0.30 m max. 1.20 m (dependent on the fabric)
Blind length:	max. 2.00 m
Angle of inclination:	45°-90°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m

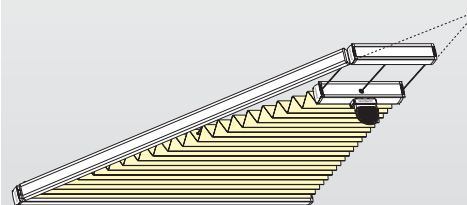

Tensioned triangular blind with handle,
top track, wire tensioning and
one-sided sloped hanging
(up to 0.70 m in the vertex)

TYPE P3436




Measuring and Pricing

Blind width = order width
Blind length = order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3436


Order dimensions: W, LL or LR

Note: please attach sketch

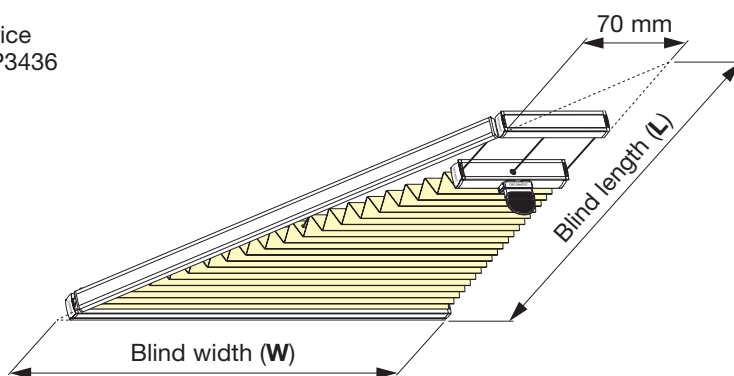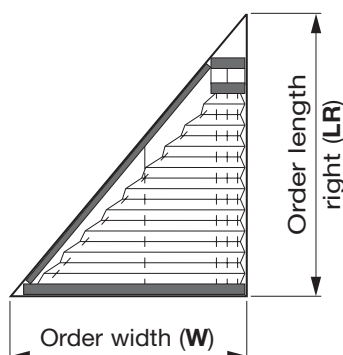


Blind length L

0.50 m
1.00 m
1.50 m
2.00 m




Stack height SH

35-39 mm
38-46 mm
42-53 mm
46-60 mm




Accessories

Ceiling fixing
with
ceiling clip




Fixing
with
mounting strip



Type P3437

Blind width:	min. 0.30 m max. 1.20 m (dependent on the fabric)
Blind length:	max. 2.00 m
Angle of inclination:	45°-90°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation option:	control rod 1.00 m, 1.50 m or 2.00 m

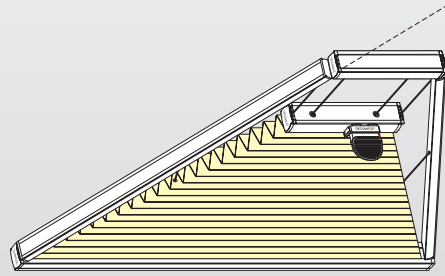

Tensioned triangular blind with handle, top track, wire tensioning and two-sided sloped hanging (up to 0.70 m in the vertex)

TYPE P3437




Measuring and Pricing

Blind width = order width
Blind length = order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3437


Order dimensions: W, L

Note: please attach sketch

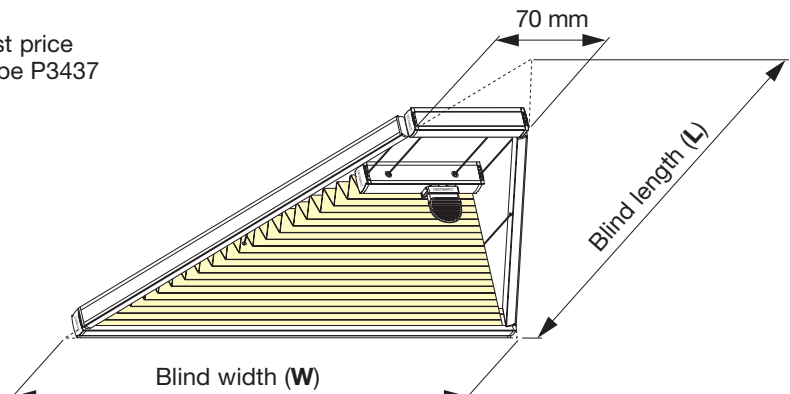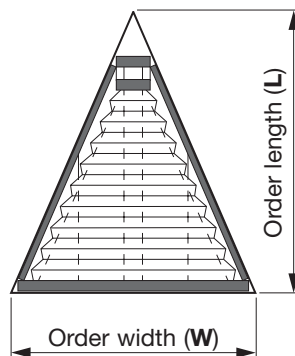


Blind length L

0.50 m
1.00 m
1.50 m
2.00 m




Stack height SH

35-39 mm
38-46 mm
42-53 mm
46-60 mm




Accessories

Ceiling fixing
with
ceiling clip




Fixing
with
mounting strip



Crank
handle

Type P3500

Blind width:	min. 0.75 m max. 1.50 m (dependent on the fabric)
Blind length:	max. 4.00 m
Angle of inclination:	45°-90°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation position:	left, right or central
Operation option:	crank or motorised handle 1.00 m, 1.50 m or 2.00 m

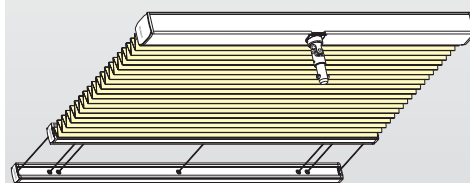

Tensioned blind with crank operation,
bottom track and wire tensioning


TYPE P3500



Measuring and Pricing


Blind width	=	order width
Blind length	=	order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3500

Order dimensions: W, L

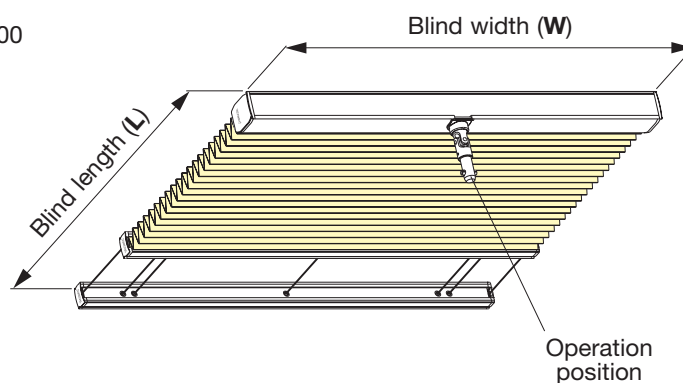


	
Blind length L	Stack height SH
1.00 m	56-63 mm
1.50 m	59-70 mm
2.00 m	63-77 mm
2.50 m	67-84 mm
3.00 m	70-91 mm
3.50 m	74-97 mm
4.00 m	77-104 mm




Accessories

Ceiling fixing
with
ceiling clip



Type P3502

Blind width:	min. 0.75 m max. 1.50 m (dependent on the fabric)
Blind length:	max. 4.00 m
Angle of inclination:	45°-90°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation position:	left, right or central
Operation option:	crank or motorised handle 1.00 m, 1.50 m or 2.00 m

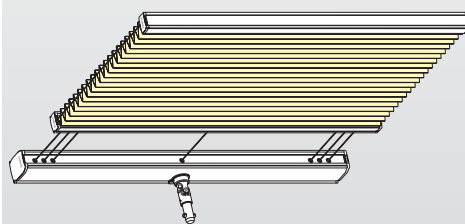

Tensioned blind with crank operation in bottom track and wire tensioning



TYPE P3502

Measuring and Pricing

Blind width	=	order width
Blind length	=	order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3502

Order dimensions: W, L

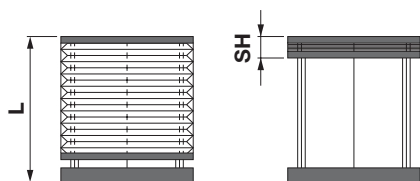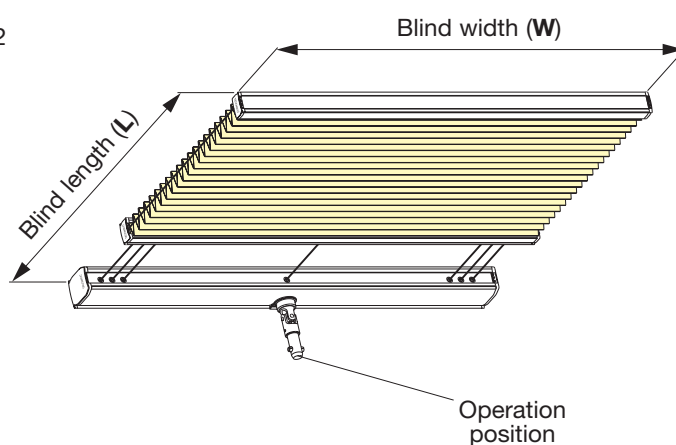


Blind length L

1.00 m
1.50 m
2.00 m
2.50 m
3.00 m
3.50 m
4.00 m


Stack height SH

34-42 mm
38-49 mm
42-56 mm
45-62 mm
49-69 mm
52-76 mm
56-82 mm



Accessories


Ceiling fixing
with
ceiling clip



Crank
handle

Type P3530

Blind width:	min. 0.75 m (drive profile) max. 1.50 m (dependent on the fabric)
Blind length:	max. 4.00 m
Angle of inclination:	45°-90°
Difference in width:	max. 0.15 m
Hanging slope:	optional left or right
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation position:	left, right or central
Operation option:	crank or motorised handle 1.00 m, 1.50 m or 2.00 m

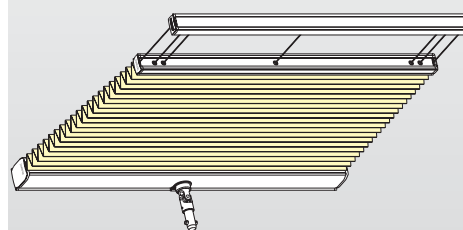

Tensioned blind with crank operation,
top track, wire tensioning and
one-sided sloped hanging
(up to 0.15 m)

TYPE P3530




Measuring and Pricing

Blind width = **order width**
Blind length = **order length**

Pricing: width (W) x length (L) = list price
+ additional charge for type P3530


Order dimensions: W, LL or LR, W₂

Note: please attach sketch

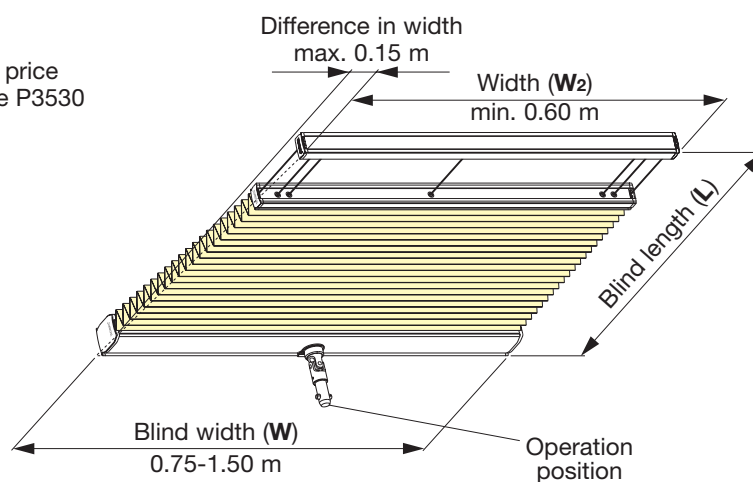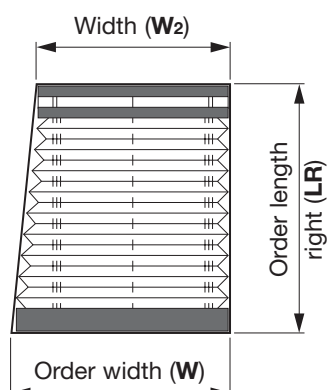


Blind length L

1.00 m
1.50 m
2.00 m
2.50 m
3.00 m
3.50 m
4.00 m





Stack height SH

56-63 mm
59-70 mm
63-77 mm
67-84 mm
70-91 mm
74-97 mm
77-104 mm




Accessories

Ceiling fixing
with
ceiling clip



Type P3531

Blind width:	min. 0.75 m (drive profile) max. 1.50 m (dependent on the fabric)
Blind length:	max. 4.00 m
Angle of inclination:	45°-90°
Difference in width:	max. 0.15 m each side
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation position:	left, right or central
Operation option:	crank or motorised handle 1.00 m, 1.50 m or 2.00 m

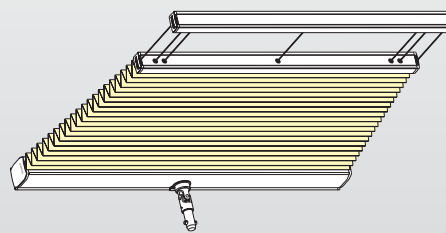

Tensioned blind with crank operation,
top track, wire tensioning and
two-sided sloped hanging
(up to 0.15 m each side)

TYPE P3531




Measuring and Pricing

Blind width = order width
Blind length = order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3531


Order dimensions: W, L, W₂

Note: please attach sketch

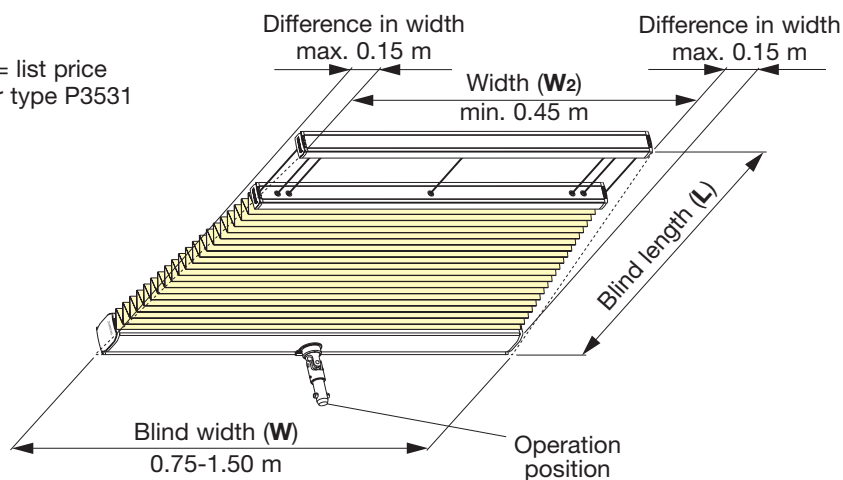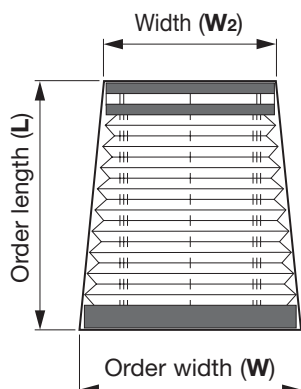


Blind length L

1.00 m
1.50 m
2.00 m
2.50 m
3.00 m
3.50 m
4.00 m





Stack height SH

56-63 mm
59-70 mm
63-77 mm
67-84 mm
70-91 mm
74-97 mm
77-104 mm



Accessories


Ceiling fixing
with
ceiling clip



Crank
handle

Type P3532

Blind width:	min. 0.75 m (drive profile) max. 1.50 m (dependent on the fabric)
Blind length:	max. 2.50 m
Angle of inclination:	45°-90°
Difference in width:	max. 0.50 m
Hanging slope:	optional left or right
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation position:	left, right or central
Operation option:	crank or motorised handle 1.00 m, 1.50 m or 2.00 m

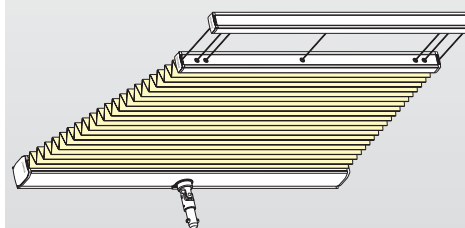

Tensioned blind with crank operation,
top track, wire tensioning and
one-sided sloped hanging
(up to 0.50 m)

TYPE P3532




Measuring and Pricing

Blind width = **order width**
Blind length = **order length**

Pricing: width (W) x length (L) = list price
+ additional charge for type P3532


Order dimensions: W, LL or LR, W₂

Note: please attach sketch

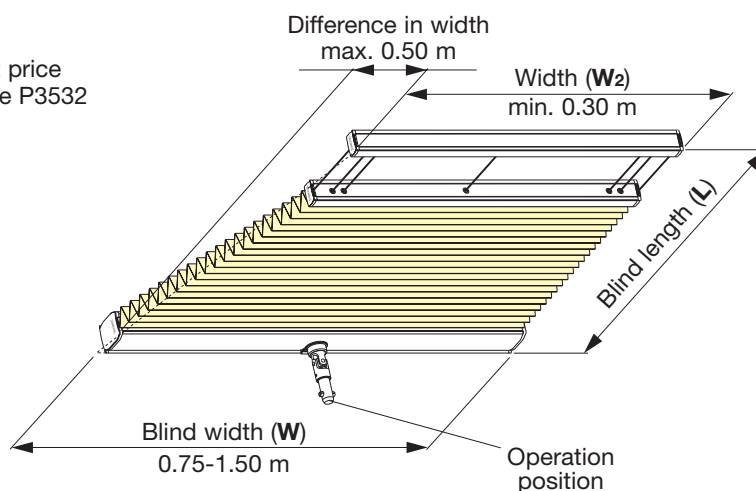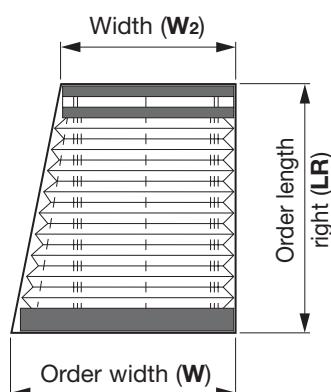


Blind length L

1.00 m
1.50 m
2.00 m
2.50 m





Stack height SH

56-63 mm
59-70 mm
63-77 mm
67-84 mm




Accessories

Ceiling fixing
with
ceiling clip



Type P3533

Blind width:	min. 0.75 m (drive profile) max. 1.50 m (dependent on the fabric)
Blind length:	max. 2.50 m
Angle of inclination:	45°-90°
Difference in width:	max. 0.50 m each side
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation position:	left, right or central
Operation option:	crank or motorised handle 1.00 m, 1.50 m or 2.00 m

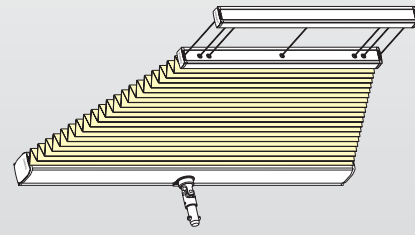

Tensioned blind with crank operation,
top track, wire tensioning and
two-sided sloped hanging
(up to 0.50 m each side)

TYPE P3533



Measuring and Pricing

Blind width = order width
Blind length = order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3533


Order dimensions: W, L, W₂

Note: please attach sketch

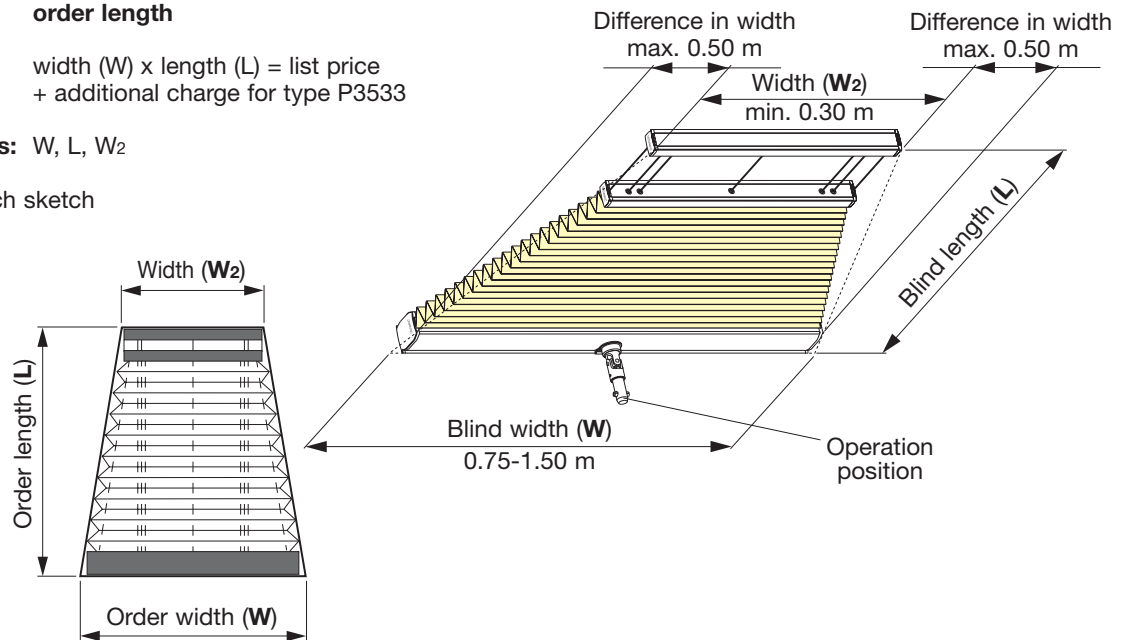


Blind length L

1.00 m
1.50 m
2.00 m
2.50 m




Stack height SH

56-63 mm
59-70 mm
63-77 mm
67-84 mm



Accessories


Ceiling fixing
with
ceiling clip

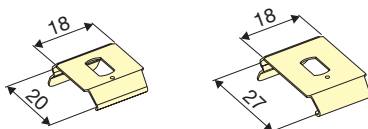

Crank
handle

Type P3534

Blind width:	min. 0.75 m (drive profile) max. 1.50 m (dependent on the fabric)
Blind length:	max. 2.00 m
Angle of inclination:	45°-90°
Difference in width:	max. 1.20 m
Width W₂:	min. 70 mm
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation position:	left, right or central
Operation option:	crank or motorised handle 1.00 m, 1.50 m or 2.00 m

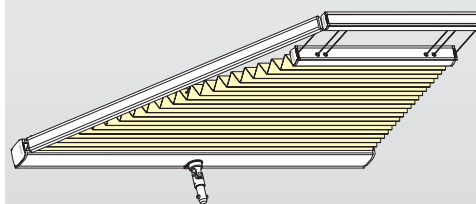

Tensioned blind with crank operation,
top track, wire tensioning and
one-sided sloped hanging
(up to 1.20 m)

TYPE P3534




Measuring and Pricing

Blind width = order width
Blind length = order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3534

Order dimensions: W, LL or LR, W₂

Note: please attach sketch

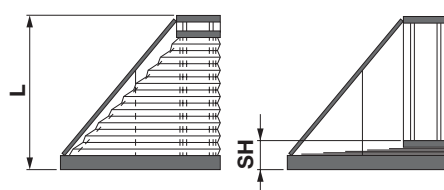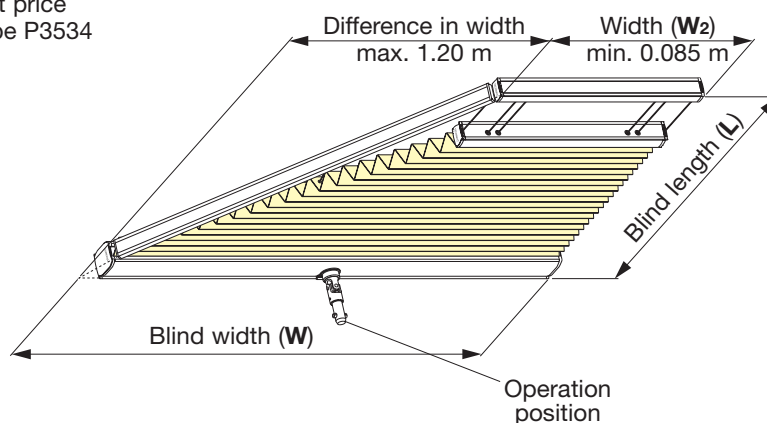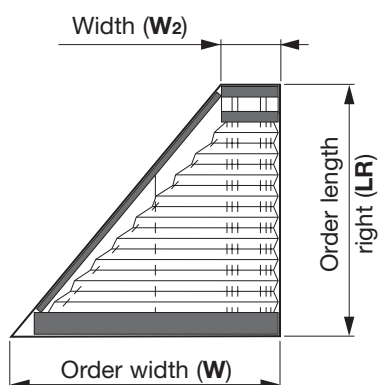


Blind length L

1.00 m
1.50 m
2.00 m


Stack height SH

56-63 mm
59-70 mm
63-77 mm




Accessories

Ceiling fixing
with
ceiling clip



Type P3535

Blind width:	min. 0.75 m (drive profile) max. 1.50 m (dependent on the fabric)
Blind length:	max. 2.00 m
Angle of inclination:	45°-90°
Difference in width:	max. 0.70 m each side
Width W₂:	min. 0.10 m
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation position:	left, right or central
Operation option:	crank or motorised handle 1.00 m, 1.50 m or 2.00 m

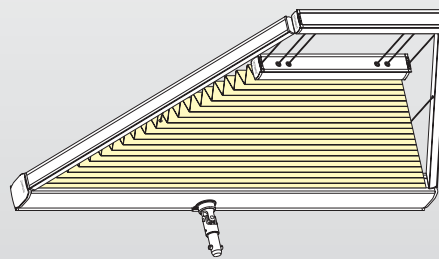

Tensioned blind with crank operation,
top track, wire tensioning and
two-sided sloped hanging
(up to 0.70 m each side)

TYPE P3535





Measuring and Pricing

Blind width = order width
Blind length = order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3535


Order dimensions: W, L, W₂

Note: please attach sketch

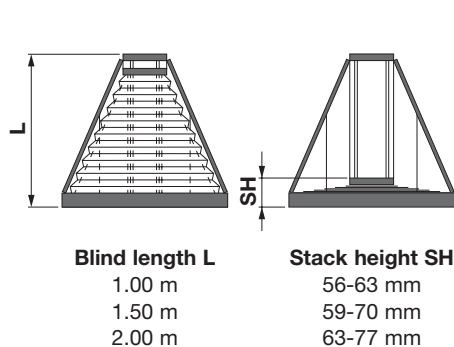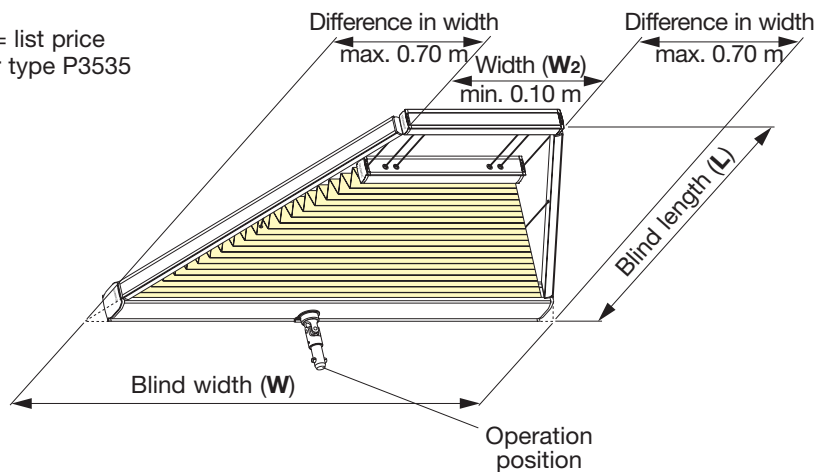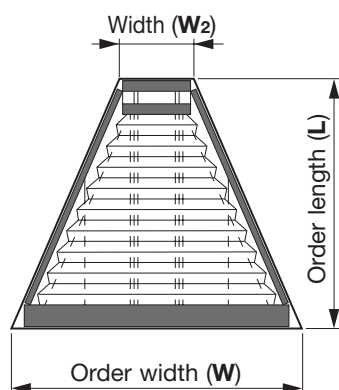

Accessories


Ceiling fixing
with
ceiling clip



Crank
handle

Type P3536

Blind width:	min. 0.75 m (drive profile) max. 1.50 m (dependent on the fabric)
Blind length:	max. 2.00 m
Angle of inclination:	45°-90°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation position:	left, right or central
Operation option:	crank or motorised handle 1.00 m, 1.50 m or 2.00 m

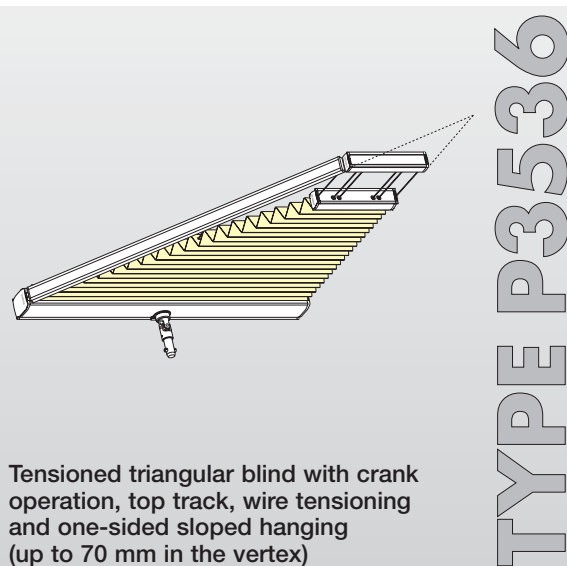




Measuring and Pricing

Blind width = order width
Blind length = order length


Pricing: width (W) x length (L) = list price
 + additional charge for type P3536

Order dimensions: W, LL or LR


Note: please attach sketch

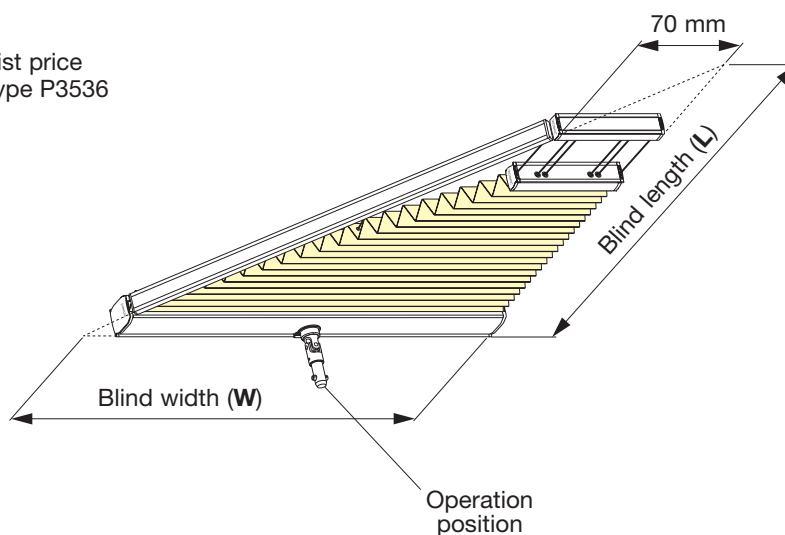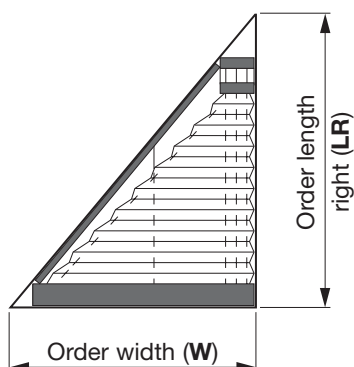

Blind length L
 1.00 m
 1.50 m
 2.00 m






Stack height SH
 56-63 mm
 59-70 mm
 63-77 mm



Accessories


Ceiling fixing
 with
 ceiling clip

Fixing
 with
 mounting strip



Type P3537

Blind width:	min. 0.75 m (drive profile) max. 1.50 m (dependent on the fabric)
Blind length:	max. 2.00 m
Angle of inclination:	45°-90°
Pattern of the hanging:	optional facing inwards or outwards (standard: facing inwards)
Profile colour:	optional aluminium, white, black or bronze
Operation position:	left, right or central
Operation option:	crank or motorised handle 1.00 m, 1.50 m or 2.00 m

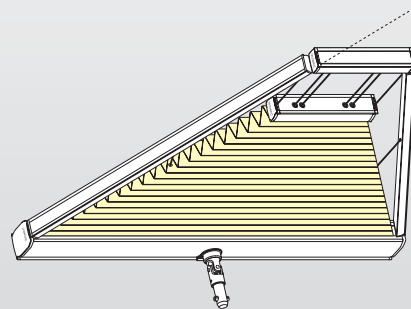

Tensioned blind with crank operation,
top track, wire tensioning and
two-sided sloped hanging
(up to 70 mm in the vertex)

TYPE P3537




Measuring and Pricing

Blind width = order width
Blind length = order length

Pricing: width (W) x length (L) = list price
+ additional charge for type P3537


Order dimensions: W, L

Note: please attach sketch

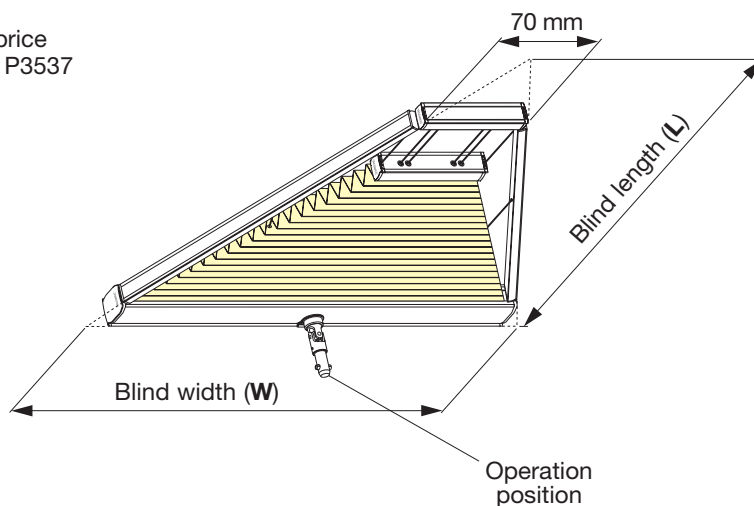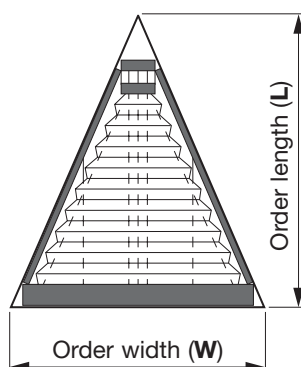


Blind length L

1.00 m
1.50 m
2.00 m





Stack height SH

56-63 mm
59-70 mm
63-77 mm




Accessories

Ceiling fixing
with
ceiling clip



Fixing
with
mounting strip




Crank
handle

Mounting


Face fix bracket 60-108 mm

Distance to wall adjustable from 60-108 mm, galvanised, white, black or bronze.

with clip, 20 mm




with clip, 27 mm




Block holder

Clamping with a white block holder on the wing of a window.

Block holder



Block holder for cord guiding




Guidance


Side profile, rooflight

For different angles of the frame, in silver, white, black or bronze. Length: max. 4.00 m


90°



96°




105°



Operation


Control rod

Anodised control rod with articulation joint for tensioned blinds, grips the operation handle. Length: 1.00 m, 1.50 m or 2.00 m

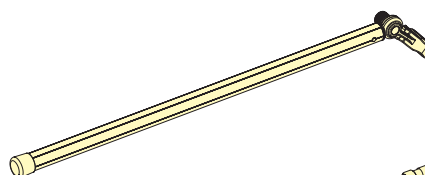


Crank handle

Handle for ceiling blinds with crank operation. Length: 1.00 m, 1.50 m or 2.00 m

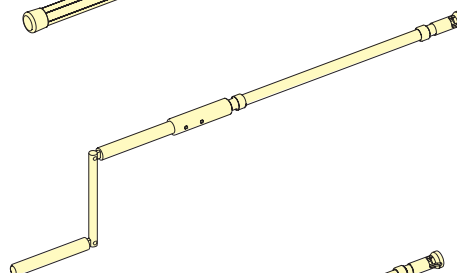

Motorised handle

Electric handle for ceiling blinds with crank operation incl. battery and charger. Length: 1.00 m, 1.50 m or 2.00 m

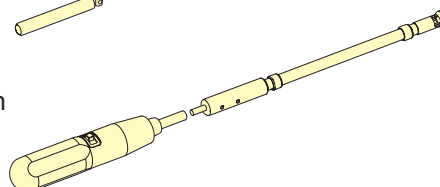


Cord clamp, self-adhesive

For clamping the cord; white.



Chain holder set


For clamping the operation chain in grey, white, black or bronze.



Mounting


Mounting profile

25 mm aluminium profile,
white powder-coated,
anodised silver, black or bronze.

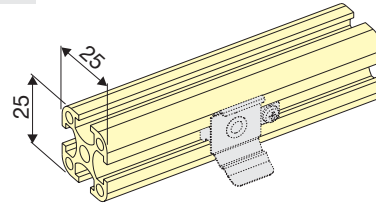


Clamping set with clip

Clip mounting for mounting profile
with setting screw.



Mounting angle


For mounting profile with fastening material.
Aluminium die casting in silver, white, black or
bronze.

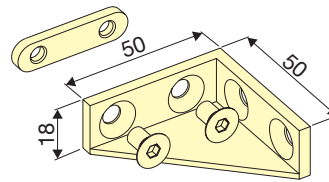

Mounting distance

In order to guarantee sufficient ventilation, a minimum spacing distance of 100 mm should be maintained between pleated blind and glass plane.

Furthermore, allowance should be made for ventilation gaps.

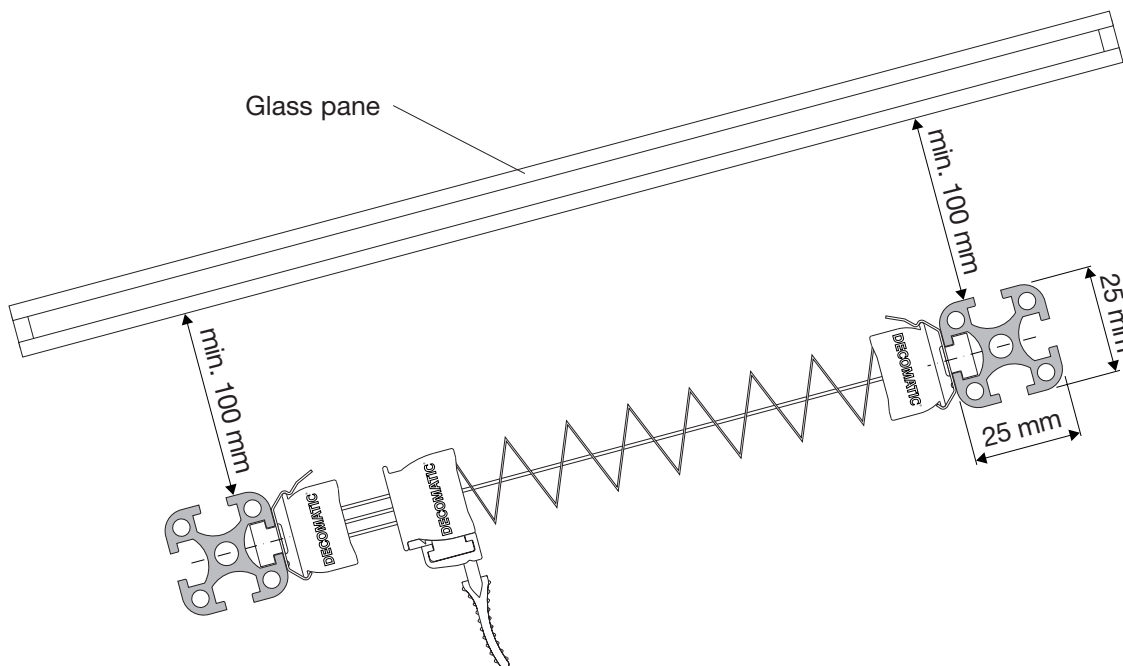

Technical specifications Motor

Standard-Motor / Heavy-duty Motor


Central drive with integrated brake and with minimum noise level. Travel limit with stop/spindle lock.

Dimensions: Ø24 x 201 mm • **Max. size of the hanging:** 3 m² / 5 m² • **Rated voltage:** 24 V DC

• **Connection:** 2.5 m cabling • **Rated torque:** 0.4 Nm / 0.8 Nm • **Rated speed:** 40 min⁻¹ / 30 min⁻¹

• **Max. current consumption:** 0.45 A / 0.6 A • **Power consumption:** 11 W / 14 W

• **Operating temperature:** -10 up to +60 °C • **System of protection:** IP40.

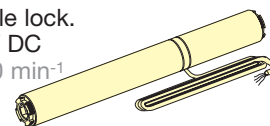


Power supply

Power pack with plug

Dimensions: 92.5 x 58 x 51 mm (l x b x h) • **Connections:** primary – EURO flat plug;

secondary – 2 m cable • **Input voltage:** 230 V AC • **Output voltage:** 24 V DC / 0.38 A adjusted

• **Line frequency:** 50-60 Hz • **Index of protection:** 2 • **Operating temperature:** 0-40 °C.




Power pack (flush-mounted) – UPS 10

Dimensions: Ø52 x 30 mm • **Connections:** primary – plug-in terminals; secondary – 2 m cable

• **Input voltage:** 230 V AC • **Output voltage:** 24 V DC / 0.38 A adjusted

• **Line frequency:** 50-60 Hz • **Index of protection:** 2 • **Operating temperature:** 0-40 °C.




Power pack (with integrated switch) – CL 9000

Dimensions: 70 x 70 x 48 mm (l x b x h) • **Connections:** primary – plug-in terminals; secondary –

screw-type terminals • **Input voltage:** 230 V AC • **Output voltage:** 24 V DC / 0.38 A adjusted

• **Line frequency:** 50-60 Hz • **Index of protection:** 2 • **Operating temperature:** 0-40 °C.



Switches

Rocker switch

Also available with surface mounting box • **Colour:** alpin white

Dimensions: 32 x 25 x 35 mm (l x b x h) • **Max. current carrying capacity:** 3.5 A

Rotary switch


Available as surface mounted or flush mounted • **Colour:** alpin white

Dimensions: 70 x 70 x 40 mm (l x b x h) • **Max. current carrying capacity:** 10 A

Push-button combination

Up-down-stop button • **Dimensions:** 70 x 70 x 40 mm (l x b x h)

• **Max. current carrying capacity:** 10 A

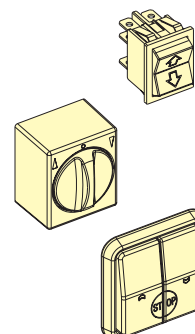

Infrared Remote Control

Transmitter

1 channel – ITR 103

Dimensions: 118 x 45 x 14 mm (l x b x h) • **Weight:** 45 g • **Functions:** 3 • **Transmission channel:**

1 fixed channel • **Range:** approx. 7 m • **Voltage supply:** 1.5 V DC (Micro LR06).

8 channel – ITR 803

Group/central operation possible. **Dimensions:** 162 x 50 x 20 mm (l x b x h) • **Weight:** 63 g

• **Functions:** 3 • **Transmission channels:** 8 channels • **Range:** approx. 7 m


• **Voltage supply:** 1.5 V DC (Micro LR06).

Receiver – IRS 100/IRS 300

Dimensions: 76 x 50 x 32 mm (l x b x h) • **Reception channels:** 1 or 8 • **Voltage supply:** 24 V DC

• **Connections:** via screw-type terminal • **Max. current carrying capacity:** max. 3 A

• **Operating temperature:** 0-40 °C • On IRS 300 additional switch connection possible.

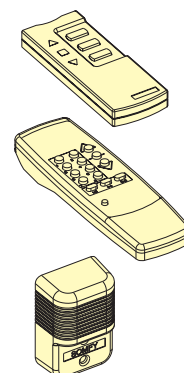

Solar Detector and Timer


Solar detector – SM 2000-2

Manual control or via sunlight intensity.

Dimensions: 58 x 61 x 43 mm (l x b x h) • **Voltage supply:** 230 V AC • **Connections:** via screw-type

terminal • **Operating temperature:** 0-40 °C

• Potential-free outputs • microprocessor controlled.



Timer – C2


Manual control or via timer.

Dimensions: 70 x 70 x 43 mm (l x b x h) • **Voltage supply:**

230 V AC • **Connections:** via screw-type terminal • **System**

of protection: IP 40 • **Operating temperature:** 0-40 °C


• Potential-free outputs • microprocessor controlled.



Additional options




- Individual modules can be added to existing blinds.
- Retrofit kits are also available.
- Detailed information about group and central controls (such as for example cabling, technical information, etc.) as well as lists of accessories for installations in large buildings and for blinds with large dimensions are available on inquiry.

Variant A

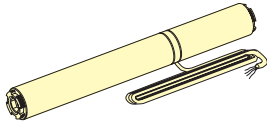



A = 24 volt standard motor (without operation equipment).

Variant B

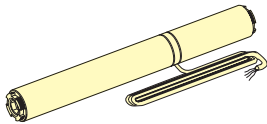




B = 24 volt standard motor with double-pole surface mounted rotary switch and power pack with plug.

Variant C

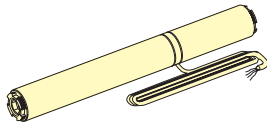





C = 24 volt standard motor with switch (double-pole with integrated power pack).

Variant D

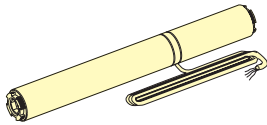




D = 24 volt standard motor with infrared-receiver and transmitter (1 channel) and power pack with plug.

Variant E

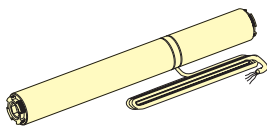


E = 24 volt standard motor with infrared-receiver, push-button combination (flush mounted), flush mounted power pack and infrared transmitter with 8 channels (for an independent control of several blinds with one transmitter).

Variant F

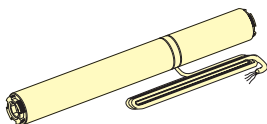

F = 24 volt standard motor with infrared-receiver, push-button combination (flush mounted) and flush mounted power pack.

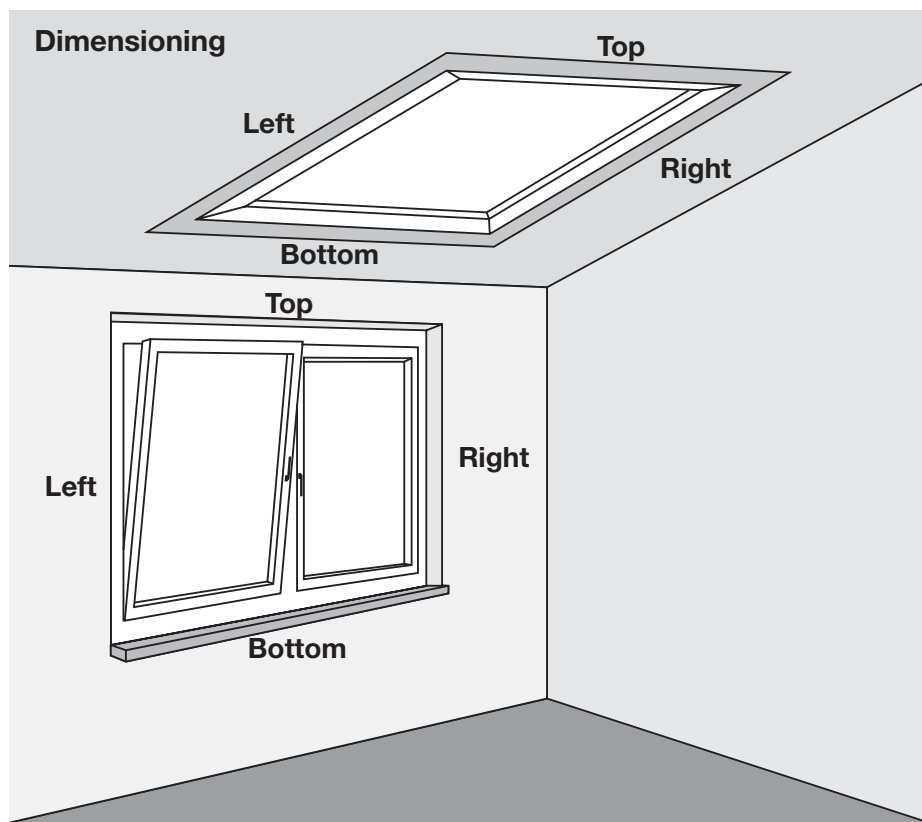



Ventilation Notice

Mounting in a conservatory



The pleated blind is an ideal sun protection system for each conservatory. Good ventilation must be ensured, which can be achieved by a minimum distance to the glazing and by ventilation gaps at the top and at the bottom. Insufficient ventilation can produce heat accumulation and condensation.

We do not grant any guarantee neither for fabric damages caused by dripping water or insect excrements nor for glass damages.

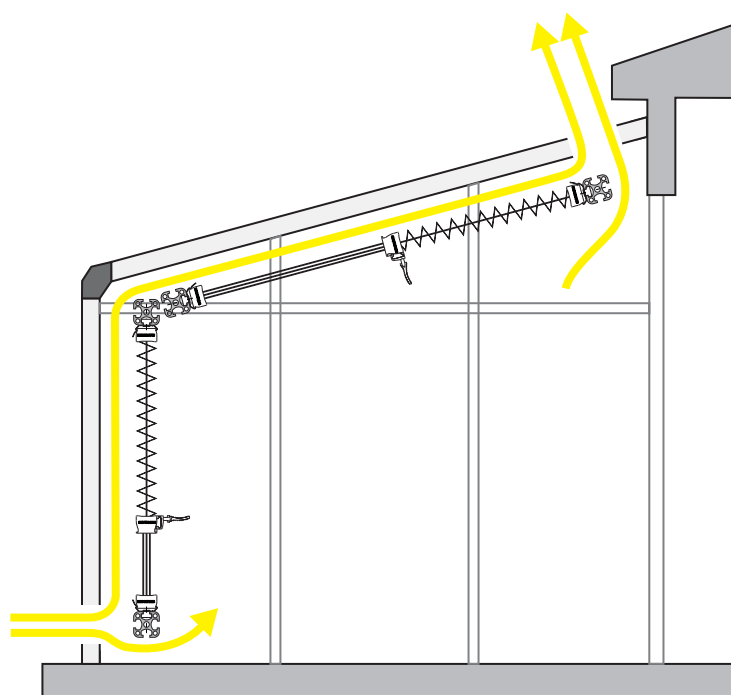


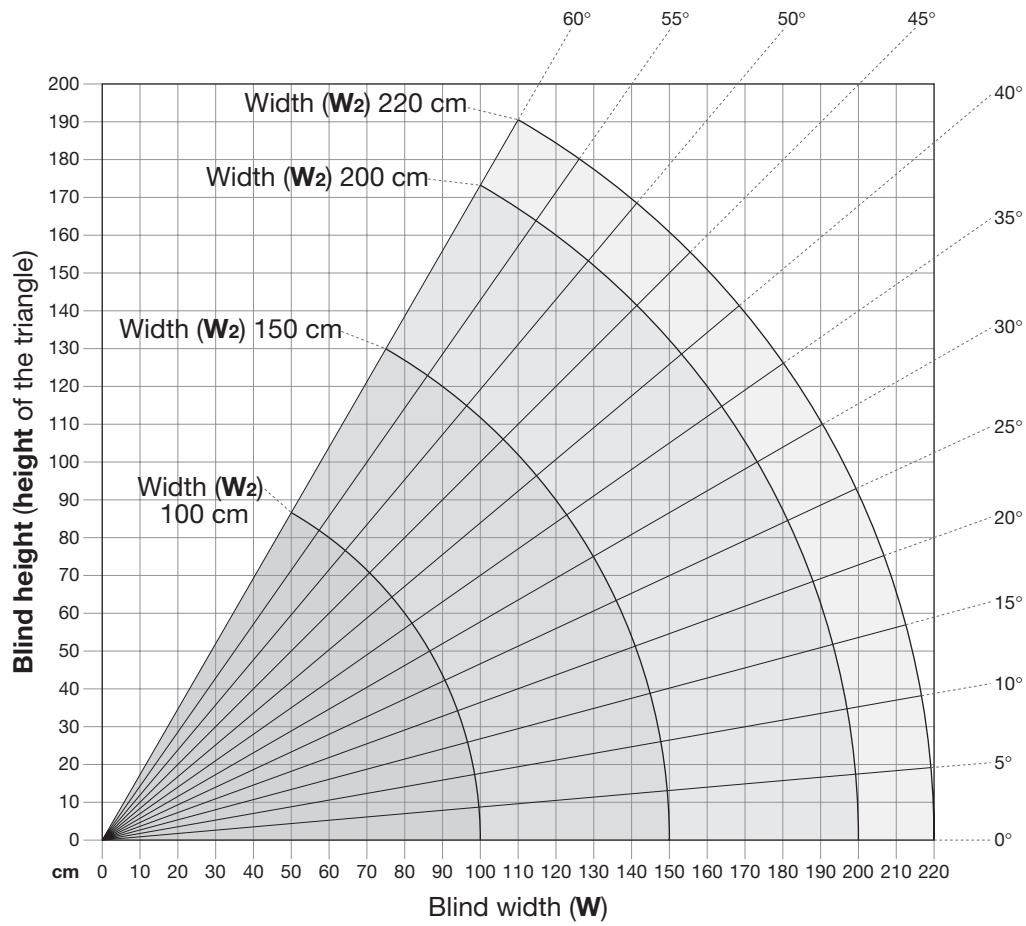

Type P1140
Type P1340

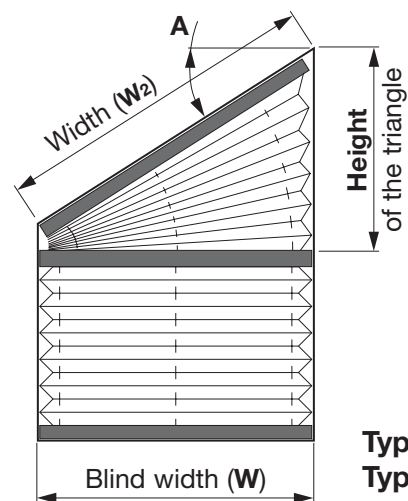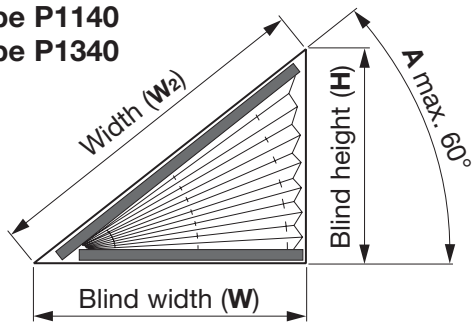

Type P1150
Type P1450

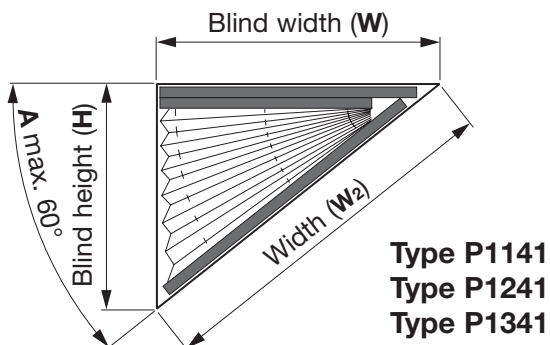

Physical properties

Reflection (R)

is the energy share not absorbed by a body
(light rays are reflected).

Transmission (T)


is the energy passing through a body
(light rays pass through the fabric).

Absorption (A)

states the share of energy converted by a body to heat
(light rays are absorbed by the body).

These three values add up to 100 % energy.

$$R + T + A = 100 \% \text{ energy}$$

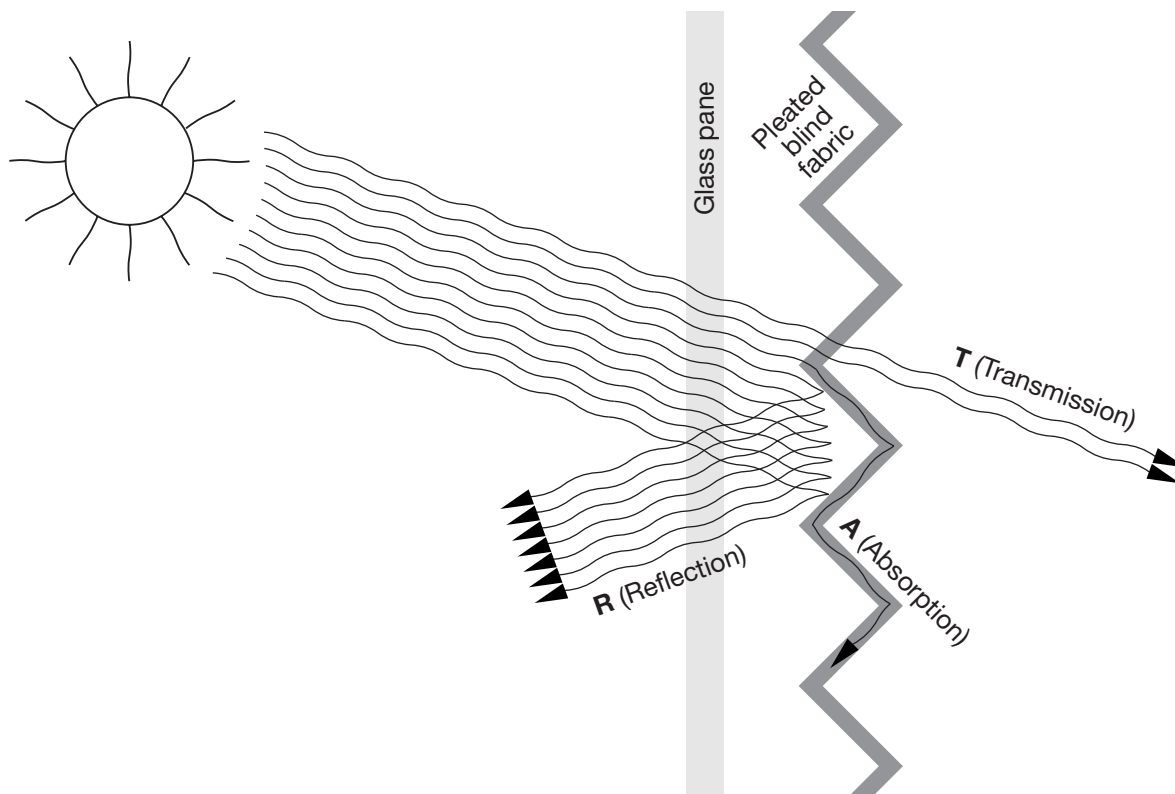

The above mentioned concepts reflection, transmission and absorption are very different from collection to collection.

Specially finished pleated blind qualities are very efficient regarding their RTA-values.

These are fabrics with an **aluminium coated** surface.

The specific light reflection degree is on average approx. 60 %. Relating to the light transmission there are significant differences, which are to a considerable extent caused by the structure of the carrier fabric. That means the more open a fabric is woven the more light can penetrate the fabric.

This applies also to the second category of finished textiles. In order to achieve a high light reflection this quality is finished with a **mother-of-pearl coating** on its fabric surface facing outwards. These fabrics have a higher grade of light reflection than aluminium coated fabrics. Furthermore they are resistant to the contact of splash water or insect excrements.

These both types of fabrics are mainly used in the public building industry. Although recently the mother-of-pearl coated fabrics are more and more found in the private sector (e. g. in conservatories).

Order DECOMATIC® Pleated Blind 		Commission:					Page:		
		Customer		Delivery address			Type of delivery		
							Forwarding agency		
							Standard parcel agency		
Order no.		Date		Delivery date:		Express parcel agency			
Sketch / Special requests		Item		1	2	3	4	5	
		Type							
		No. of pcs.							
		Order width W mm							
		Order height H mm							
		Width W2 mm							
		Height H2 mm							
		Order height/length left HL/LL mm							
		Order height/length right HR/LR mm							
		Hanging slope	left						
			right						
		Fabric	At the top	Catalogue No.					
			At the bottom	Catalogue No.					
		Pattern	Inside (standard)						
			Outside						
		Profile colour	Aluminium						
			White						
			Black						
			Bronze						
		Fixing	with ceiling clip						
			with wall fix bracket						
			with wall fix bracket 60 – 108 mm						
			Block holder						
		Operation	Operation left						
			Operation right						
			Height	standard					
			Height	mm					
			Position (only with crank)						
Control rod	L = 100 cm								
	L = 150 cm								
	L = 200 cm								
Crank operation	Crank	L = 100 cm							
		L = 150 cm							
		L = 200 cm							
	Motorised handle	L = 100 cm							
		L = 150 cm							
		L = 200 cm							
Motor variant (A, B, C, D, E or F)									
Optional	Tension profile								

For this order our terms of delivery are understood to be valid. The made-to-measure products can neither be cancelled, exchanged nor taken back.

