

Slope^{line}

ŠIKMÉ ŽALUZIE



DOKONALÉ ŘEŠENÍ PRO OKNA ATYPICKÝCH TVARŮ



systra

Head rail

"U" profile of extruded aluminium with dimensions 27x22x2(version EXCLUSIV) with special inside grooves for fixing the support for the tilting roller of the string ladder, for the mounting bracket and for possible covering of the head rail with a slat tape. Another version - of steel plate with dimensions 27 x 19 mm(version STANDARD).

Bottom rail

steel plate with dimensions 24x6 mm (for slats 25 mm),33x7 mm (for slats 35mm).

Alternatively is supplyable a two-piece aluminium profile with dimensions 19x10mm.

The bottom rails of steel plates are varnished on both sides, as well the aluminium profile.

Slats

slats 25 or 35 mm, concave convex profiled, high strength aluminium alloy, slat thickness 0,21 mm.

Holes in slats for cords and guide strings are in dimensions 2,5x6,5/10mm.

Alternatively it is possible to use wooden slats of American basswood with dimensions 27x3mm.

Textile components

Roll-up cord 1,4mm and string ladder of strong polyester, engraining already in the basic material, colour versions according to the current offer.

Plastic components

strong and elastic components of a plastic and not frangible material for higher temperatures. This applies mainly to the bottom rail end caps, tape lock buttons, supports and tape rolls.

Guiding strings

monofilament PAD with cross-section 0,68-1,5mm, or PVC-coated steel cord with diameter 1,5 mm, fixed in the head rail with a steel stop ring or with an aluminium rivet, fixation down in the window-frame with retaining grommets.


Maximum dimensions

maximum width	3000mm *
maximum height	2500mm
maximum area	5m2**

* not possible for all types - consultation needed



** necessary consultation with the production for areas bigger than 5m2

Simple remote control


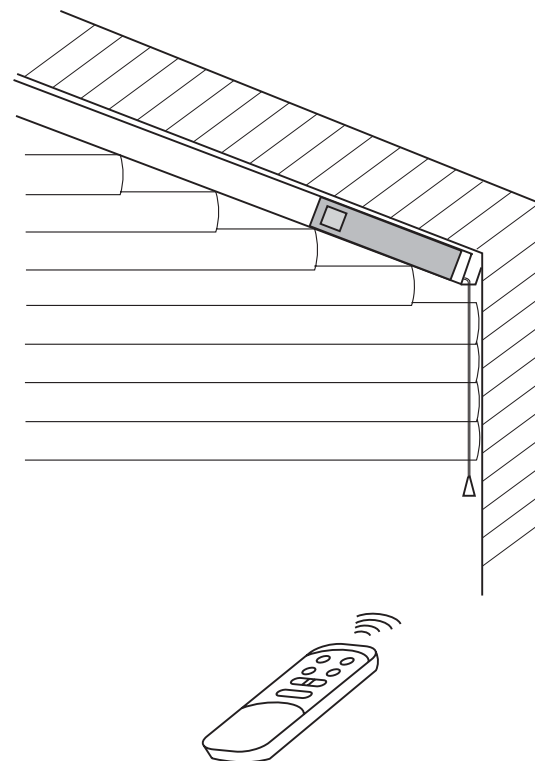




Slope blind head rail - dimensions





Slope blind controls

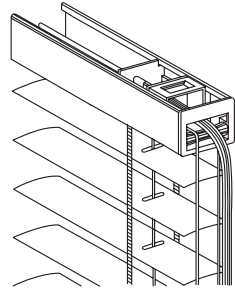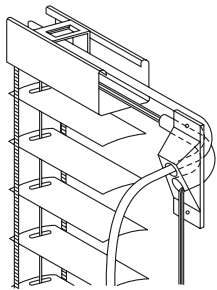

Type 1 - inter-glass blind





Type 2 - interior blind with side outlet

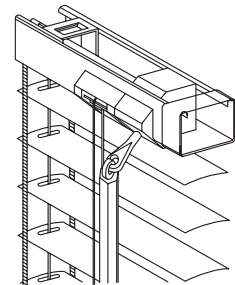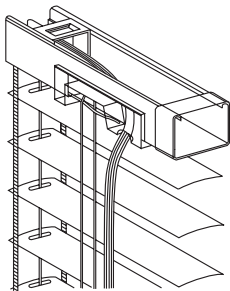

Type 3 - interior blind with flexible joint

Type 5 - interior blind with worm gear

Basic shapes of slope venetian blinds







1 A

1 B

4 A

4 B






2 A

2 B

5 A




5 B

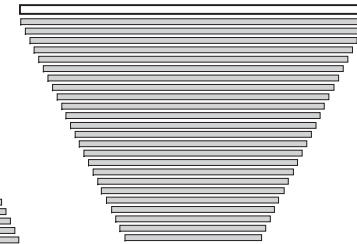

3 A

3 B

6

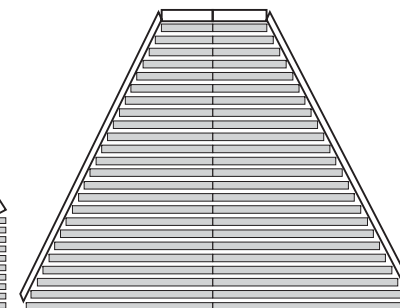

7

8

9



Individuální řešení pro atypická okna.
Dokonalé zastínění pomocí krycích lamel.